

Pushbutton Ø 16 mm silver contact

82-4152.2000



<https://eao.com/p/82-4152.2000>

Your product:



82-4152.2000

Pushbutton Ø 16 mm silver contact

FRONT

Front bezel shape:	flush
Front bezel material:	Stainless steel

MOUNTING

Mounting cut-out:	Ø 16 mm
-------------------	---------

OPERATING-/INDICATION PART

Lens illumination:	non illuminative
Lens optics:	opaque
Lens colour:	Silver
Lens shape:	flush
Lens material:	Stainless steel

ELECTRICAL CHARACTERISTICS

Rated insulation voltage U_i :	250 V
Electrical lifetime:	50 000 cycles of operation
Pollution degree:	2, according to EN IEC 60947-1
Electric strength:	1500 VAC, 50 Hz 1 minute between life terminals and ground
Thermal current I_{th} :	5 A
Contacts:	1 C
Switching voltage and switching current:	

according to IEC 60947-5-1 (Silver contacts)

Service categorie AC-15

Voltage

24 VAC

35 VAC

110 VAC

220 VAC

Current

1 A

1 A (M12 version)

1 A

0.5 A

Switch rating DC service categorie DC-13 (Silver contacts)

Voltage

24 VDC

35 VDC

110 VDC

220 VDC

Current

0.7 A

0.5 A (M12 version)

0.2 A

0.1 A

according to UL 508 (Silver contacts)

$\cos\phi$ 0,75 ... 0,8

Voltage

120 VAC

240 VAC

24 VAC

Current

5 A

3 A

1 A

Rated Operational Voltage Ue: 250 VAC

MECHANICAL CHARACTERISTIC

Switching action: Maintained

Weight: 0.018 kg

Tightening torque: 0.5 ... 0.6 Nm, Screw terminal 0.1 Nm

Operating force: 4 N ... 7 N

Contact material: Silver

Switching system: Snap-action switching element

Terminal: Screw terminal

Mechanical lifetime: 500 000 cycles of operation

Operating Travel: ca. 3 mm

AMBIENT CONDITION

Shock resistance: Max. 500 m / s² as per IEC 60068-2-27

Storage temperature: – 40 °C ... + 80 °C

Operating temperature: – 30 °C ... + 70 °C

Vibration resistance: 10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

Climate resistance: Damp heat, 21 days according to IEC 60512-11

CERTIFICATE

Conformities:

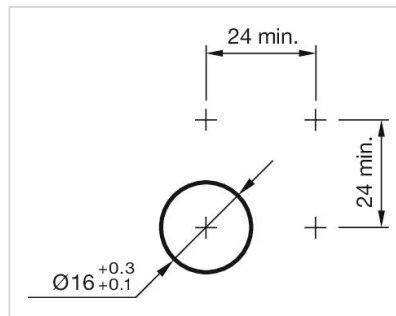
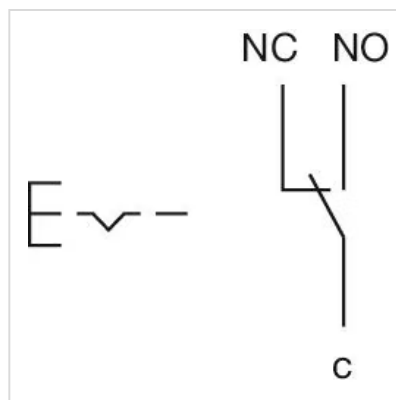
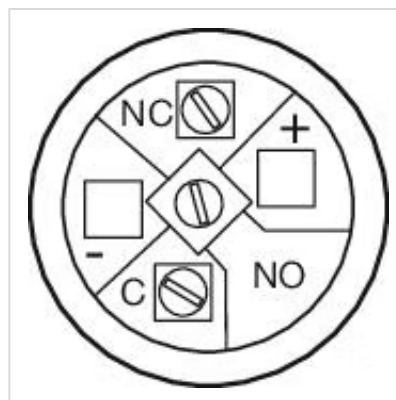
CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

Approbations:

CB, CCC, C UL, UL

OTHER**Short Description:**

Pushbutton Ø 16 mm silver contact, Maintained, 1 C, Screw terminal, Stainless steel, Silver

Mounting cut-outs:**Wiring diagrams:****Component layouts:****Dimension drawings:**

