

Illuminated pushbutton Ø 16 mm silver contact

82-4152.2123



<https://eao.com/p/82-4152.2123>

Your product:



82-4152.2123

Illuminated pushbutton Ø
16 mm silver contact

FRONT

Front bezel material: Stainless steel

Front bezel shape: flush

MOUNTING

Mounting cut-out: Ø 16 mm

OPERATING-/INDICATION PART

Shape of illumination: Ring

Illumination colour: Blue

Lens optics: opaque

Lens illumination: illuminative

Lens colour: Silver

Lens material: Stainless steel

Lens shape: flush

ELECTRICAL CHARACTERISTICS

Contacts: 1 C

Electric strength: 1500 VAC, 50 Hz 1 minute between life terminals and ground

Pollution degree: 2, according to EN IEC 60947-1

Thermal current I_{th}: 5 A

Rated Operational Voltage U_e: 250 VAC

Operating voltage: 12 V AC/DC

Switching voltage and switching current:

according to IEC 60947-5-1 (Silver contacts)	
Service categorie AC-15	
Voltage	Current
24 VAC	1 A
35 VAC	1 A (M12 versio
110 VAC	1 A
220 VAC	0.5 A
Switch rating DC service categorie DC-13 (Silver contacts)	
Voltage	Current
24 VDC	0.7 A
35 VDC	0.5 A (M12 vers
110 VDC	0.2 A
220 VDC	0.1 A

according to UL 508 (Silver contacts)	
$\cos\phi$ 0,75 ... 0,8	
Voltage	Current
120 VAC	5 A
240 VAC	3 A
24 VAC	1 A

Rated insulation voltage U_i : 250 V

Electrical lifetime: 50 000 cycles of operation

MECHANICAL CHARACTERISTIC

Contact material:	Silver
Switching system:	Snap-action switching element
Operating Travel:	ca. 3 mm
Mechanical lifetime:	500 000 cycles of operation
Switching action:	Maintained
Operating force:	4 N ... 7 N
Weight:	0.018 kg
Tightening torque:	0.5 ... 0.6 Nm, Screw terminal 0.1 Nm
Terminal:	Screw terminal

AMBIENT CONDITION

Shock resistance:	Max. 500 m / s ² as per IEC 60068-2-27
Vibration resistance:	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6
Operating temperature:	- 30 °C ... + 70 °C
Storage temperature:	- 40 °C ... + 80 °C
Climate resistance:	Damp heat, 21 days according to IEC 60512-11

CERTIFICATE

Conformities: CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)


Approbations: CB, CCC, C UL, UL

OTHER

Kind of illumination: Single-LED


Short Description: Illuminated pushbutton Ø 16 mm silver contact, Maintained, 12 V AC/DC, 1 C, Screw terminal, Stainless steel, Blue, Silver

Dimension drawings:

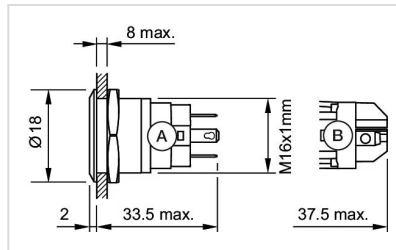


A = Solder terminal
B = Screw terminal

Component layouts:

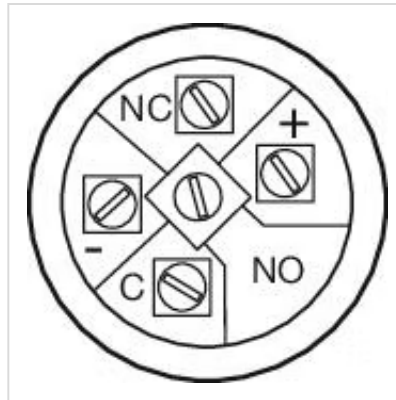

Wiring diagrams:

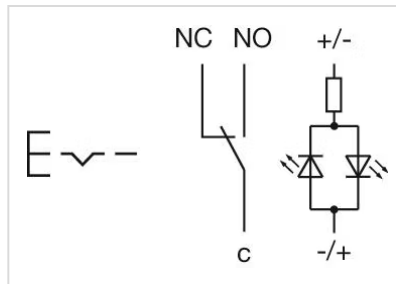

Mounting cut-outs:

