

Pushbutton Ø 16 mm silver contact

82-4161.1000.B001



<https://eao.com/p/82-4161.1000.B001>

Your product:



82-4161.1000.B001
Pushbutton Ø 16 mm silver contact

FRONT

Front bezel shape:	flush
Front bezel material:	Stainless steel

MOUNTING

Mounting cut-out:	Ø 16 mm
--------------------------	---------

OPERATING-/INDICATION PART

Lens illumination:	non illuminative
Lens shape:	raised
Lens colour:	Silver
Lens material:	Stainless steel
Lens optics:	opaque

ELECTRICAL CHARACTERISTICS

Pollution degree:	2, according to EN IEC 60947-1
Thermal current Ith:	5 A
Rated Operational Voltage Ue:	250 VAC
Electrical lifetime:	50 000 cycles of operation
Rated insulation voltage Ui:	250 V
Electric strength:	1500 VAC, 50 Hz 1 minute between life terminals and ground
Contacts:	1 C
Switching voltage and switching current:	

according to IEC 60947-5-1 (Silver contacts)

Service categorie AC-15

Voltage	Current
24 VAC	1 A
35 VAC	1 A (M12 version)
110 VAC	1 A
220 VAC	0.5 A
Switch rating DC service categorie DC-13 (Silver contacts)	
Voltage	Current
24 VDC	0.7 A
35 VDC	0.5 A (M12 version)
110 VDC	0.2 A
220 VDC	0.1 A

according to UL 508 (Silver contacts)

$\cos\phi$ 0,75 ... 0,8

Voltage	Current
120 VAC	5 A
240 VAC	3 A
24 VAC	1 A

MECHANICAL CHARACTERISTIC

Weight:	0.02 kg
Switching system:	Snap-action switching element
Switching action:	Momentary
Tightening torque:	0.5 ... 0.6 Nm
Operating force:	4 N ... 7 N
Terminal:	Soldering terminal, 2.8 x 0.5 mm
Operating Travel:	ca. 3 mm
Contact material:	Silver
Mechanical lifetime:	1 Mio. cycles of operation

AMBIENT CONDITION

Storage temperature:	- 40 °C ... + 80 °C
Vibration resistance:	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6
Climate resistance:	Damp heat, 21 days according to IEC 60512-11
Operating temperature:	- 30 °C ... + 70 °C
Shock resistance:	Max. 500 m / s ² as per IEC 60068-2-27

CERTIFICATE

Conformities: CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

Approbations:

CB, CCC, C UL, UL

OTHER


Short Description:

Pushbutton Ø 16 mm silver contact, Momentary, 1 C, Soldering terminal, 2.8 x 0.5 mm, Stainless steel, ON/OFF, Silver

Symbol:


ON/OFF

Dimension drawings:

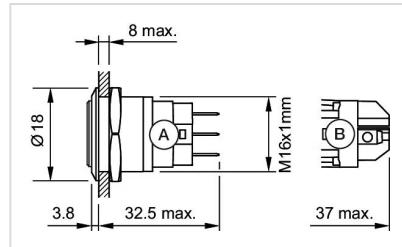


A = Solder terminal
B = Screw terminal

Component layouts:

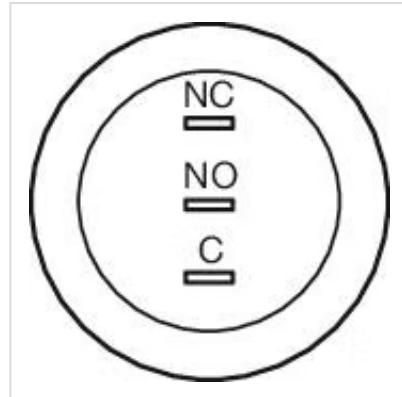

Wiring diagrams:

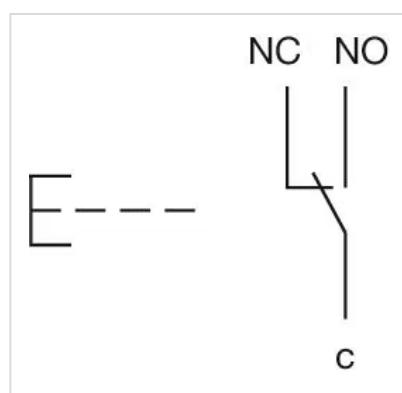

Mounting cut-outs:

