

Pushbutton Ø 16 mm silver contact

82-4561.2000



<https://eao.com/p/82-4561.2000>

Your product:



82-4561.2000
Pushbutton Ø 16 mm silver contact

FRONT

Front bezel shape:	flush
Front bezel material:	Aluminium

MOUNTING

Mounting cut-out:	Ø 16 mm
--------------------------	---------

OPERATING-/INDICATION PART

Lens shape:	raised
Lens colour:	Nature
Lens illumination:	non illuminative
Lens optics:	opaque
Lens material:	Aluminium

ELECTRICAL CHARACTERISTICS

Pollution degree:	2, according to EN IEC 60947-1
Switching voltage and switching current:	according to IEC 60947-5-1 (Silver contacts) Service categorie AC-15
Voltage	Current
24 VAC	1 A
35 VAC	1 A (M12 versio
110 VAC	1 A
220 VAC	0.5 A
Switch rating DC service categorie DC-13 (Silver contacts)	
Voltage	Current
24 VDC	0.7 A
35 VDC	0.5 A (M12 vers
110 VDC	0.2 A
220 VDC	0.1 A

according to UL 508 (Silver contacts)

$\cos\phi$ 0,75 ... 0,8

Voltage	Current
120 VAC	5 A
240 VAC	3 A
24 VAC	1 A

Rated Operational Voltage Ue: 250 VAC

Electric strength: 1500 VAC, 50 Hz 1 minute between live terminals and ground

Thermal current Ith: 5 A

Rated insulation voltage Ui: 250 V

Electrical lifetime: 50 000 cycles of operation

Contacts: 1 C

MECHANICAL CHARACTERISTIC

Switching system: Snap-action switching element

Terminal: Soldering terminal, 2.8 x 0.5 mm

Contact material: Silver

Switching action: Maintained

Mechanical lifetime: 500 000 cycles of operation

Tightening torque: 0.5 ... 0.6 Nm

Operating Travel: ca. 3 mm

Operating force: 4 N ... 7 N

Weight: 0.02 kg

AMBIENT CONDITION

Climate resistance: Damp heat, 21 days according to IEC 60512-11

Operating temperature: - 30 °C ... + 70 °C

Vibration resistance: 10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

Storage temperature: - 40 °C ... + 80 °C

Shock resistance: Max. 500 m / s² as per IEC 60068-2-27

CERTIFICATE

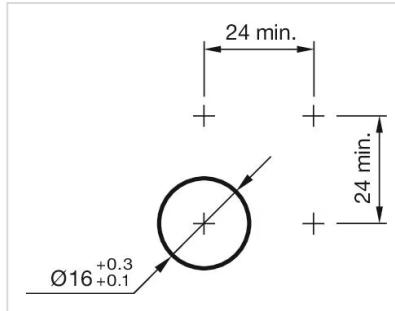
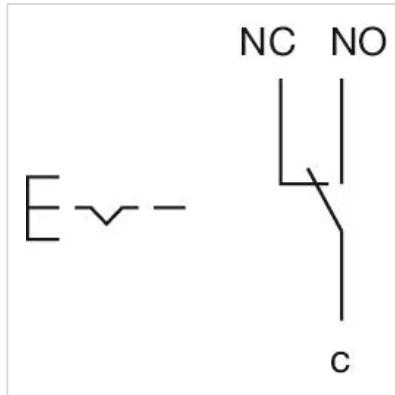
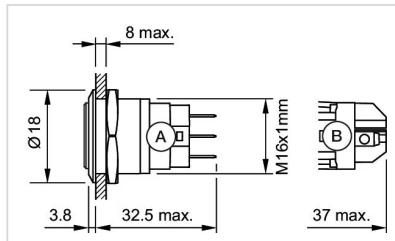
Approbations: CB, CCC, C UL, UL

Conformities: CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

OTHER

Short Description:

Pushbutton Ø 16 mm silver contact, Maintained, 1 C, Soldering terminal, 2.8 x 0.5 mm, Aluminium, Nature

Mounting cut-outs:**Wiring diagrams:****Dimension drawings:**

A = Solder terminal
B = Screw terminal

Component layouts: