

Pushbutton Ø 16 mm silver contact

82-4572.2000



<https://eao.com/p/82-4572.2000>

Your product:



82-4572.2000
Pushbutton Ø 16 mm silver contact

FRONT

Front bezel material:	Aluminium
Front bezel shape:	flush

MOUNTING

Mounting cut-out:	Ø 16 mm
-------------------	---------

OPERATING-/INDICATION PART

Lens shape:	convex
Lens colour:	Nature
Lens optics:	opaque
Lens material:	Aluminium
Lens illumination:	non illuminative

ELECTRICAL CHARACTERISTICS

Switching voltage and switching current:	according to IEC 60947-5-1 (Silver contacts)	
	Service categorie AC-15	
	Voltage	Current
	24 VAC	1 A
	35 VAC	1 A (M12 versio
	110 VAC	1 A
	220 VAC	0.5 A
	Switch rating DC service categorie DC-13 (Silver contacts)	
	Voltage	Current
	24 VDC	0.7 A
	35 VDC	0.5 A (M12 vers
	110 VDC	0.2 A
	220 VDC	0.1 A

according to UL 508 (Silver contacts)

$\cos\phi$ 0,75 ... 0,8

Voltage

120 VAC

240 VAC

24 VAC

Current

5 A

3 A

1 A

Electrical lifetime:	50 000 cycles of operation
Pollution degree:	2, according to EN IEC 60947-1
Rated Operational Voltage Ue:	250 VAC
Contacts:	1 C
Electric strength:	1500 VAC, 50 Hz 1 minute between life terminals and ground
Rated insulation voltage Ui:	250 V
Thermal current Ith:	5 A

MECHANICAL CHARACTERISTIC

Switching action:	Maintained
Contact material:	Silver
Mechanical lifetime:	500 000 cycles of operation
Operating force:	4 N ... 7 N
Tightening torque:	0.5 ... 0.6 Nm, Screw terminal 0.1 Nm
Operating Travel:	ca. 3 mm
Switching system:	Snap-action switching element
Terminal:	Screw terminal
Weight:	0.019 kg

AMBIENT CONDITION

Climate resistance:	Damp heat, 21 days according to IEC 60512-11
Storage temperature:	- 40 °C ... + 80 °C
Operating temperature:	- 30 °C ... + 70 °C
Shock resistance:	Max. 500 m / s ² as per IEC 60068-2-27
Vibration resistance:	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

CERTIFICATE

Conformities:

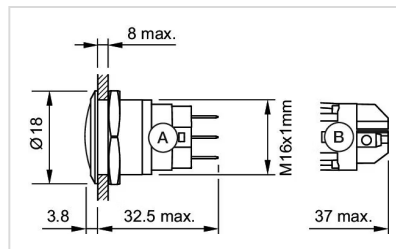
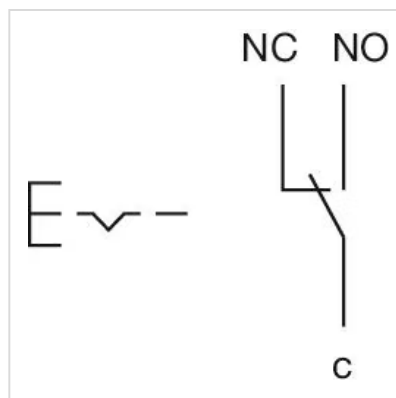
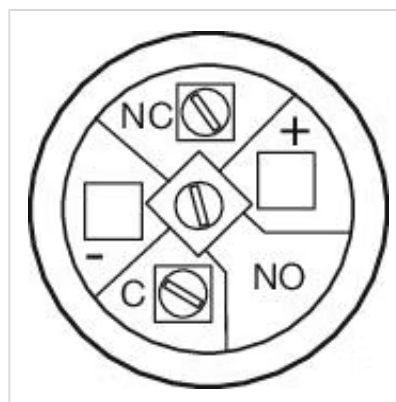
CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

Approbations:

CB, CCC, C UL, UL

OTHER**Short Description:**

Pushbutton Ø 16 mm silver contact, Maintained, 1 C, Screw terminal, Aluminium, Nature

Dimension drawings:A = Solder terminal
B = Screw terminal**Wiring diagrams:****Component layouts:****Mounting cut-outs:**

