

## Illuminated pushbutton Ø 19 mm silver contact

82-5152.1124.B002



<https://eao.com/p/82-5152.1124.B002>

Your product:

---



82-5152.1124.B002  
Illuminated pushbutton Ø  
19 mm silver contact

#### FRONT

<b>Front bezel shape:</b>	flush
<b>Front bezel material:</b>	Stainless steel

#### MOUNTING

<b>Mounting cut-out:</b>	Ø 19 mm
--------------------------	---------

#### OPERATING-/INDICATION PART

<b>Lens material:</b>	Stainless steel
<b>Lens illumination:</b>	illuminative
<b>Shape of illumination:</b>	Ring
<b>Lens shape:</b>	flush
<b>Illumination colour:</b>	Blue
<b>Lens colour:</b>	Silver
<b>Lens optics:</b>	opaque

#### ELECTRICAL CHARACTERISTICS

<b>Electric strength:</b>	1500 VAC, 50 Hz 1 minute between life terminals and ground
<b>Operating voltage:</b>	24 V DC
<b>Rated insulation voltage Ui:</b>	250 V
<b>Electrical lifetime:</b>	50 000 cycles of operation
<b>Rated Operational Voltage Ue:</b>	250 VAC
<b>Contacts:</b>	1 C

<b>Pollution degree:</b>	2, according to EN IEC 60947-1																				
<b>Switching voltage and switching current:</b>	<p>according to IEC 60947-5-1 (Silver contacts)  Service categorie AC-15</p> <table> <tr> <td>Voltage</td> <td>Current</td> </tr> <tr> <td>24 VAC</td> <td>1 A</td> </tr> <tr> <td>35 VAC</td> <td>1 A (M12 versio</td> </tr> <tr> <td>110 VAC</td> <td>1 A</td> </tr> <tr> <td>220 VAC</td> <td>0.5 A</td> </tr> </table> <p>Switch rating DC service categorie DC-13 (Silver contacts)</p> <table> <tr> <td>Voltage</td> <td>Current</td> </tr> <tr> <td>24 VDC</td> <td>0.7 A</td> </tr> <tr> <td>35 VDC</td> <td>0.5 A (M12 vers</td> </tr> <tr> <td>110 VDC</td> <td>0.2 A</td> </tr> <tr> <td>220 VDC</td> <td>0.1 A</td> </tr> </table>	Voltage	Current	24 VAC	1 A	35 VAC	1 A (M12 versio	110 VAC	1 A	220 VAC	0.5 A	Voltage	Current	24 VDC	0.7 A	35 VDC	0.5 A (M12 vers	110 VDC	0.2 A	220 VDC	0.1 A
Voltage	Current																				
24 VAC	1 A																				
35 VAC	1 A (M12 versio																				
110 VAC	1 A																				
220 VAC	0.5 A																				
Voltage	Current																				
24 VDC	0.7 A																				
35 VDC	0.5 A (M12 vers																				
110 VDC	0.2 A																				
220 VDC	0.1 A																				
	according to UL 508 (Silver contacts) $\cos\phi$ 0,75 ... 0,8																				
	<table> <tr> <td>Voltage</td> <td>Current</td> </tr> <tr> <td>120 VAC</td> <td>5 A</td> </tr> <tr> <td>240 VAC</td> <td>3 A</td> </tr> <tr> <td>24 VAC</td> <td>1 A</td> </tr> </table>	Voltage	Current	120 VAC	5 A	240 VAC	3 A	24 VAC	1 A												
Voltage	Current																				
120 VAC	5 A																				
240 VAC	3 A																				
24 VAC	1 A																				
<b>Thermal current <math>I_{th}</math>:</b>	5 A																				

## MECHANICAL CHARACTERISTIC

<b>Contact material:</b>	Silver
<b>Switching action:</b>	Momentary
<b>Switching system:</b>	Snap-action switching element
<b>Tightening torque:</b>	0.5 ... 0.6 Nm, Screw terminal 0.1 Nm
<b>Operating Travel:</b>	ca. 3 mm
<b>Mechanical lifetime:</b>	1 Mio. cycles of operation
<b>Terminal:</b>	Screw terminal
<b>Operating force:</b>	4 N ... 7 N
<b>Weight:</b>	0.018 kg

## AMBIENT CONDITION

<b>Climate resistance:</b>	Damp heat, 21 days according to IEC 60512-11
<b>Storage temperature:</b>	- 40 °C ... + 80 °C
<b>Vibration resistance:</b>	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6
<b>Operating temperature:</b>	- 30 °C ... + 70 °C
<b>Shock resistance:</b>	Max. 500 m / s <sup>2</sup> as per IEC 60068-2-27

## CERTIFICATE

**Approbations:** CB, CCC, C UL, UL

**Conformities:** CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)


## OTHER

**Kind of illumination:** Single-LED


**Symbol:** Standby

**Short Description:** Illuminated pushbutton Ø 19 mm silver contact, Momentary, 24 V DC, 1 C, Screw terminal, Stainless steel, Blue, Standby, Silver


**Wiring diagrams:**

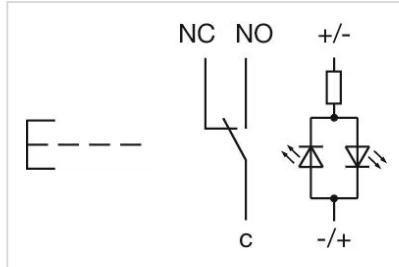

**Mounting cut-outs:**

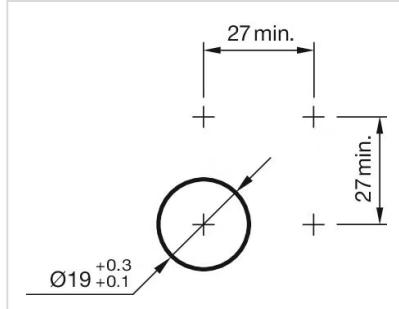

**Dimension drawings:**

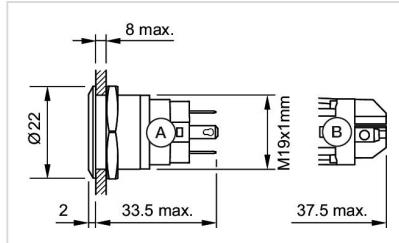

A = Solder terminal  
B = Screw terminal

**Component layouts:**

