

## Illuminated pushbutton Ø 19 mm silver contact

82-5152.1133



<https://eao.com/p/82-5152.1133>

Your product:

---



82-5152.1133  
Illuminated pushbutton Ø  
19 mm silver contact

#### FRONT

**Front bezel material:** Stainless steel  
**Front bezel shape:** flush

#### MOUNTING

**Mounting cut-out:** Ø 19 mm

#### OPERATING-/INDICATION PART

**Lens colour:** Silver  
**Lens shape:** flush  
**Illumination colour:** Green  
**Shape of illumination:** Ring  
**Lens optics:** opaque  
**Lens material:** Stainless steel  
**Lens illumination:** illuminative

#### ELECTRICAL CHARACTERISTICS

**Contacts:** 1 C  
**Operating voltage:** 12 V AC/DC  
**Electrical lifetime:** 50 000 cycles of operation  
**Electric strength:** 1500 VAC, 50 Hz 1 minute between life terminals and ground  
**Rated insulation voltage Ui:** 250 V  
**Switching voltage and switching current:**

according to IEC 60947-5-1 (Silver contacts)

Service categorie AC-15

Voltage	Current
24 VAC	1 A
35 VAC	1 A (M12 version)
110 VAC	1 A
220 VAC	0.5 A

Switch rating DC service categorie DC-13 (Silver contacts)

Voltage	Current
24 VDC	0.7 A
35 VDC	0.5 A (M12 version)
110 VDC	0.2 A
220 VDC	0.1 A

according to UL 508 (Silver contacts)

$\cos\phi$  0,75 ... 0,8

Voltage	Current
120 VAC	5 A
240 VAC	3 A
24 VAC	1 A

**Thermal current  $I_{th}$ :** 5 A

**Rated Operational Voltage  $U_e$ :** 250 VAC

**Pollution degree:** 2, according to EN IEC 60947-1

## MECHANICAL CHARACTERISTIC

**Contact material:** Silver

**Tightening torque:** 0.5 ... 0.6 Nm

**Weight:** 0.018 kg

**Switching action:** Momentary

**Mechanical lifetime:** 1 Mio. cycles of operation

**Terminal:** Screw terminal

**Operating Travel:** ca. 3 mm

**Operating force:** 4 N ... 7 N

**Switching system:** Snap-action switching element

## AMBIENT CONDITION

**Storage temperature:** - 40 °C ... + 80 °C

**Shock resistance:** Max. 500 m / s<sup>2</sup> as per IEC 60068-2-27

**Vibration resistance:** 10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

**Operating temperature:** - 30 °C ... + 70 °C

**Climate resistance:** Damp heat, 21 days according to IEC 60512-11

## CERTIFICATE

**Approbations:** CB, CCC, C UL, UL


**Conformities:** CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

## OTHER


**Short Description:** Illuminated pushbutton Ø 19 mm silver contact, Momentary, 12 V AC/DC, 1 C, Screw terminal, Stainless steel, Green, Silver

**Kind of illumination:** Single-LED


**Component layouts:**

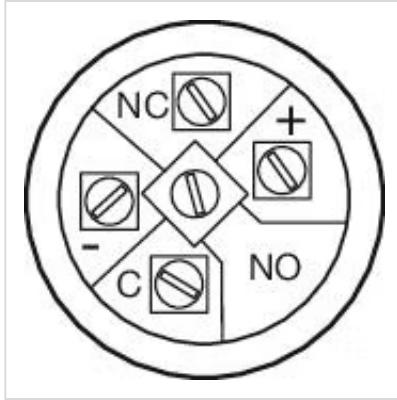

**Wiring diagrams:**

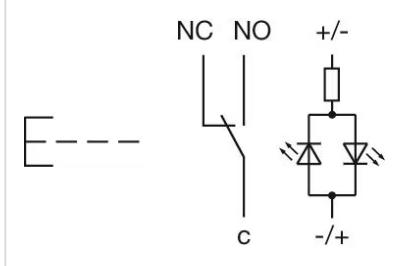

**Dimension drawings:**

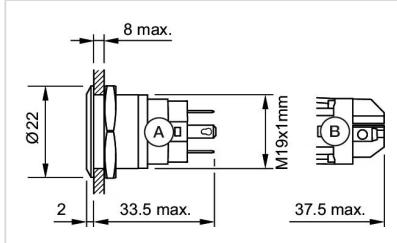

A = Solder terminal  
B = Screw terminal

**Mounting cut-outs:**

