

Pushbutton Ø 19 mm silver contact

82-5152.2000.B002



<https://eao.com/p/82-5152.2000.B002>

Your product:



82-5152.2000.B002

Pushbutton Ø 19 mm silver contact

FRONT

Front bezel shape: flush

Front bezel material: Stainless steel

MOUNTING

Mounting cut-out: Ø 19 mm

OPERATING-/INDICATION PART

Lens material: Stainless steel

Lens optics: opaque

Lens colour: Silver

Lens illumination: non illuminative

Lens shape: flush

ELECTRICAL CHARACTERISTICS

Electric strength: 1500 VAC, 50 Hz 1 minute between life terminals and ground

Rated Operational Voltage U_e: 250 VAC

Thermal current I_{th}: 5 A

Switching voltage and switching current:

according to IEC 60947-5-1 (Silver contacts)

Service categorie AC-15

Voltage

24 VAC

35 VAC

110 VAC

220 VAC

Current

1 A

1 A (M12 version)

1 A

0.5 A

Switch rating DC service categorie DC-13 (Silver contacts)

Voltage

24 VDC

35 VDC

110 VDC

220 VDC

Current

0.7 A

0.5 A (M12 version)

0.2 A

0.1 A

according to UL 508 (Silver contacts)

$\cos\phi$ 0,75 ... 0,8

Voltage

120 VAC

240 VAC

24 VAC

Current

5 A

3 A

1 A

Rated insulation voltage U_i:	250 V
Electrical lifetime:	50 000 cycles of operation
Pollution degree:	2, according to EN IEC 60947-1

MECHANICAL CHARACTERISTIC

Operating Travel:	ca. 3 mm
Switching action:	Maintained
Mechanical lifetime:	500 000 cycles of operation
Contact material:	Silver
Operating force:	4 N ... 7 N
Terminal:	Screw terminal
Switching system:	Snap-action switching element
Tightening torque:	0.5 ... 0.6 Nm, Screw terminal 0.1 Nm
Weight:	0.018 kg

AMBIENT CONDITION

Climate resistance:	Damp heat, 21 days according to IEC 60512-11
Operating temperature:	– 30 °C ... + 70 °C
Vibration resistance:	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6
Shock resistance:	Max. 500 m / s ² as per IEC 60068-2-27
Storage temperature:	– 40 °C ... + 80 °C

CERTIFICATE

Approbations: CB, CCC, C UL, UL


Conformities: CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

OTHER


Symbol: Standby

Short Description: Pushbutton Ø 19 mm silver contact, Maintained, Screw terminal, Stainless steel, Standby, Silver


Component layouts:

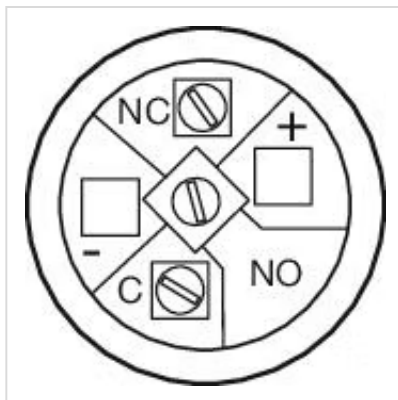

Wiring diagrams:

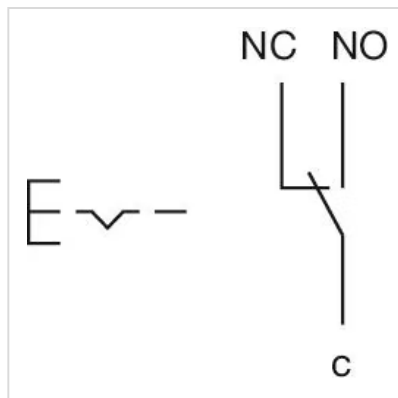

Dimension drawings:

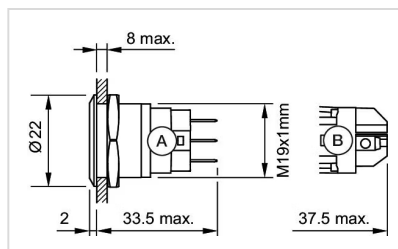

A = Solder terminal
B = Screw terminal

Mounting cut-outs:

