

## Pushbutton Ø 19 mm silver contact

82-5551.2000



<https://eao.com/p/82-5551.2000>

Your product:



82-5551.2000  
Pushbutton Ø 19 mm silver contact

FRONT

Front bezel material:	Aluminium
Front bezel shape:	flush

MOUNTING

Mounting cut-out:	Ø 19 mm
-------------------	---------

OPERATING-/INDICATION PART

Lens optics:	opaque
Lens material:	Aluminium
Lens colour:	Nature
Lens illumination:	non illuminative
Lens shape:	flush

ELECTRICAL CHARACTERISTICS

Thermal current I <sub>th</sub> :	5 A		
Switching voltage and switching current:	according to IEC 60947-5-1 (Silver contacts)		
	Service categorie AC-15		
	Voltage	Current	
	24 VAC	1 A	
	35 VAC	1 A (M12 version)	
	110 VAC	1 A	
	220 VAC	0.5 A	
	Switch rating DC service categorie DC-13 (Silver contacts)		
	Voltage	Current	
	24 VDC	0.7 A	
35 VDC	0.5 A (M12 version)		
110 VDC	0.2 A		
220 VDC	0.1 A		

according to UL 508 (Silver contacts)

$\cos\phi$  0,75 ... 0,8

Voltage

120 VAC

240 VAC

24 VAC

Current

5 A

3 A

1 A

<b>Pollution degree:</b>	2, according to EN IEC 60947-1
<b>Contacts:</b>	1 C
<b>Rated Operational Voltage Ue:</b>	250 VAC
<b>Rated insulation voltage Ui:</b>	250 V
<b>Electric strength:</b>	1500 VAC, 50 Hz 1 minute between life terminals and ground
<b>Electrical lifetime:</b>	50 000 cycles of operation

### MECHANICAL CHARACTERISTIC

<b>Tightening torque:</b>	0.5 ... 0.6 Nm
<b>Weight:</b>	0.018 kg
<b>Contact material:</b>	Silver
<b>Operating Travel:</b>	ca. 3 mm
<b>Terminal:</b>	Soldering terminal, 2.8 x 0.5 mm
<b>Switching system:</b>	Snap-action switching element
<b>Mechanical lifetime:</b>	500 000 cycles of operation
<b>Switching action:</b>	Maintained
<b>Operating force:</b>	4 N ... 7 N

### AMBIENT CONDITION

<b>Vibration resistance:</b>	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6
<b>Storage temperature:</b>	- 40 °C ... + 80 °C
<b>Shock resistance:</b>	Max. 500 m / s <sup>2</sup> as per IEC 60068-2-27
<b>Operating temperature:</b>	- 30 °C ... + 70 °C
<b>Climate resistance:</b>	Damp heat, 21 days according to IEC 60512-11

### CERTIFICATE


<b>Approbations:</b>	CB, CCC, C UL, UL
<b>Conformities:</b>	CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

OTHER


**Short Description:**

Pushbutton Ø 19 mm silver contact, Maintained, 1 C, Soldering terminal, 2.8 x 0.5 mm, Aluminium, Nature


**Mounting cut-outs:**

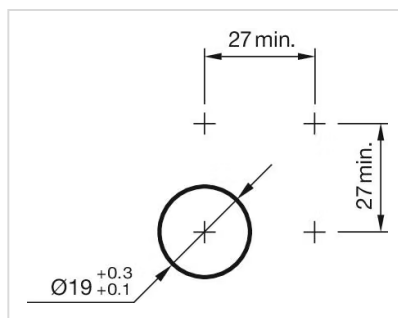


**Component layouts:**

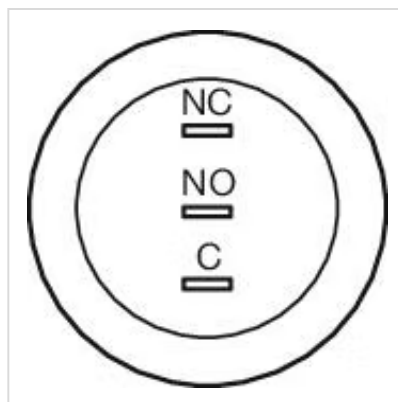

**Wiring diagrams:**

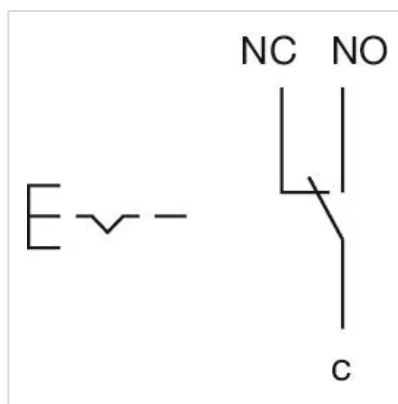

**Dimension drawings:**

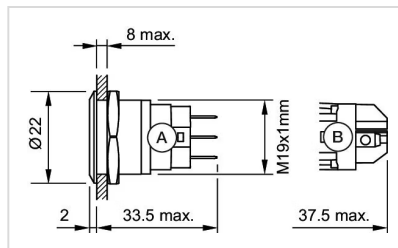

A = Solder terminal  
B = Screw terminal