

Illuminated pushbutton Ø 22 mm silver contact

82-6152.1113.B002



<https://eao.com/p/82-6152.1113.B002>

Your product:



82-6152.1113.B002

Illuminated pushbutton Ø
22 mm silver contact

FRONT

Front bezel shape:	flush
Front bezel material:	Stainless steel

MOUNTING

Mounting cut-out:	Ø 22 mm
-------------------	---------

OPERATING-/INDICATION PART

Illumination colour:	Red
Lens illumination:	illuminative
Lens shape:	flush
Lens colour:	Silver
Shape of illumination:	Ring
Lens material:	Stainless steel
Lens optics:	opaque

ELECTRICAL CHARACTERISTICS

Rated Operational Voltage U _e :	250 VAC
Operating voltage:	12 V AC/DC
Rated insulation voltage U _i :	250 V
Switching voltage and switching current:	

according to IEC 60947-5-1 (Silver contacts)

Service categorie AC-15

Voltage

24 VAC

35 VAC

110 VAC

220 VAC

Current

1 A

1 A (M12 version)

1 A

0.5 A

Switch rating DC service categorie DC-13 (Silver contacts)

Voltage

24 VDC

35 VDC

110 VDC

220 VDC

Current

0.7 A

0.5 A (M12 version)

0.2 A

0.1 A

according to UL 508 (Silver contacts)

$\cos\phi$ 0,75 ... 0,8

Voltage

120 VAC

240 VAC

24 VAC

Current

5 A

3 A

1 A

Pollution degree:

2, according to EN IEC 60947-1

Thermal current I_{th}:

5 A

Electrical lifetime:

50 000 cycles of operation

Electric strength:

1500 VAC, 50 Hz 1 minute between life terminals and ground

Contacts:

1 C

MECHANICAL CHARACTERISTIC

Operating Travel:

ca. 3 mm

Terminal:

Screw terminal

Contact material:

Silver

Weight:

0.018 kg

Switching system:

Snap-action switching element

Mechanical lifetime:

1 Mio. cycles of operation

Operating force:

4 N ... 7 N

Switching action:

Momentary

Tightening torque:

0.5 ... 0.6 Nm, Screw terminal 0.1 Nm

AMBIENT CONDITION

Vibration resistance:

10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

Shock resistance:

Max. 500 m / s² as per IEC 60068-2-27

Operating temperature:

– 30 °C ... + 70 °C

Storage temperature:

– 40 °C ... + 80 °C

Climate resistance:

Damp heat, 21 days according to IEC 60512-11

CERTIFICATE

Conformities:

CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

Approbations:

CB, CCC, C UL, UL

OTHER

Short Description:

Illuminated pushbutton Ø 22 mm silver contact, Momentary, 12 V AC/DC, 1 C, Screw terminal, Stainless steel, Red, Standby, Silver


Symbol:

Standby


Kind of illumination:

Single-LED


Wiring diagrams:

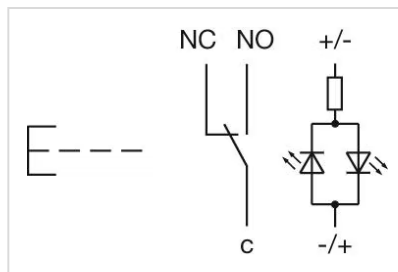


Component layouts:

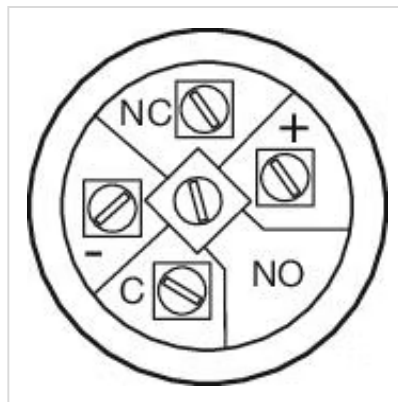

Mounting cut-outs:

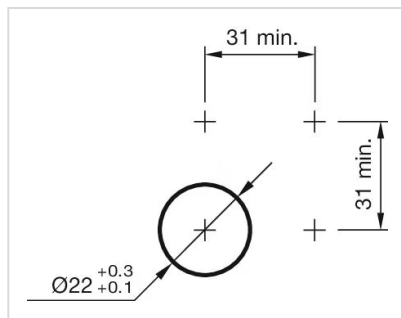

Dimension drawings:

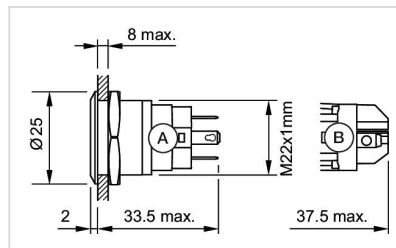

A = Solder terminal
B = Screw terminal