

Illuminated pushbutton Ø 22 mm silver contact

82-6152.1123.B002



<https://eao.com/p/82-6152.1123.B002>

Your product:



82-6152.1123.B002

Illuminated pushbutton Ø
22 mm silver contact

FRONT

Front bezel shape:	flush
Front bezel material:	Stainless steel

MOUNTING

Mounting cut-out:	Ø 22 mm
-------------------	---------

OPERATING-/INDICATION PART

Illumination colour:	Blue
Lens material:	Stainless steel
Shape of illumination:	Ring
Lens colour:	Silver
Lens optics:	opaque
Lens shape:	flush
Lens illumination:	illuminative

ELECTRICAL CHARACTERISTICS

Electric strength:	1500 VAC, 50 Hz 1 minute between life terminals and ground
Pollution degree:	2, according to EN IEC 60947-1
Operating voltage:	12 V AC/DC
Rated Operational Voltage U _e :	250 VAC
Electrical lifetime:	50 000 cycles of operation
Rated insulation voltage U _i :	250 V

Thermal current I_{th}:	5 A		
Contacts:	1 C		
Switching voltage and switching current:	according to IEC 60947-5-1 (Silver contacts) Service categorie AC-15 Voltage 24 VAC 35 VAC 110 VAC 220 VAC Switch rating DC service categorie DC-13 (Silver contacts) Voltage 24 VDC 35 VDC 110 VDC 220 VDC		
			Current 1 A 1 A (M12 versio 1 A 0.5 A
			Current 0.7 A 0.5 A (M12 vers 0.2 A 0.1 A
	according to UL 508 (Silver contacts) cosφ 0,75 ... 0,8 Voltage 120 VAC 240 VAC 24 VAC		
		Current	5 A 3 A 1 A

MECHANICAL CHARACTERISTIC

Mechanical lifetime:	1 Mio. cycles of operation
Contact material:	Silver
Operating Travel:	ca. 3 mm
Weight:	0.018 kg
Tightening torque:	0.5 ... 0.6 Nm, Screw terminal 0.1 Nm
Operating force:	4 N ... 7 N
Terminal:	Screw terminal
Switching system:	Snap-action switching element
Switching action:	Momentary

AMBIENT CONDITION

Climate resistance:	Damp heat, 21 days according to IEC 60512-11
Operating temperature:	– 30 °C ... + 70 °C
Vibration resistance:	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6
Storage temperature:	– 40 °C ... + 80 °C
Shock resistance:	Max. 500 m / s ² as per IEC 60068-2-27

CERTIFICATE

Conformities: CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

Approbations: CB, CCC, C UL, UL


OTHER

Symbol: Standby


Kind of illumination: Single-LED

Short Description: Illuminated pushbutton Ø 22 mm silver contact, Momentary, 12 V AC/DC, 1 C, Screw terminal, Stainless steel, Blue, Standby, Silver


Mounting cut-outs:

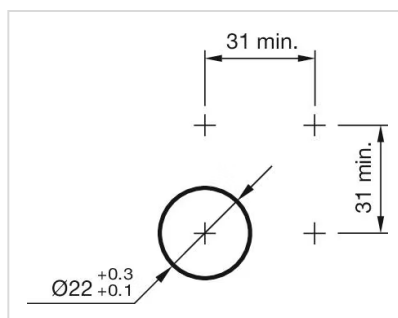


Wiring diagrams:

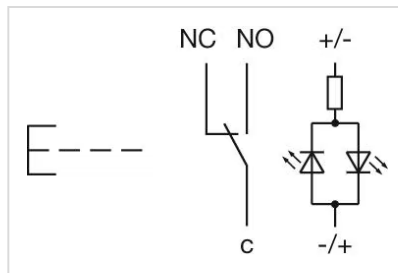

Component layouts:

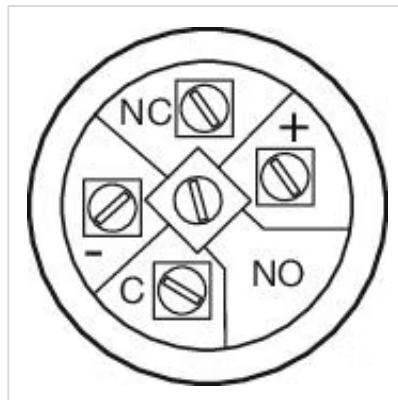

Dimension drawings:

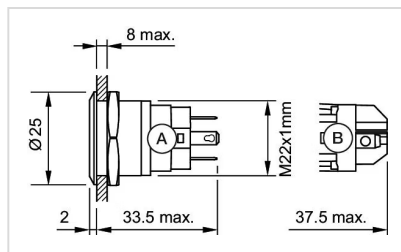

A = Solder terminal
B = Screw terminal