

Pushbutton Ø 22 mm silver contact

82-6152.2000.B001



<https://eao.com/p/82-6152.2000.B001>

Your product:



82-6152.2000.B001
Pushbutton Ø 22 mm silver contact

FRONT

Front bezel material: Stainless steel
Front bezel shape: flush

MOUNTING

Mounting cut-out: Ø 22 mm

OPERATING-/INDICATION PART

Lens illumination: non illuminative
Lens shape: flush
Lens colour: Silver
Lens material: Stainless steel
Lens optics: opaque

ELECTRICAL CHARACTERISTICS

Rated insulation voltage Ui: 250 V
Thermal current Ith: 5 A
Electric strength: 1500 VAC, 50 Hz 1 minute between live terminals and ground
Pollution degree: 2, according to EN IEC 60947-1
Switching voltage and switching current:

according to IEC 60947-5-1 (Silver contacts)

Service categorie AC-15

Voltage	Current
24 VAC	1 A
35 VAC	1 A (M12 version)
110 VAC	1 A
220 VAC	0.5 A

Switch rating DC service categorie DC-13 (Silver contacts)

Voltage	Current
24 VDC	0.7 A
35 VDC	0.5 A (M12 version)
110 VDC	0.2 A
220 VDC	0.1 A

according to UL 508 (Silver contacts)

$\cos\phi$ 0,75 ... 0,8

Voltage	Current
120 VAC	5 A
240 VAC	3 A
24 VAC	1 A

Rated Operational Voltage Ue: 250 VAC

Electrical lifetime: 50 000 cycles of operation

Contacts: 1 C

MECHANICAL CHARACTERISTIC

Operating force: 4 N ... 7 N

Mechanical lifetime: 500 000 cycles of operation

Terminal: Screw terminal

Contact material: Silver

Weight: 0.018 kg

Operating Travel: ca. 3 mm

Switching action: Maintained

Switching system: Snap-action switching element

Tightening torque: 0.5 ... 0.6 Nm, Screw terminal 0.1 Nm

AMBIENT CONDITION

Storage temperature: - 40 °C ... + 80 °C

Climate resistance: Damp heat, 21 days according to IEC 60512-11

Shock resistance: Max. 500 m / s² as per IEC 60068-2-27

Vibration resistance: 10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

Operating temperature: - 30 °C ... + 70 °C

CERTIFICATE

Conformities:

CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

Approbations:


CB, CCC, C UL, UL

OTHER

Symbol: ON/OFF


Short Description: Pushbutton Ø 22 mm silver contact, Maintained, 1 C, Screw terminal, Stainless steel, ON/OFF, Silver

Dimension drawings:

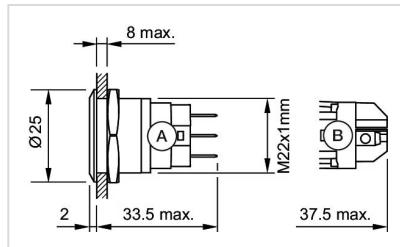


A = Solder terminal
B = Screw terminal

Mounting cut-outs:

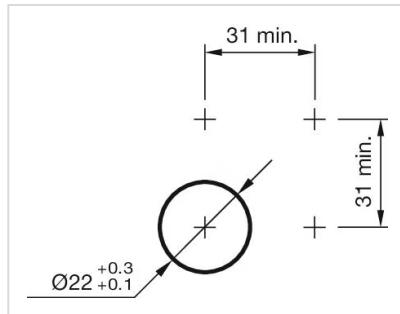

Wiring diagrams:

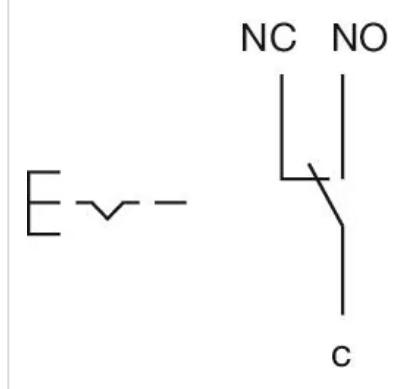

Component layouts:

