

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0901362103

Status:


Active

Overview:

C-Grid III Interconnects

Description:

C-Grid III Header, Single Row, Right-Angle, Shrouded, 3 Circuits, 4µm Tin/Lead (Sn) over Nickel (Ni)

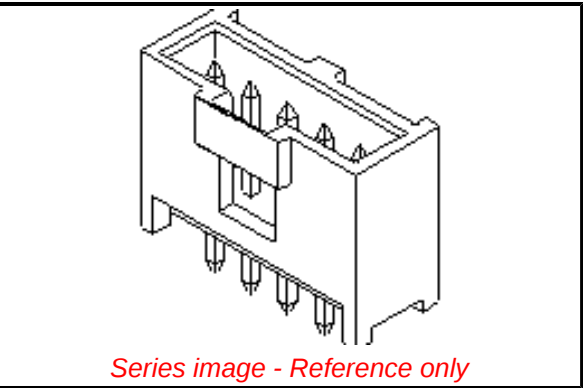

Documents:

[3D Model](#)

[3D Model \(PDF\)](#)

[Drawing \(PDF\)](#)

[Product Specification PS-99020-0001-001 \(PDF\)](#)

[Application Specification 901190001-AS-000 \(PDF\)](#)

[Packaging Specification PK-90136-001-001 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	90136
Application	Signal, Wire-to-Board
Component Type	PCB Header
Overview	C-Grid III Interconnects
Product Name	C-Grid III
Taxonomy	PCB Headers and Receptacles
UPC	800753669338
Physical	
Breakaway	No
Circuits (Loaded)	3
Circuits (maximum)	3
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	0.686/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	2.90mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	3.048µm
Plating min - Termination	3.048µm
Polarized to PCB	No
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-55° to +125°C

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -

D(2022)4187-DC (10

June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit

Contact US

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

90136 Series

Mates With

C-Grid III Modular Crimp Housing 90123 . C-Grid III Crimp Housing 90156

Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	3.0A
Voltage - Maximum	350V AC/DC
Solder Process Data	
Lead-freeProcess Capability	WAVE
Material Info	
Reference - Drawing Numbers	
Application Specification	901190001-AS-000
Packaging Specification	PK-90136-001-001
Product Specification	PS-99020-0001-001
Sales Drawing	SDA-90136-001

This document was generated on 01/05/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION