

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0955405880

Status:


Active

Overview:

Magnetic and Modular Jacks/Plugs

Description:

Modular Jack, Right-Angle, Surface Mount, 8/8, Int. Shielded, Low Profile, 1.34mm Side Solder Tabs, Reel

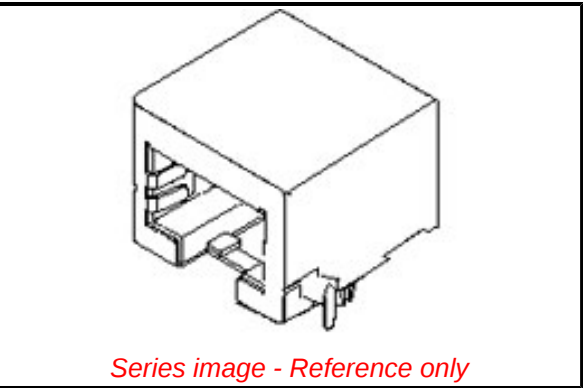

Documents:	
3D Model	Application Specification AS-85513-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-85502-001 (PDF)
3D Model (PDF)	Datasheet (PDF)
Product Specification PS-95540-002-001 (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	Modular Jacks/Plugs
Series	95540
Comments	Reflow Capable, Internal Shield
Component Type	PCB Jack
Magnetic	No
Overview	Magnetic and Modular Jacks/Plugs
Performance Category	3
Power over Ethernet (PoE)	N/A
Product Name	Modular Jack 8/8, RJ45
Taxonomy	Modular Jacks and Plugs
UPC	889056518628
Physical	
Boot Color	N/A
Color - Resin	Black
Durability (mating cycles max)	2500
Inverted / Top Latch	No
Jack Height	11.50mm
Lightpipes/LEDs	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold over Palladium Nickel
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	2.170/g
Orientation	Right Angle (Side Entry)
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.02mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.051µm, 0.600µm
Plating min - Termination	1.905µm
Port Configuration	1x1
Positions / Loaded Contacts	8/8
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No
Wire/Cable Type	N/A
Electrical	
Current - Maximum per Contact	1.5A
Grounding to PCB	Yes

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2022)4187-DC (10 June 2022)	
Halogen-Free	
Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

95540 Series

Mates With

95043 Modular Plug, Short Body

Shielded
Voltage - Maximum

Yes
125V DC

Material Info

Reference - Drawing Numbers

Application Specification
Packaging Specification
Product Specification
Sales Drawing

AS-85513-001-001
PK-85502-001
PS-95540-002-001
SD-95540-001-001

This document was generated on 11/17/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION