

# Product data sheet

## Automation technology - Data transmission




|                     |                                                                |
|---------------------|----------------------------------------------------------------|
| Product description | M12 Female angled connector, 4.0-6.0 mm, screw clamp, IP67, UL |
| -                   | -                                                              |
| Area                | M12-B series 715                                               |
| Part no.            | 99 0436 05 05                                                  |


### Illustration



### Scale drawing



### Contact arrangement (Plug-in side)



You can find the component part drawing and assembly instructions on the next page.

## Technical data

### General features

|                           |                         |
|---------------------------|-------------------------|
| Part no.                  | 99 0436 05 05           |
| Connector design          | Female angled connector |
| Type standard             | DIN EN 61076-2-101      |
| Version                   | Connector socket angled |
| Connector locking system  | screw                   |
| Termination               | screw clamp             |
| Degree of protection      | IP67                    |
| Cable outlet              | 4.0-6.0 mm              |
| Twistability              | 90° (4 coding options)  |
| Temperature range from/to | -40 °C / 85 °C          |
| Mechanical operation      | > 500 Mating cycles     |
| Weight (g)                | 14.20                   |
| Customs tariff number     | 85369010                |
| Country of Origin         | DE                      |

### Electrical parameters

|                           |        |
|---------------------------|--------|
| Rated voltage             | 60 V   |
| Rated impulse voltage     | 1500 V |
| Rated current             | 4.0 A  |
| Pollution degree          | 3      |
| Overvoltage category      | II     |
| Insulating material group | III    |

Product data sheet

Automation technology - Data transmission



|                     |                                                                |
|---------------------|----------------------------------------------------------------|
| Product description | M12 Female angled connector, 4.0-6.0 mm, screw clamp, IP67, UL |
| -                   | -                                                              |
| Area                | M12-B series 715                                               |
| Part no.            | 99 0436 05 05                                                  |

Material

|                       |                                                              |
|-----------------------|--------------------------------------------------------------|
| Housing material      | PA                                                           |
| Contact body material | PA                                                           |
| Contact material      | CuZn (brass)                                                 |
| Contact plating       | CuSnZn (Optalloy)                                            |
| REACH SVHC            | CAS 96-45-7 (Imidazolidine-2-thione)<br>CAS 7439-92-1 (Lead) |
| SCIP number           | 3173c705-1e3e-4902-aacf-09d70f3e6926                         |

Authorization/approvals

|           |    |
|-----------|----|
| Approvals | UL |
|-----------|----|

Classifications


|          |          |
|----------|----------|
| ETIM 9.0 | EC002635 |
|----------|----------|

## Product data sheet

### Automation technology - Data transmission

|                     |                                                                |
|---------------------|----------------------------------------------------------------|
| Product description | M12 Female angled connector, 4.0-6.0 mm, screw clamp, IP67, UL |
| -                   | -                                                              |
| Area                | M12-B series 715                                               |
| Part no.            | 99 0436 05 05                                                  |

### Assembly instructions

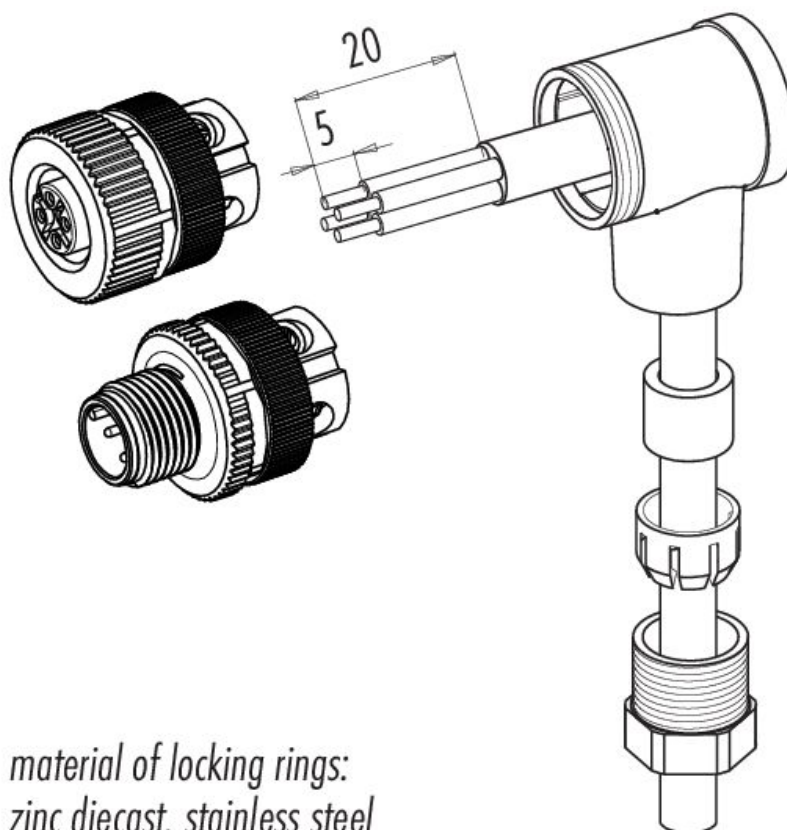


# Product data sheet

## Automation technology - Data transmission

|                     |                                                                |
|---------------------|----------------------------------------------------------------|
| Product description | M12 Female angled connector, 4.0-6.0 mm, screw clamp, IP67, UL |
| -                   | -                                                              |
| Area                | M12-B series 715                                               |
| Part no.            | 99 0436 05 05                                                  |

### Component part drawing

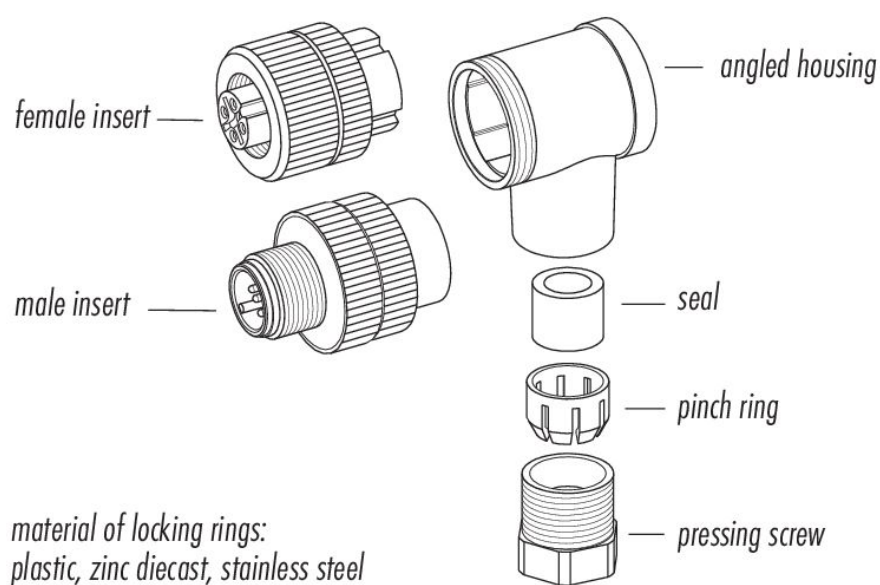

|                     |                                                                       |
|---------------------|-----------------------------------------------------------------------|
| Product description | <b>M12 Female angled connector, 4.0-6.0 mm, screw clamp, IP67, UL</b> |
| -                   | -                                                                     |
| Area                | <b>M12-B series 715</b>                                               |
| Part no.            | <b>99 0436 05 05</b>                                                  |

## General Disclaim Notice

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

The plug connector is not suitable for mains voltages Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 60 cNm).

The user must take appropriate safety precautions to ensure that the connector cannot be accidentally disconnected. In addition, the user must ensure that the cable is suitably secured.