




Rating		50A 12VDC				Mounting Hole 	Circuit Diagram 
Contact Resistance		50m ohm Max.					
Insulation Resistance		DC 500V 100M ohm Min.					
Dielectric Strength		AC 1500V 1 minute					
Operation Temperature		-25°C~85°C					
Switch Function		3P SPST (ON)-OFF (LED dependent)					
		Thickness:9.0mm max.					
LED Color	LED Lens Color	VF	IF	View Angle	Mcd		
Blue	White diffuse	3.5V	20mA	100°	300		

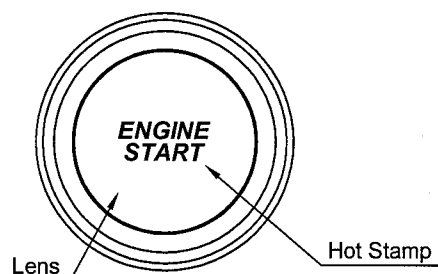

MATERIAL:

Frame: Nylon 66 (94V-2), Black

Cover: ABS (94HB)



Terminals: Brass Alloy

Contacts: Copper Alloy+AgSnO₂InO₃

LED: $\phi 5.0$ White diffused

Actuator: PC (94V-2), Blue

Hot stamping: White

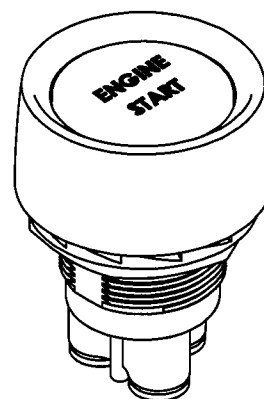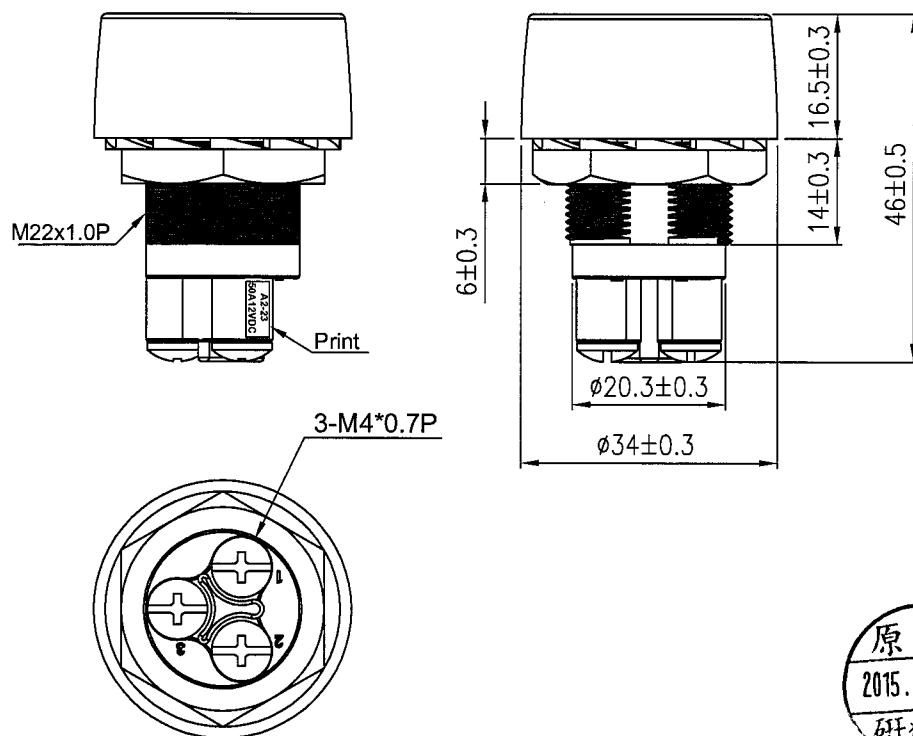

						△	
						△	
Date	Name	Description				NO	
Drawn	Checked	Approved	SCI BOM NO.	1110063	Model Name	PUSH SWITCH	
曹盈芳	曹盈芳	王明	Customer No.		Model No.	A2-23B-07	Rev.
09/29/14	9/29/14	10/6/14	Unit	mm	Shin Chin Industrial Co., Ltd.		0