


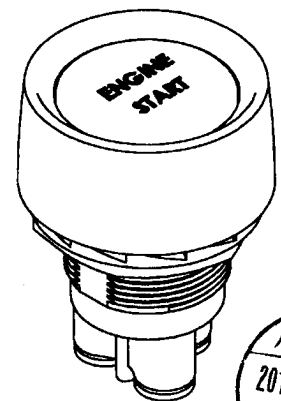

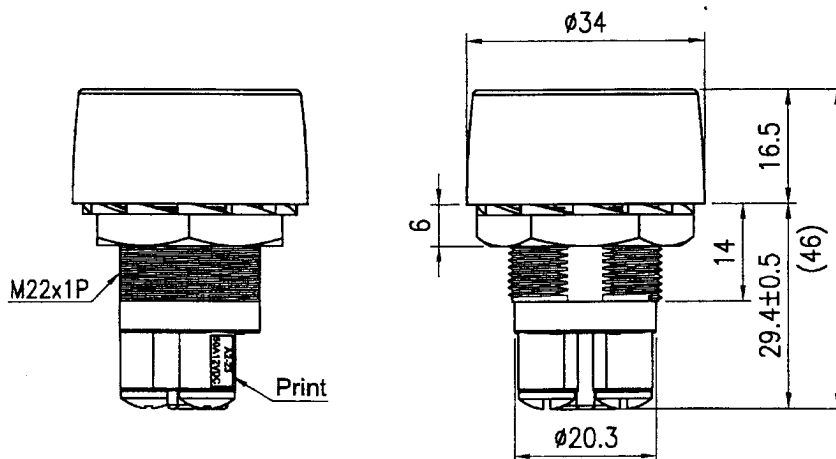
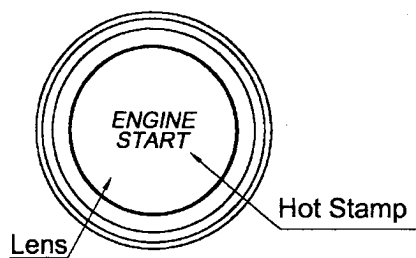


Rating		50A 12V DC				Mounting Hole		
Contact Resistance		50m ohm Max.						
Insulation Resistance		DC 500V 100M ohm Min.						
Dielectric Strength		AC 1500V 1 minute						
Operation Temperature		-25°C~85°C						
Switch Function		3P SPST OFF-(ON)						
LED Color		LED Lens Color		VF	IF	View Angle	Mcd	Circuit Diagram
Green		Green diffuse		3.5V	30mA	100°	600	

MATERIAL:

Frame: Black, Nylon#66
Cover: Chromeplate, ABS
Terminals: Brass Alloy
LED: $\phi 5.0$ Green diffused
Cover lamp: Green, PC



Tolerances ± 0.3 Unless Otherwise Specified

						△	
						△	
Date	Name	Description				No.	
Drawn	Checked	Approved	SCI BOM No	1110062	Model Name	PUSH SWITCH	
黃洋	4/15/15	4/15/15	Customer No		Model No.	A2-23B-07	Rev.
4/1/15	4/15/15	4/15/15	Unit	mm	Shin Chin Industrial Co., Ltd.		0