

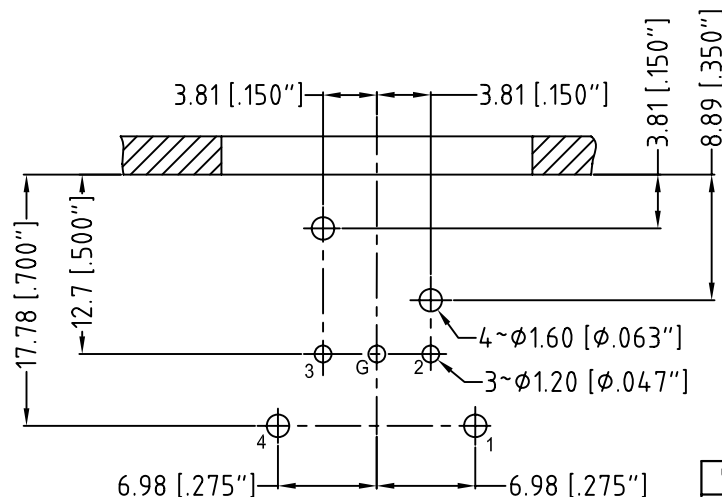
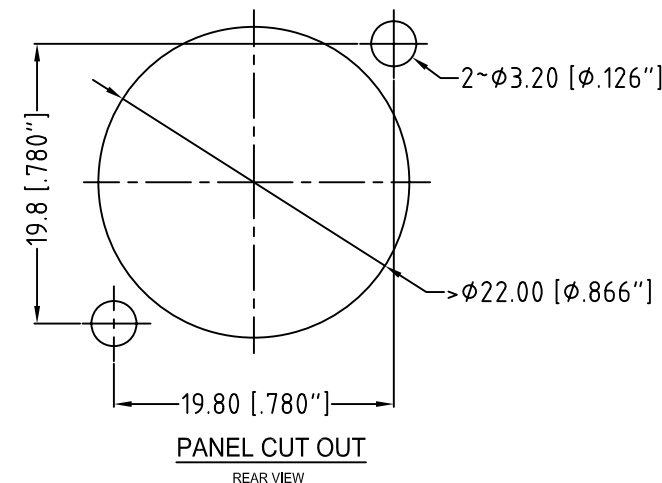


LEGEND  = KEY PRODUCT CHARACTERISTICS

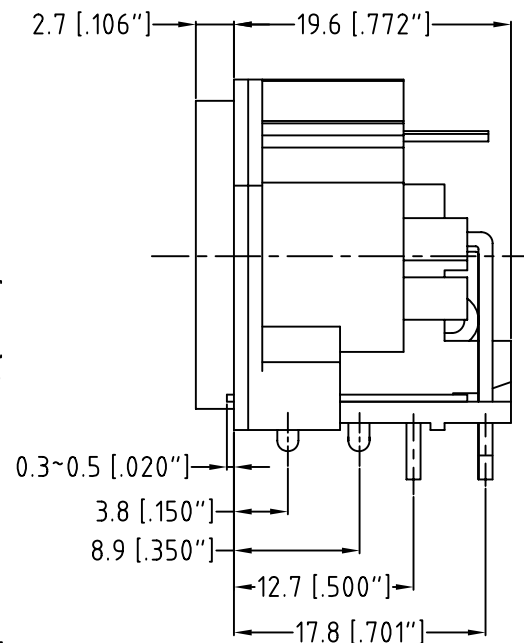


REVISION HISTORY

REV	DESCRIPTION	DATE	BY	CHG/No
0	FIRST ISSUED	24-07-13	M.H	---
1	ADD -B TO PN	26-08-15	M.H	---

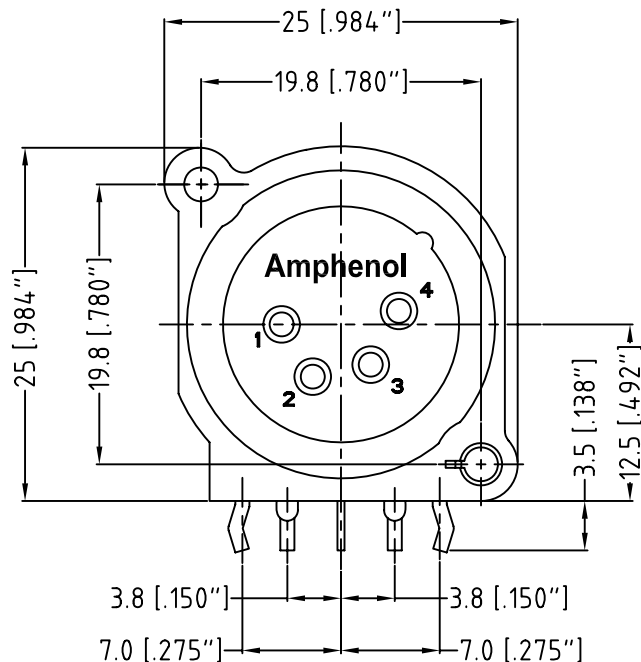

Specifications:
Rating : AC 50V, 3A.
Mating Force: 10-30N.
Contact resistance: <30mΩ.
Insulation resistance: >1GΩ on DC 500V
Voltage withstand: AC 1000V for 1 minute.

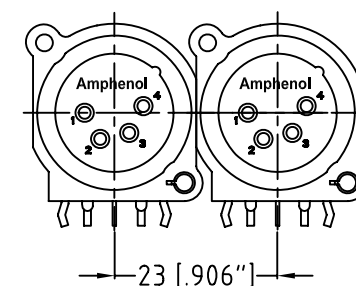

(SCALE 1:2)

PCB-LAYOUT
COMPONENT SIDE
TOLERANCE:±0.05mm[.002"]

UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE		THIS DOCUMENT IS THE PROPERTY OF AMPHENOL AUSTRALIA PTY. LTD. . NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER				Amphenol Amphenol Australia Pty.Ltd, 22 Industry Blvd, Carrum Downs, VIC 3201	
LINEAR	ANGULAR	MATERIAL: REFER TO COMPONENTS		DRN: MH	DATE: 24-07-13	TITLE: AC4MAH-AU-B HORIZONTAL MALE CUSTOMER DRAWING	
X ±0.50	X' ±1	DO NOT SCALE		CKD: MH	DATE: 25-08-15	PART No: AC4MAH-AU-B	
X.X ±0.20	X.X' ±30°	FINISH: REFER TO COMPONENTS		APP'D: PM		DRAWING NO. 55010922-000-1	
X.XX ±0.10	X.XX' ±15°	DIMENSIONS IN MILLIMETRES		SCALE: 1:1		SHEET 1/1	
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS		THIRD ANGLE PROJECTION		SIZE: A4		CAD FILE: 55010922000110	