

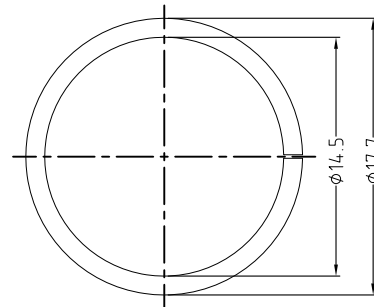
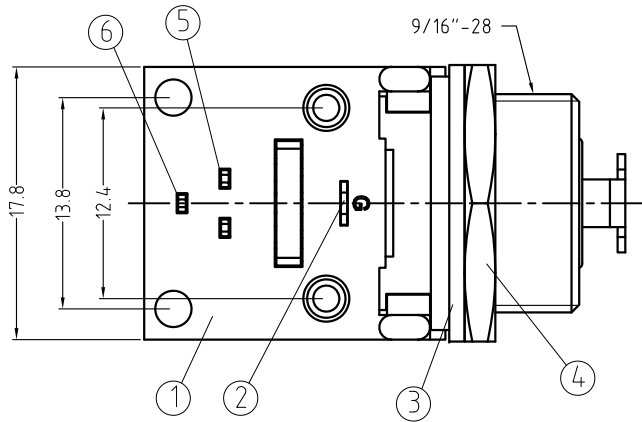
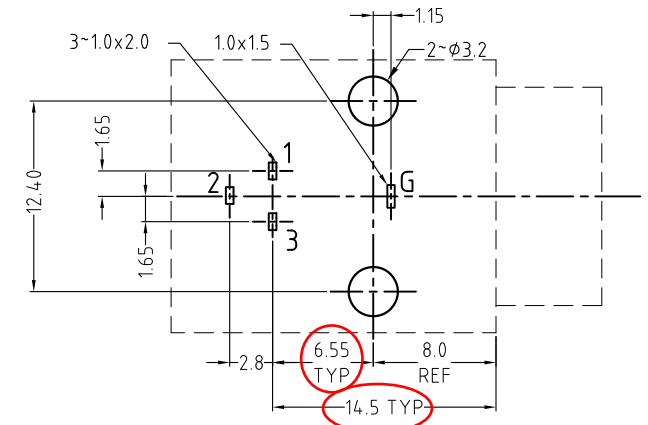
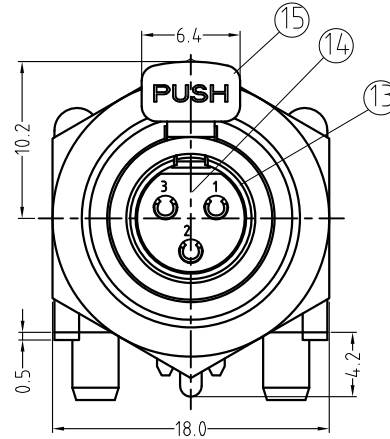


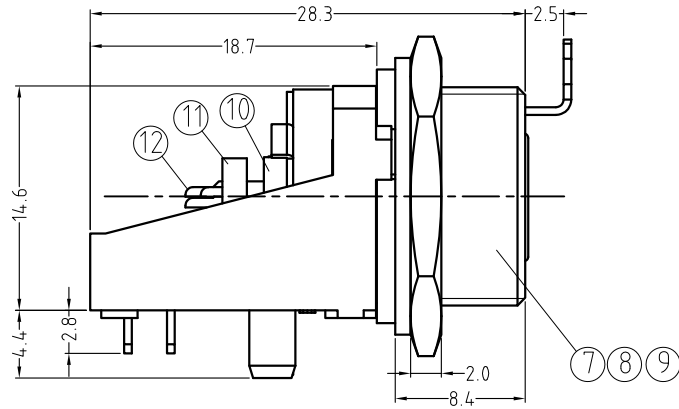

SPRING WASHER
PN: 50300332-321

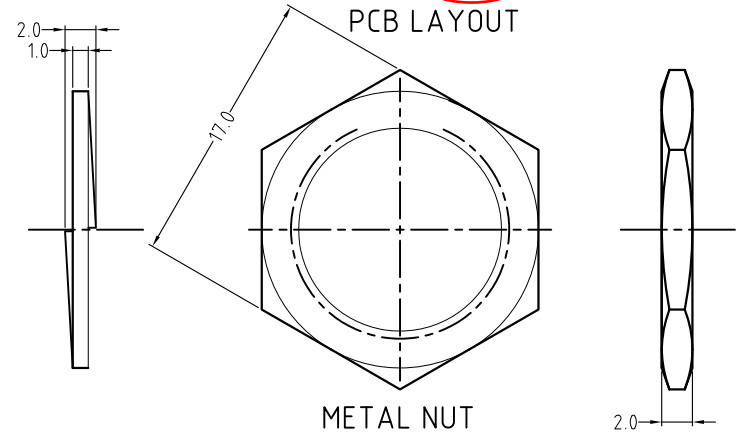


METAL NUT
PN: 50300395-321

Notes:

- Part must conform to RoHS compliance
- Plastic parts conform to UL94 V-0 compliant.

Specification:

Electrical	Mechanical
Contact Resistance: <0.03 ohm	Mating: >5000 cycles
Insulation Resistance: >500Megaohm	Insertion/withdrawal Force: >10N & <30N.
Dielectric Strength: 1000VDC	
Rated Current: 5A	



ISO VIEW
(SCALE 1:1)

UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE		THIS DOCUMENT IS THE PROPERTY OF AMPHENOL AUSTRALIA PTY. LTD.. NO PART THEREOF MAY BE REPRODUCED AND USED WITHOUT THE PRIOR WRITTEN CONSENT OF THE OWNER			
LINEAR	ANGULAR				
X ± 0.50	X° ± 1°				
X,X ± 0.25	X°X' ± 30'				
X,X ± 0.10	X°X'X" ± 15"				
BREAK ALL SHARP EDGES AND REMOVE ALL BURRS					
DO NOT SCALE					
DIMENSIONS IN MILLIMETRES					

2	CORRECT DIM 7.75mm TO 6.55mm & 15.5mm TO 14.5mm	M.H	12-05-16	9346
1	CORRECT CONTACT ID NUMBER SWAPPED 2 & 3 LOCATION	M.H	15-03-16	----
0	FIRST ISSUE	MH	04-10-12	----
REV.	CHANGE DETAILS	BY	DATE	CHG/No

TITLE:		Amphenol	
MINI XLR 3 SKT FEMALE			
PANEL MOUNT RA PCB			
CUSTOMER DRAWING		22 Industry Boulevard, Carrum Downs, Vic 3201	
		DRAWING NO.	SHEET
AG3FCCH		55010859-000-1	1 OF 1
SIZE: A4			

15	PUSH LEVEL	Brass/Ni Plated	1
14	INSULATOR	PPS/Black	1
13	METAL SHELL	Brass/Ni Plated	1
12	SOCKET CONTACTS	Brass/Au Plated	4
11	CIRCUIT BOARD	FIBER GRASS	1
10	INSULATOR	PPS/Black	1
9	SPRING	SUS 304/Ni Plated	1
8	LATCH SPRING	SUS 304/Ni Plated	1
7	MACHINED SHELL	Brass/Ni Plated	1
6	CONTACTS	Brass/Au Plated	2
5	CONTACTS	Brass/Au Plated	2
4	METAL NUT	Brass/Ni Plated	1
3	SPRING WASHER	SUS 304/Ni Plated	1
2	GROUND CONTACT	Brass/Ni Plated	1
1	SUPPORT	PA6/Black	1
DESCRIPTION		MATERIAL & FINISH	QTY