

Type BLR-I-606

Fuse Block - Indicating

6 Pole – Regular Auto Blade



www.optifuse.com

(619) 593-5050

Specifications:

Fuse Type: Regular Auto Blade – APR, ANR Series

Max Current Rating: 30A per Circuit - 100A Max Input

Max Voltage: 32VDC

IP Rating: 40

Material:

Base: PBT

Terminals: Copper, tin plated

0.250" [6.3mm] Quick Connect Terminals



Cover: PC (Transparent)

Indicating LED – Red

Temperature Rating: -20° C ~ +85° C

Mounting: Two (2) 5 mm mounting holes for #10 screws

Mechanical Dimensions: Inches [mm]

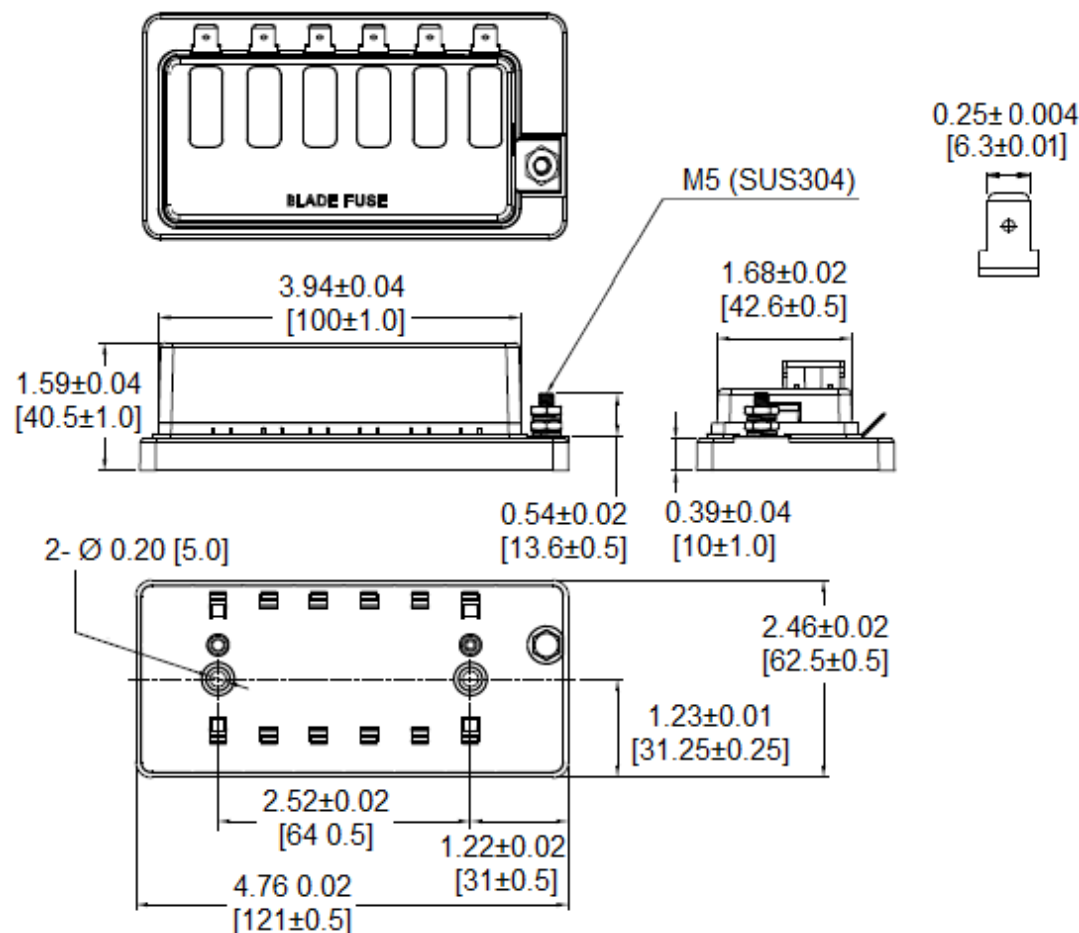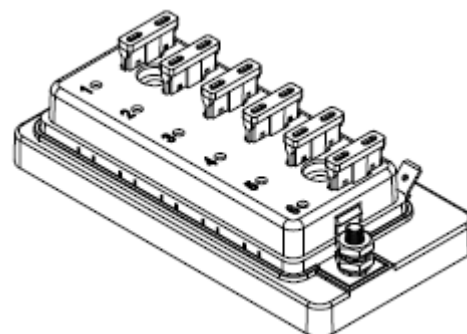

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev A 05/2018 - Page: 1/1
Code S02-01H