


Pozi flat countersunk head chipboard screws form Z, fully threaded

BN 20143

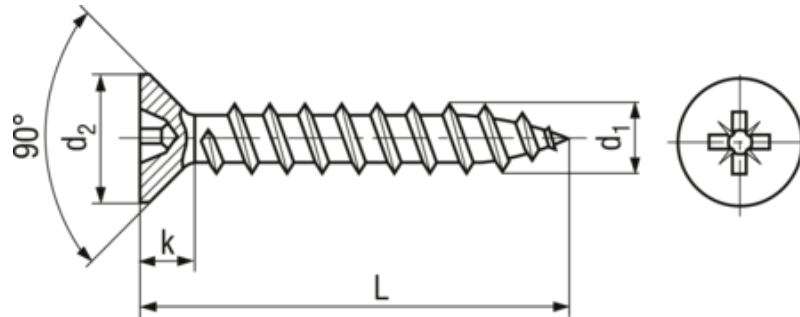

Headform	Countersunk
Drive	Cross recess Z (Pozidriv)
Thread	fully threaded
Material	Steel
Material execution	case-hardened
Surface	zinc plated blue
Warnings	ISO 4042 Quenched and tempered fasteners ≥ 360 HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement! Further notice to residual risks can be found in the introduction section.

partially threaded version over 70 mm at manufacturer's option

Article no	d1	L	d2	k	Pozidriv
8159564	2.5	12	5	1.4	1
8159505	3	12	6	2	1
8159483	3	16	6	2	1
8159432	3	20	6	2	1
8159440	3	25	6	2	1
8159459	3	30	6	2	1
8159467	3	35	6	2	1
8159475	3.5	12	7	2.3	2
8159424	3.5	16	7	2.3	2
8159351	3.5	20	7	2.3	2
8159378	3.5	25	7	2.3	2
8159386	3.5	30	7	2.3	2

Article no	d1	L	d2	k	Pozidriv
8159394	3.5	35	7	2.3	2
8159343	4	16	8	2.6	2
8159270	4	20	8	2.6	2
8159289	4	25	8	2.6	2
8159297	4	30	8	2.6	2
8159300	4	35	8	2.6	2
8159319	4	40	8	2.6	2
8159327	4	45	8	2.6	2
8159335	4	50	8	2.6	2
8159025	4.5	30	9	3	2
8159033	4.5	35	9	3	2
8159041	4.5	40	9	3	2
8159076	4.5	50	9	3	2
8159092	5	20	10	3.2	2
8159106	5	25	10	3.2	2
8159114	5	30	10	3.2	2
8159122	5	35	10	3.2	2
8159130	5	40	10	3.2	2
8159157	5	50	10	3.2	2
8159165	5	55	10	3.2	2
8159173	5	60	10	3.2	2
3223315	6	30	12	3.8	3