




Panduit®

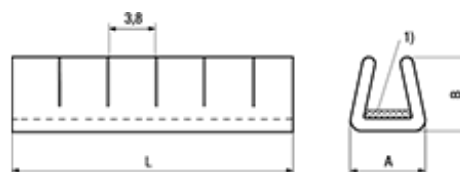

1) Adhesive

BN 20304**Grommet edging slotted wall**

for cable run with adhesive

weather resistant

Polyethylene

black

- Operating temperature range: -40 °C – +50 °C
- Material flammability rating: UL HB

Article#	A	B	Socket L	Panel thickness	Code
3382797	3,3	4,1	30,5 m	0,9-1,5	GEE62F-A-C0
3382798	4,3	4,7	30,5 m	1,6-2,4	GEE99F-A-C0
3382800	5,4	5,6	30,5 m	2,5-3,7	GEE144F-A-C0