


Hexalobular (6 Lobe) socket cheese head frame screws

BN 20930

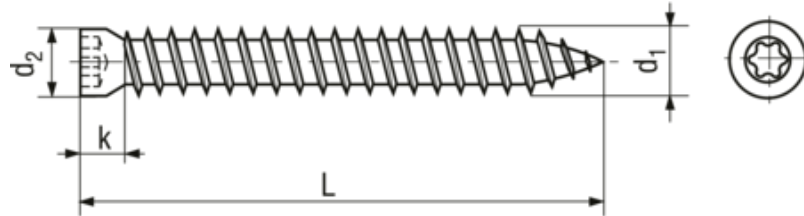

Headform	Cylindrical
Drive	Hexalobular socket
Thread	fully threaded
Material	Steel
Material execution	case-hardened
Surface	zinc plated blue, added lubricant
Warnings	ISO 4042 Quenched and tempered fasteners ≥ 360 HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement! Further notice to residual risks can be found in the introduction section.

Article no	d1	L	d2	k~	Hexalobular socket
9014615	7.5	40	8.3	5.7	X30
9014617	7.5	60	8.3	5.7	X30
9014619	7.5	80	8.3	5.7	X30
9014626	7.5	100	8.3	5.7	X30
9014628	7.5	120	8.3	5.7	X30
9014630	7.5	140	8.3	5.7	X30
9014632	7.5	180	8.3	5.7	X30
9014634	7.5	240	8.3	5.7	X30
9014636	7.5	320	8.3	5.7	X30
9014616	7.5	50	8.3	5.7	X30
9014618	7.5	70	8.3	5.7	X30
9014625	7.5	90	8.3	5.7	X30
9014627	7.5	110	8.3	5.7	X30
9014629	7.5	130	8.3	5.7	X30

Article no	d1	L	d2	k~	Hexalobular socket
9014631	7.5	150	8.3	5.7	X30
9014633	7.5	210	8.3	5.7	X30
9014635	7.5	270	8.3	5.7	X30