




~DIN 7976 C

Standard withdrawn

~ISO 1479

Opel

450 HV

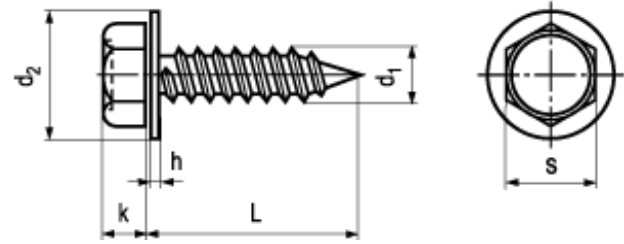

#### BN 30907

#### Hex head tapping screws

with cone end type C and captive washer

Steel case-hardened 450 HV

zinc plated blue



ISO 4042

Quenched and tempered fasteners  $\geq 360$  HV and tempered case-hardened fasteners with electroplated coatings: Susceptible to hydrogen embrittlement!

Further notice to residual risks can be found in the introduction section.

| Article# | d <sub>1</sub> | d <sub>2</sub> max. | k max. | h   | s  | L  |
|----------|----------------|---------------------|--------|-----|----|----|
| 5001609  | ST 6,3         | 18                  | 4,8    | 1,5 | 10 | 19 |