

## ESD spiral cord for bracelet length 2.4 m yellow



Item No. **9-341-2**

EPA suitable. For working in electrostatically protected areas (ESD workplace / ESD protection zone).

### Specification

highly elastic spiral cable  
2 x 1 megaohm safety resistance  
3 mm press button for wrist strap  
10 mm press button for ground connection

length 700 to 2400 mm  
weight 25 g

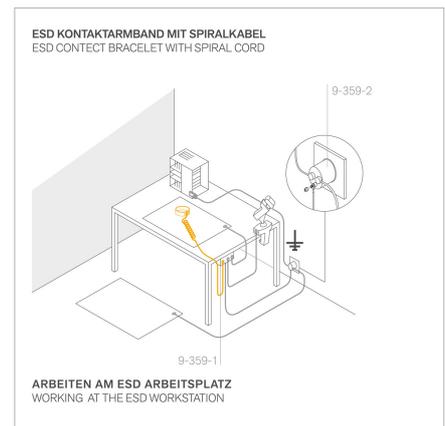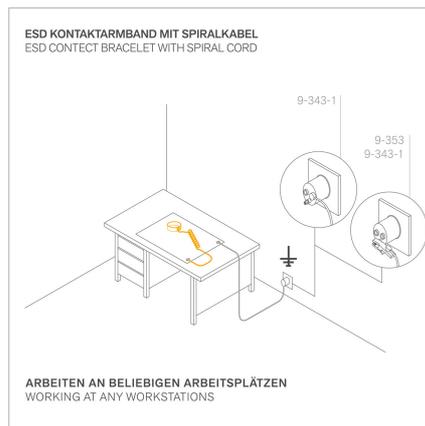

### Application and technology

The coiled cable has a safety resistance of 1 MOhm on each connection side and is approved for workplaces with a rated voltage up to 250 VAC.