


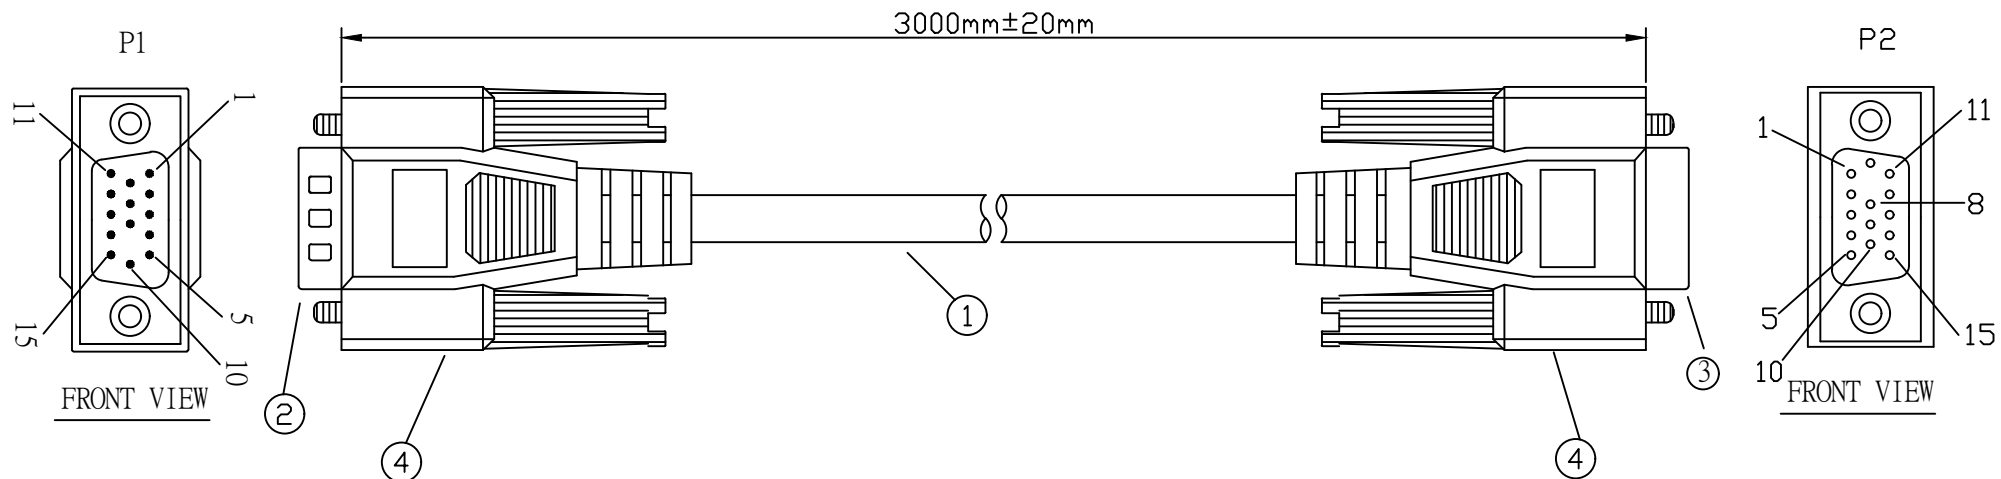

- 1.CABLE:NO UL 14C+1.<<28AWG,7/0.12mm±0.008>>14C
SHIELD:DRAIN WIRE+AL/MY COVERAGE
JACKET:PVC,COMPLIANCE ROHS,COLOR:BEIGE,Ø.D:6mm±0.2mm
- 2.CONNECTOR:2 PCS HDD15 PIN MALE SOLDER TYPE CONNECTOR
SHELL:NICKEL PLATED
- 3.CONNECTOR:2 PCS HDD15 PIN FEMALE SOLDER TYPE CONNECTOR
SHELL:NICKEL PLATED
- 4.HOOD:PVC MOLDED TYPE WITH AL-FOIL SHIELDED ON INNER
MOLD INJECTION OUTER MOLD WITH THUMB SCREW#4-40UNC
HOOD COLOR IS BEIGE,COMPLIANCE ROHS
- 5.Fulfill ROHS Guideline
- 6.ELECTRONIC TEST: 100% OPEN SHORT+MISS WIRE TEST

DRAWING

HDD15PIN PLUG(P1)	WIRE	HDD15PIN JACK(P2)
1	————	1
2	————	2
3	————	3
4	————	4
5	————	5
6	————	6
7	————	7
8	————	8
10	————	10
11	————	11
12	————	12
13	————	13
14	————	14
15	————	15
SHELL	D.W	SHELL

PART NO	C-15GW/3	SHEET NO	1	THIRD ANGLE PROJECTION	有得 限望 公股 份	NEWMAN, HOPE & CO.INC
TITLE:	HDD15 PIN PLUG TO HDD15 PIN JACK BEIGE COLOR,L:3M	SCALE	N.T.S	DRAWN BY & DATE		
		SIZE	A4	CHECKED BY & DATE		
		UNIT		APPROVED BY & DATE		
DWN NO	D-C-15GW/3	mm	INCH			

TEL:886-2-28765517 FAX:886-2-28765527
E-MAIL: sales@newmanhope.com.tw