

STRADA-2X2-VSM

IESNA Type V (square) beam for wide areas
lighting such as car parks


TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	6.1 mm
Fastening	screw, glue, pin
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	6.2 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
STRADA-2X2-VSM	Multi-lens	PMMA	clear

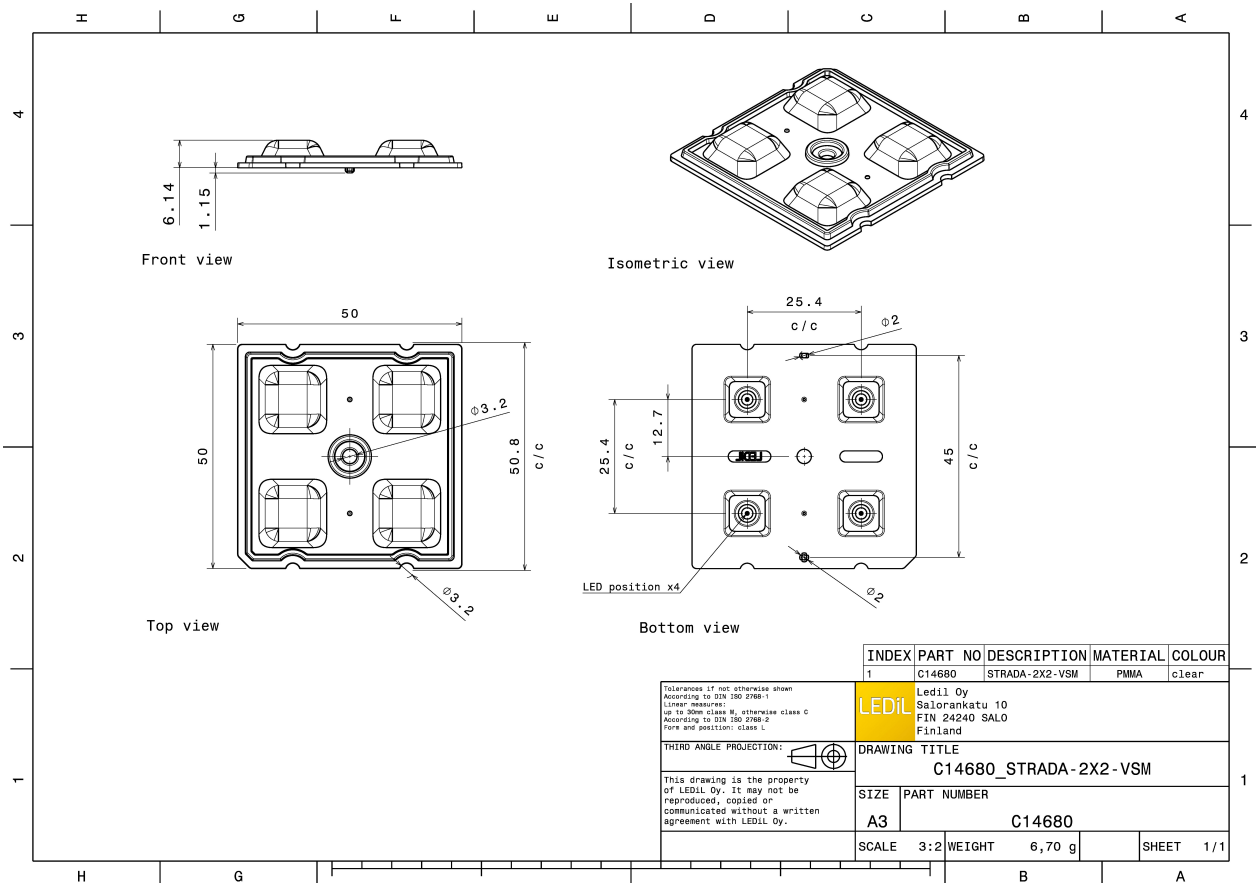


PHOTOMETRIC DATA (MEASURED):




LED Bridgelux SMD 5050
 FWHM 149.0°
 Efficiency 94 %
 Peak intensity 0.340 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

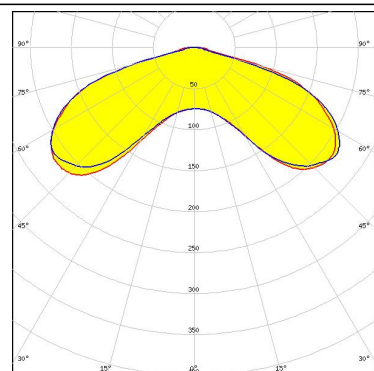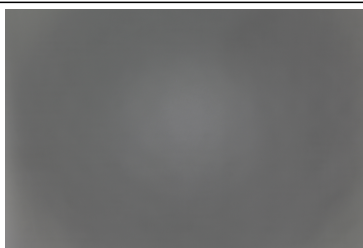


LED QUICK FLUX XTP 2x4 xxx LS G5
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.480 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

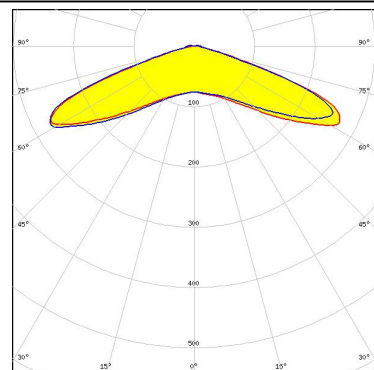

LED QUICK FLUX XTP 2x6 xxx LS G5
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.480 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

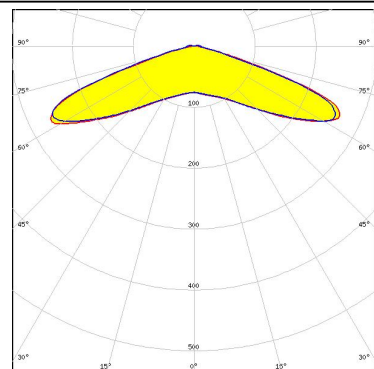


LED QUICK FLUX XTP 2x8 xxx LS G5
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

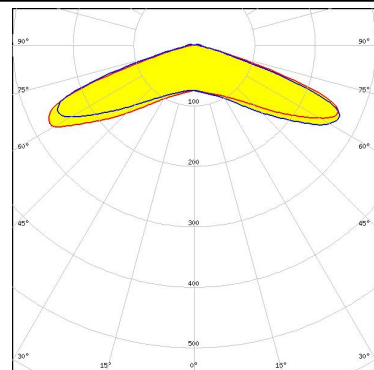


PHOTOMETRIC DATA (MEASURED):




LED XD16
FWHM 149.0°
Efficiency 94 %
Peak intensity 0.410 cd/lm
LEDs/each optic 4
Light colour White
Required components:

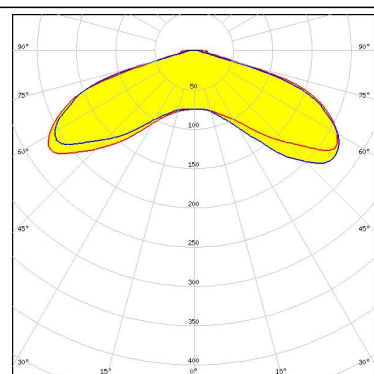


LED XD16
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.630 cd/lm
LEDs/each optic 1
Light colour White
Required components:

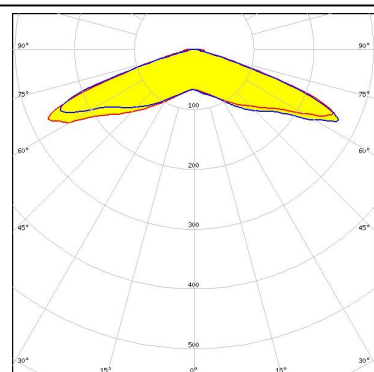

LED XHP35 HD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.370 cd/lm
LEDs/each optic 1
Light colour White
Required components:

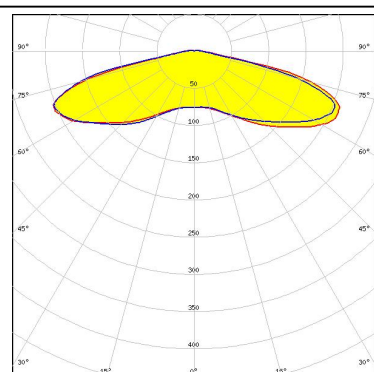


LED XT-E
FWHM 152.0°
Efficiency 94 %
Peak intensity 0.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

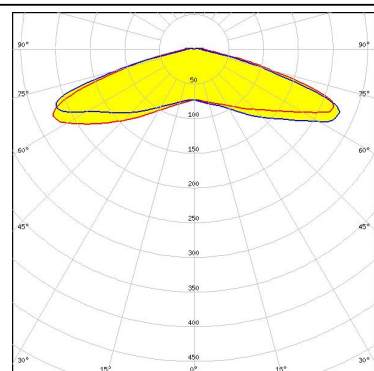

PHOTOMETRIC DATA (MEASURED):



LG Innotek

LED H35C1 (LEMWA33)
 FWHM 150.0°
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

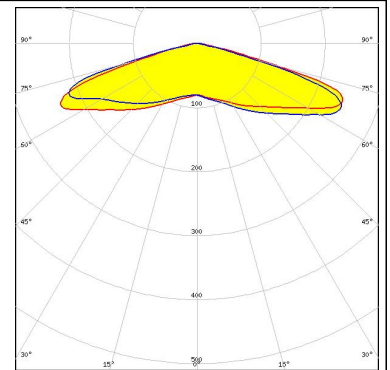


LUMILEDS

LED LUXEON 5050
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.360 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

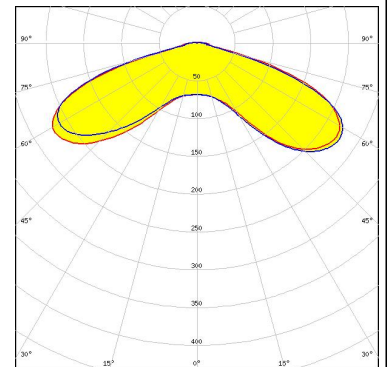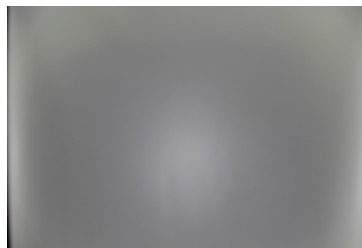


LUMILEDS

LED LUXEON C
 FWHM Asymmetric
 Efficiency 95 %
 Peak intensity 0.580 cd/lm
 LEDs/each optic 1
 Light colour PC Amber
 Required components:

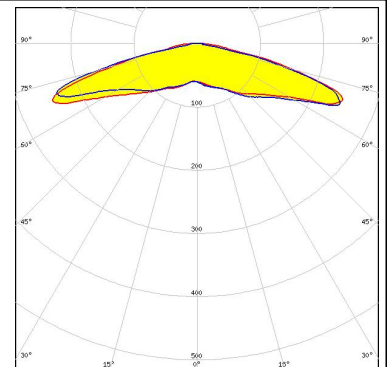

LUMILEDS


LED LUXEON V
 FWHM 151.0°
 Efficiency 94 %
 Peak intensity 0.420 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

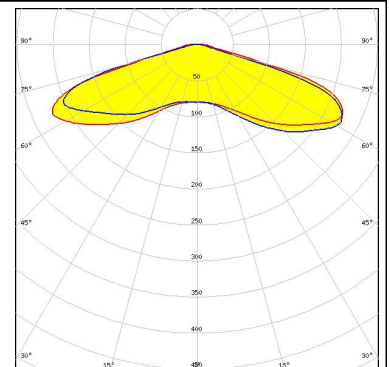


PHOTOMETRIC DATA (MEASURED):




LED LUXEON V2
FWHM 147.0°
Efficiency 94 %
Peak intensity 0.520 cd/lm
LEDs/each optic 1
Light colour White
Required components:

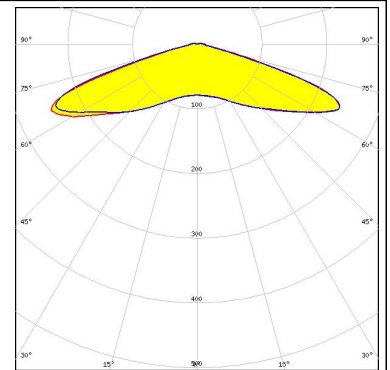


LED NVSW219D
FWHM 152.0°
Efficiency 94 %
Peak intensity 0.440 cd/lm
LEDs/each optic 1
Light colour White
Required components:

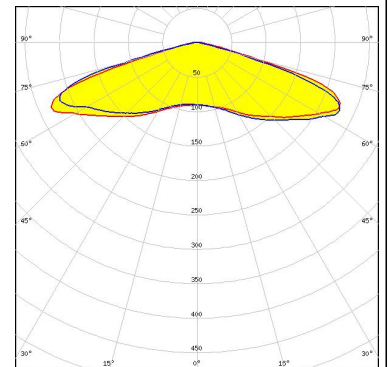

LED NVSW319B
FWHM 156.0°
Efficiency 94 %
Peak intensity 0.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

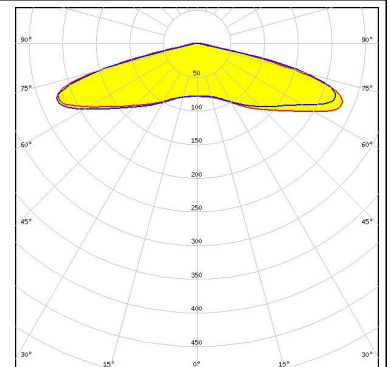


LED NVSW3x9A
FWHM 152.0°
Efficiency 94 %
Peak intensity 0.470 cd/lm
LEDs/each optic 1
Light colour White
Required components:

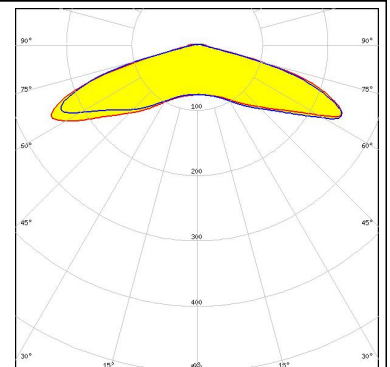


PHOTOMETRIC DATA (MEASURED):




LED NVSxE21A
 FWHM 134.0°
 Efficiency 94 %
 Peak intensity 0.690 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

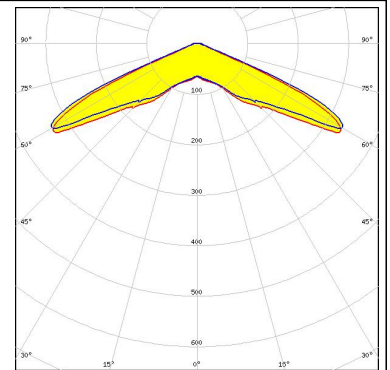


LED Duris S8
 FWHM 150.0°
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

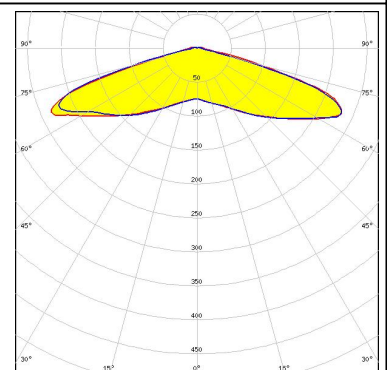

LED Oslon Square Gen3
 FWHM 148.0°
 Efficiency 94 %
 Peak intensity 0.540 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

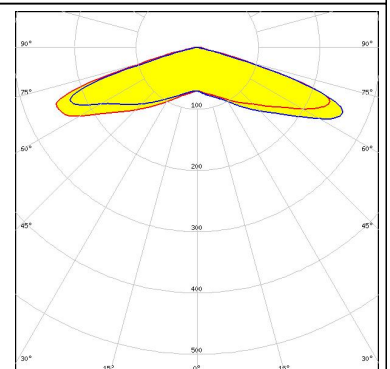


LED Oslon Square PC
 FWHM 143.0°
 Efficiency 94 %
 Peak intensity 0.510 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

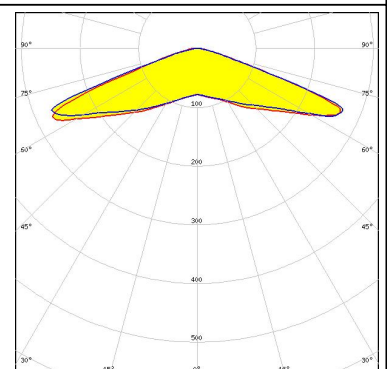

PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4
 FWHM 146.0°
 Efficiency 94 %
 Peak intensity 0.510 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

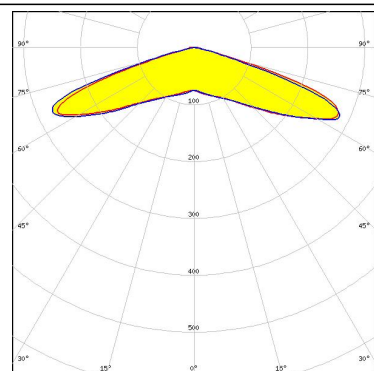


SAMSUNG

LED HiLOM RH16 (LH351C)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.470 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

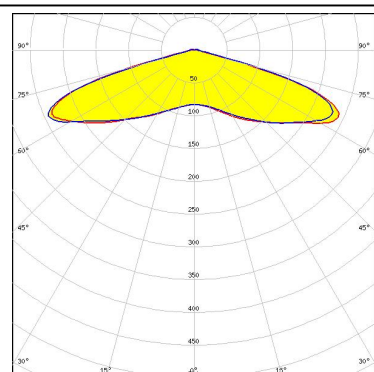


SAMSUNG

LED LH351B
 FWHM 153.0°
 Efficiency 94 %
 Peak intensity 0.450 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

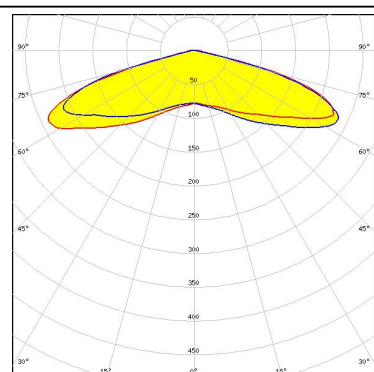

SAMSUNG


LED LH351C
 FWHM 149.0°
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

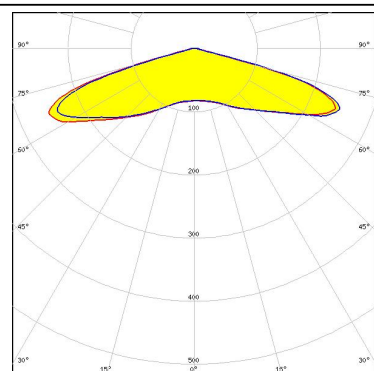

PHOTOMETRIC DATA (MEASURED):


SAMSUNG

LED LH351D
FWHM 156.0°
Efficiency 94 %
Peak intensity 0.370 cd/lm
LEDs/each optic 1
Light colour White
Required components:

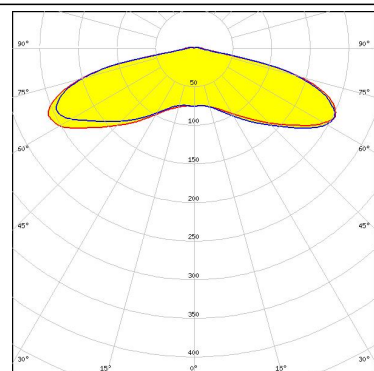



SAMSUNG

LED LH508A
FWHM 146.0°
Efficiency 94 %
Peak intensity 0.360 cd/lm
LEDs/each optic 1
Light colour White
Required components:

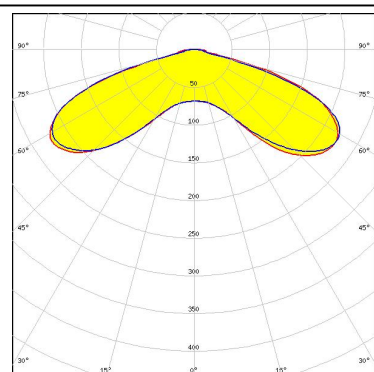


SEOUL SEMICONDUCTOR

LED Z8Y22
FWHM 141.0°
Efficiency 94 %
Peak intensity 0.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

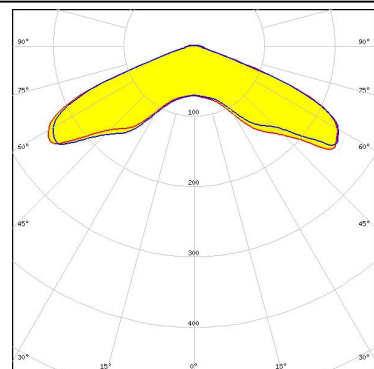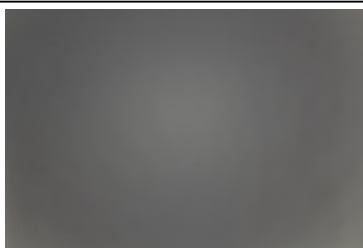

SEOUL SEMICONDUCTOR

LED Z8Y22P
FWHM 146.0°
Efficiency 94 %
Peak intensity 0.490 cd/lm
LEDs/each optic 1
Light colour White
Required components:

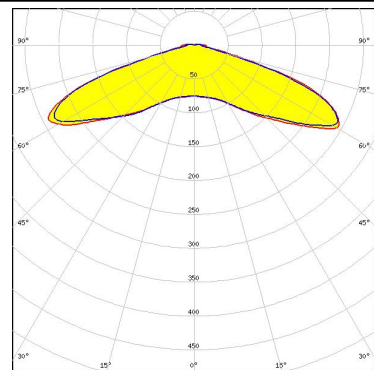


PHOTOMETRIC DATA (MEASURED):

TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:


TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:

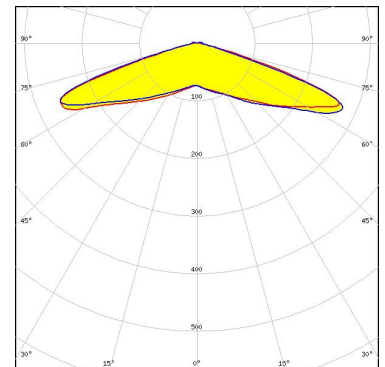


TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD
FWHM 139.0°
Efficiency 94 %
Peak intensity 0.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

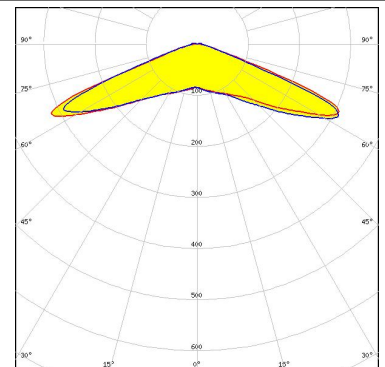

TRIDONIC


LED RLE G1 49x133mm 2000lm xxx EXC OTD
FWHM 139.0°
Efficiency 94 %
Peak intensity 0.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

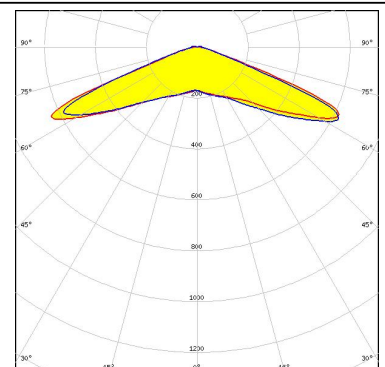

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD
FWHM 139.0°
Efficiency 94 %
Peak intensity 0.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

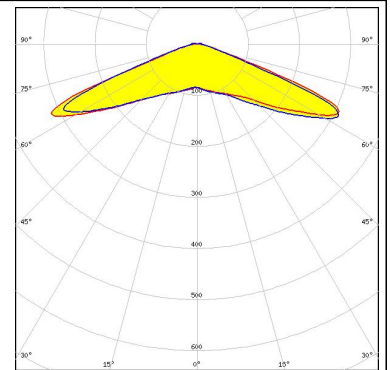

TRIDONIC


LED RLE G1 49x245mm 4000lm xxx EXC OTD
FWHM 139.0°
Efficiency 94 %
Peak intensity 0.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

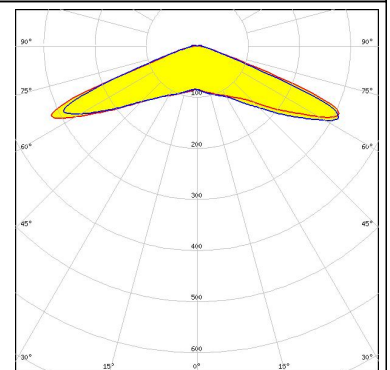


PHOTOMETRIC DATA (SIMULATED):




LED XP-G2
FWHM 150.0°
Efficiency 93 %
Peak intensity 0.430 cd/lm
LEDs/each optic 1
Light colour White
Required components:

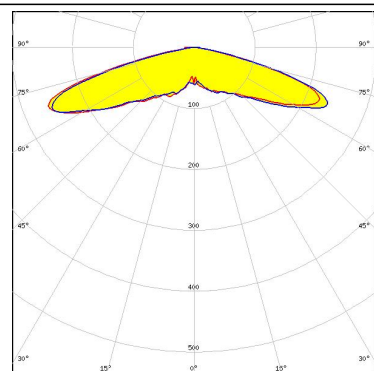


LED XP-L2
FWHM 151.0°
Efficiency 94 %
Peak intensity 0.350 cd/lm
LEDs/each optic 1
Light colour White
Required components:

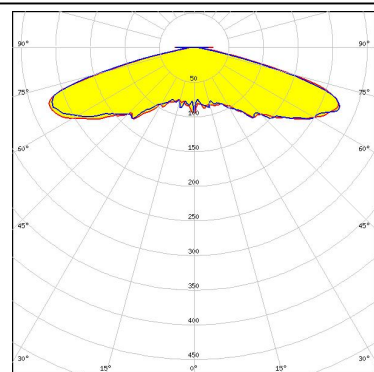

LED LUXEON MZ
FWHM 146.0°
Efficiency 94 %
Peak intensity 0.410 cd/lm
LEDs/each optic 1
Light colour White
Required components:

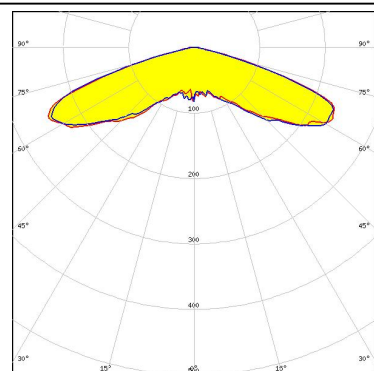


LED NVSxx19B/NVSxx19C
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.450 cd/lm
LEDs/each optic 1
Light colour White
Required components:

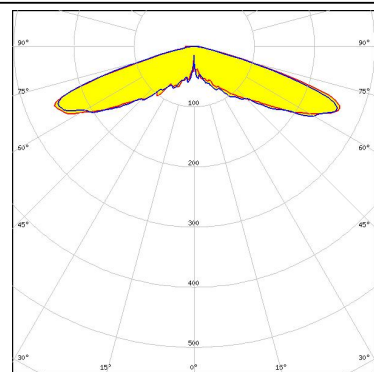

PHOTOMETRIC DATA (SIMULATED):

OSRAM


LED PrevaLED Brick DC 2x8
 FWHM 146.0°
 Efficiency 93 %
 Peak intensity 1.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

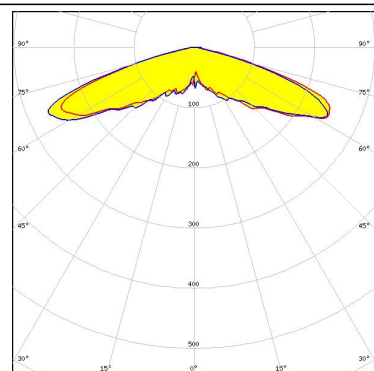

OSRAM

Opto Semiconductors


LED OSCONIQ P 3737 (2W version)
 FWHM 144.0°
 Efficiency 93 %
 Peak intensity 0.440 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

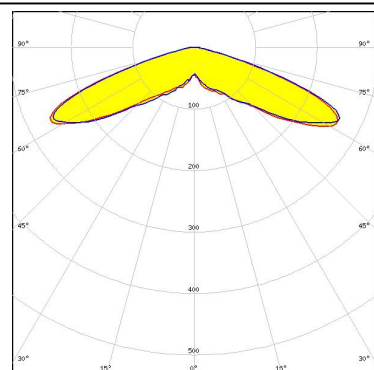

OSRAM

Opto Semiconductors


LED OSCONIQ P 3737 (3W version)
 FWHM 148.0°
 Efficiency 94 %
 Peak intensity 0.370 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

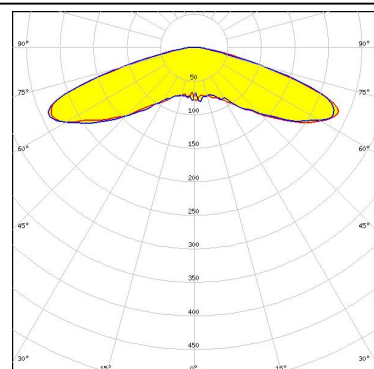

OSRAM

Opto Semiconductors

LED Oslon Square EC
 FWHM 144.0°
 Efficiency 94 %
 Peak intensity 0.380 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

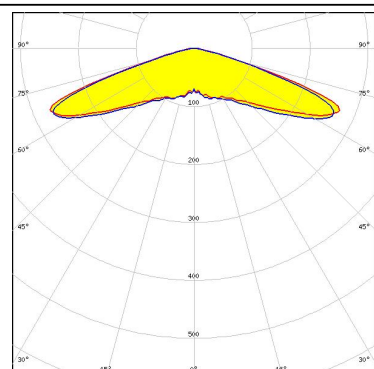


PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED Oslon Square Gen3
FWHM 146.0°
Efficiency 79 %
Peak intensity 0.320 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Undefined Manufacturer: Protective Plate, Glass

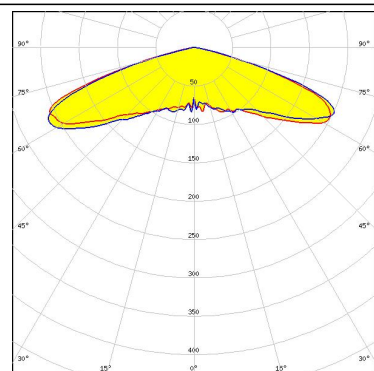

OSRAM

Opto Semiconductors


LED Oslon Square PC
FWHM 144.0°
Efficiency 94 %
Peak intensity 0.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

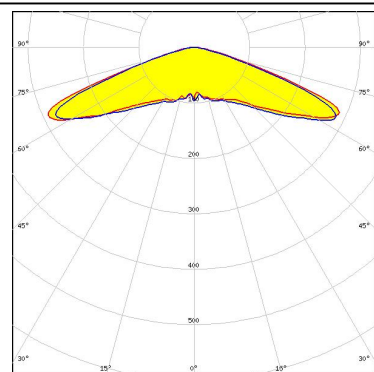

OSRAM


Opto Semiconductors

LED SFH 4714A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.620 cd/lm
LEDs/each optic 1
Light colour White
Required components:

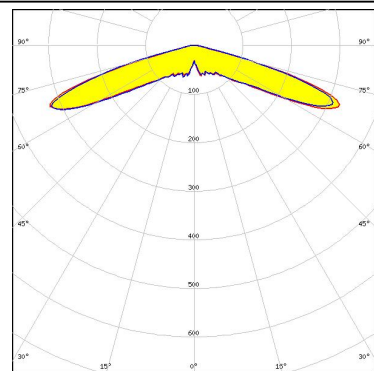

PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4
FWHM 154.0°
Efficiency 94 %
Peak intensity 0.370 cd/lm
LEDs/each optic 1
Light colour White
Required components:

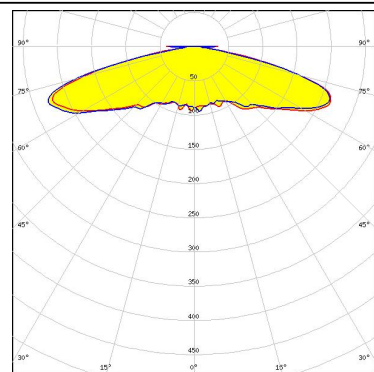

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)