

STRADA-2X2-T4-B

Wide IESNA Type IV forward-throuw beam for wide area lighting like car parks


TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	9 mm
Fastening	pin, screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	8.3 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
STRADA-2X2-T4-B	Multi-lens	PMMA	clear

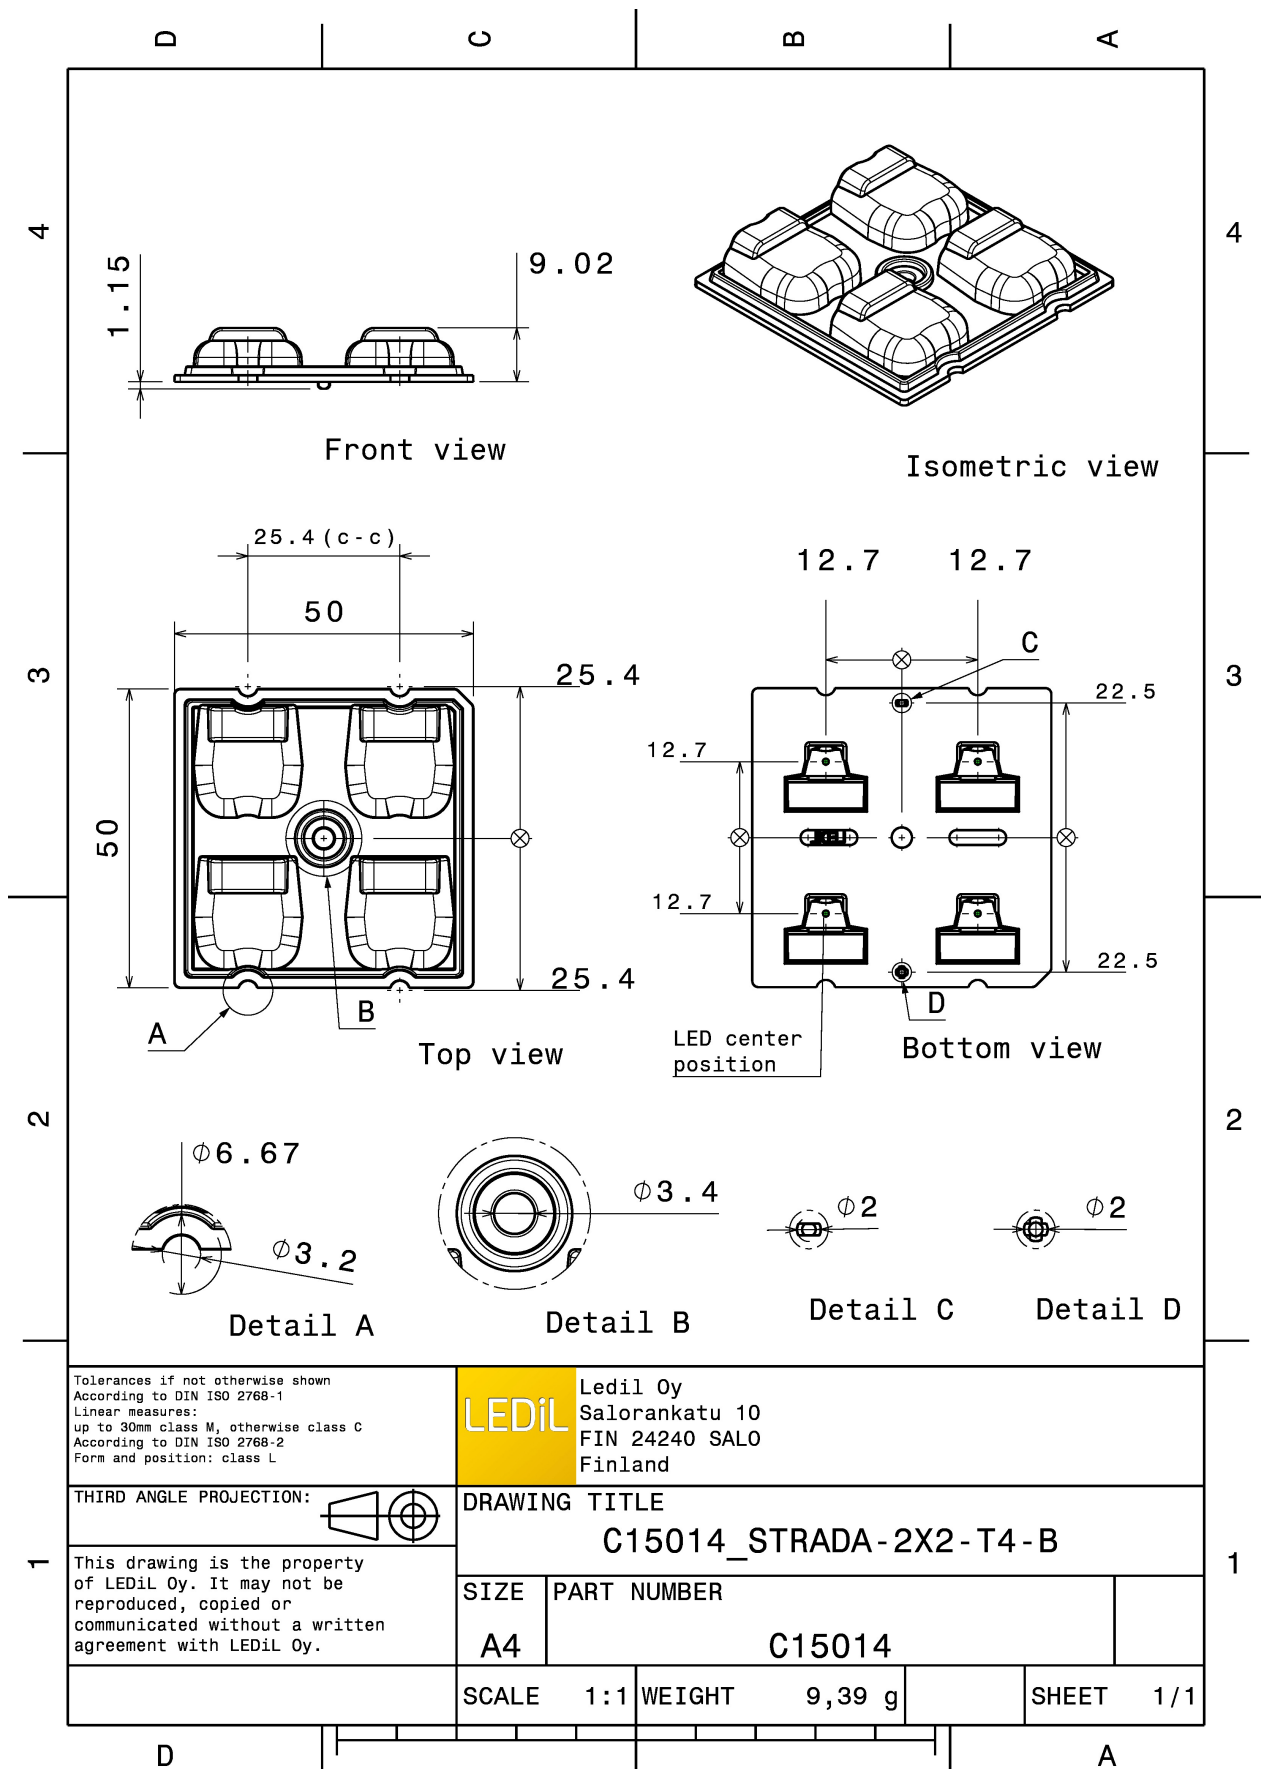


PHOTOMETRIC DATA (MEASURED):




LED Bridgelux SMD 5050
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.580 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

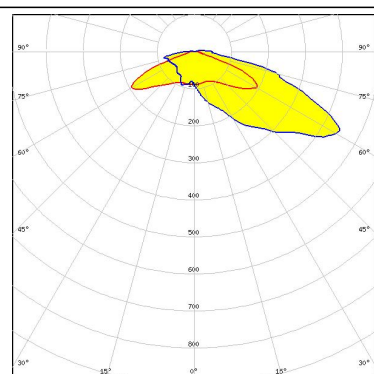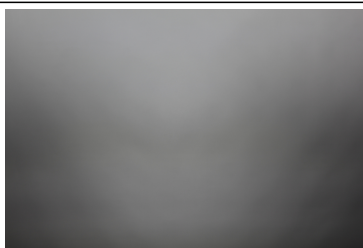


LED QUICK FLUX XTP 2x4 xxx LS G5
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 1.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

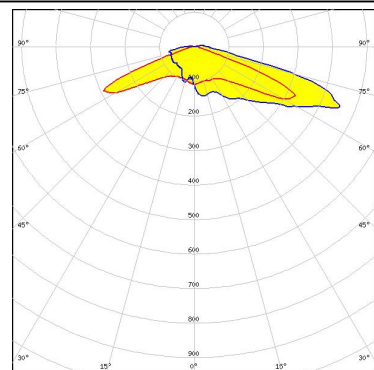

LED QUICK FLUX XTP 2x6 xxx LS G5
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 1.000 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

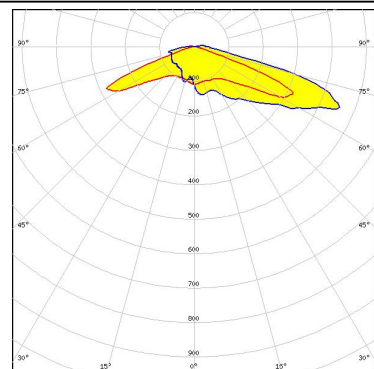


LED QUICK FLUX XTP 2x8 xxx LS G5
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.980 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

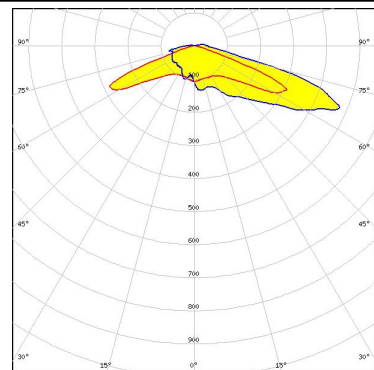



PHOTOMETRIC DATA (MEASURED):




LED XD16
FWHM Asymmetric
Efficiency 93 %
Peak intensity 1.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

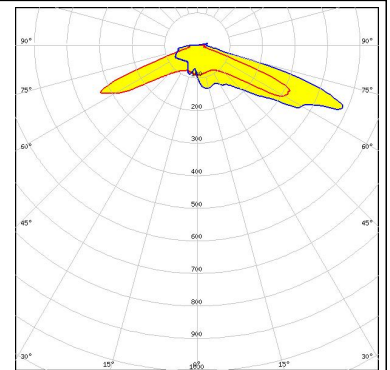


LED XD16
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.690 cd/lm
LEDs/each optic 4
Light colour White
Required components:

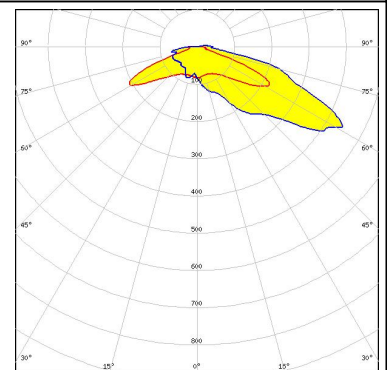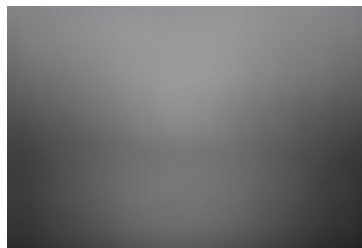

LED XP-L2
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.650 cd/lm
LEDs/each optic 1
Light colour White
Required components:

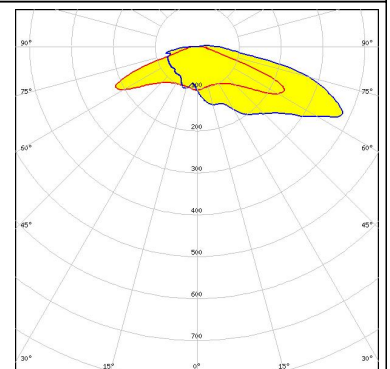


LED LUXEON 5050
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.640 cd/lm
LEDs/each optic 1
Light colour White
Required components:

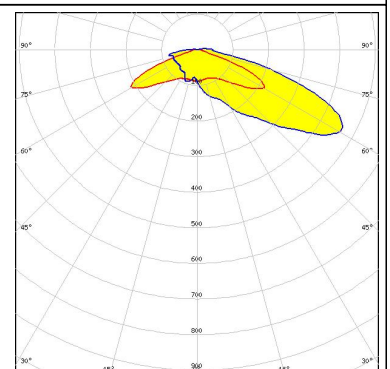

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON C
FWHM Asymmetric
Efficiency 91 %
Peak intensity 1.500 cd/lm
LEDs/each optic 1
Light colour PC Amber
Required components:

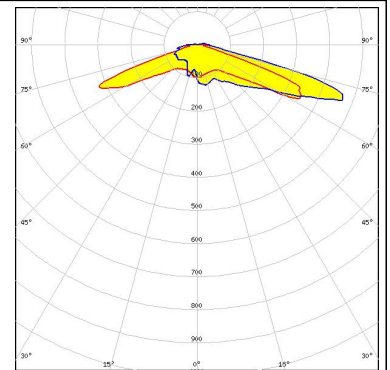


LUMILEDS

LED LUXEON TX
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

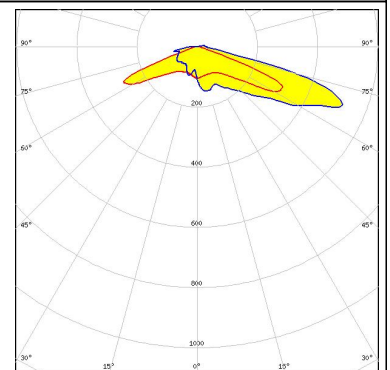


LUMILEDS

LED LUXEON V
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.700 cd/lm
LEDs/each optic 1
Light colour White
Required components:

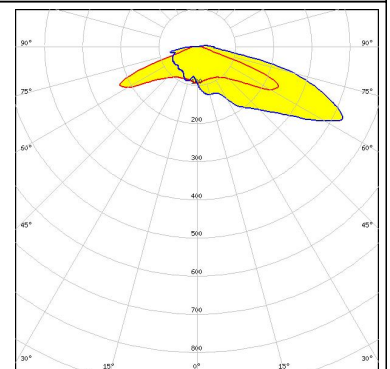

LUMILEDS


LED LUXEON V2
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:

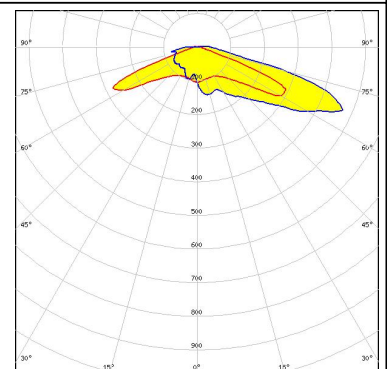


PHOTOMETRIC DATA (MEASURED):




LED NVSW219D
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.830 cd/lm
LEDs/each optic 1
Light colour White
Required components:

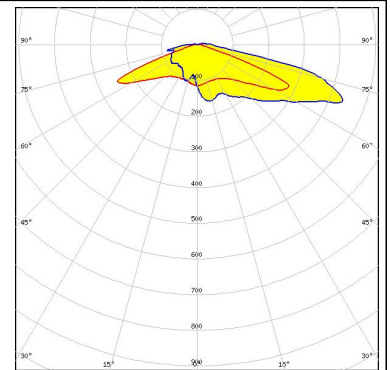


LED NVSW319B
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

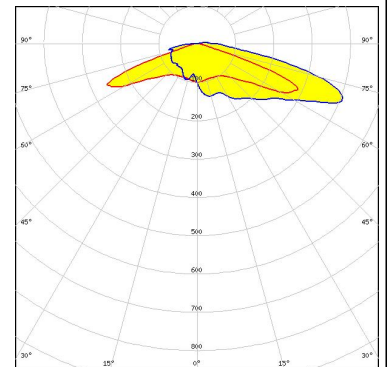

LED NVSW3x9A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.830 cd/lm
LEDs/each optic 1
Light colour White
Required components:

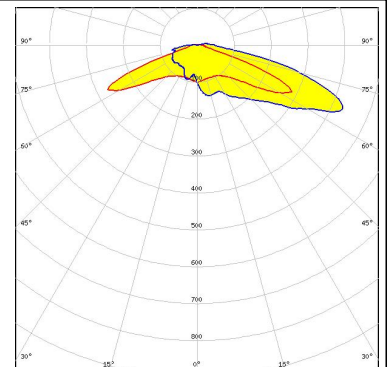

LED NVSxE21A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

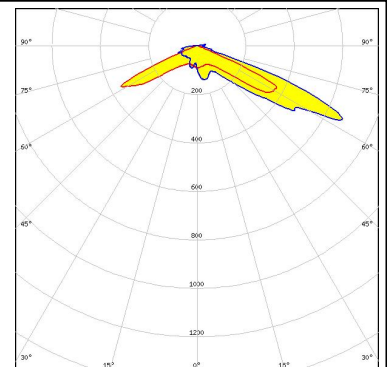


PHOTOMETRIC DATA (MEASURED):

OSRAM


Opto Semiconductors

LED OSLON Square PC
FWHM Asymmetric
Efficiency 93 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

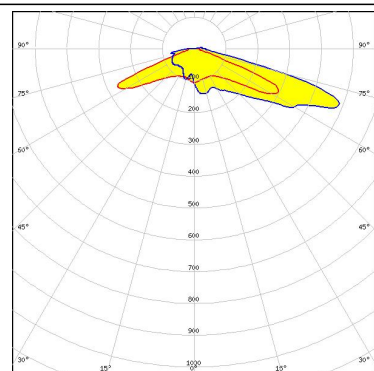


SAMSUNG

LED HiLOM RH16 (LH351C)
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.850 cd/lm
LEDs/each optic 1
Light colour White
Required components:

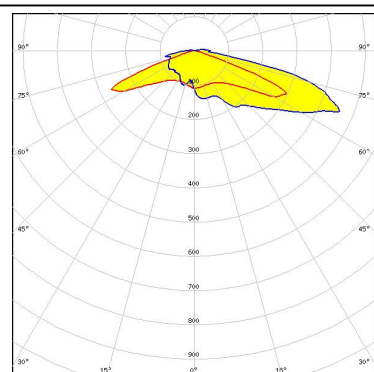


SAMSUNG

LED LH351C
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

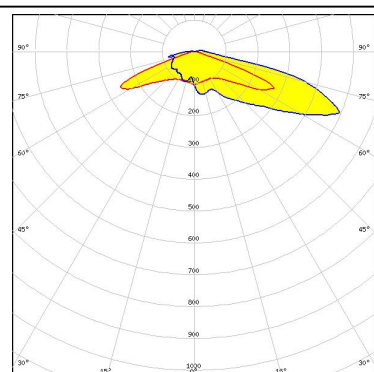

SAMSUNG


LED LH351D
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.630 cd/lm
LEDs/each optic 1
Light colour White
Required components:

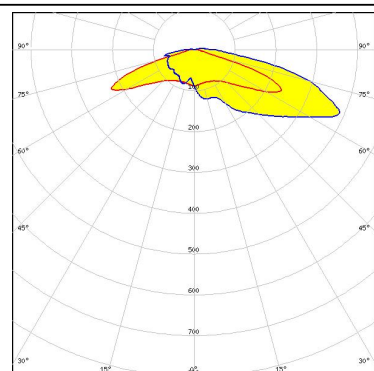



PHOTOMETRIC DATA (MEASURED):

SAMSUNG

LED LH508A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.620 cd/lm
LEDs/each optic 1
Light colour White
Required components:

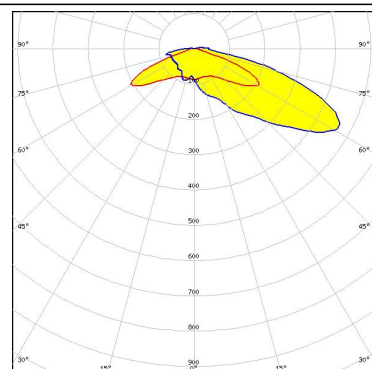

LED Z8Y22
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.960 cd/lm
LEDs/each optic 1
Light colour White
Required components:

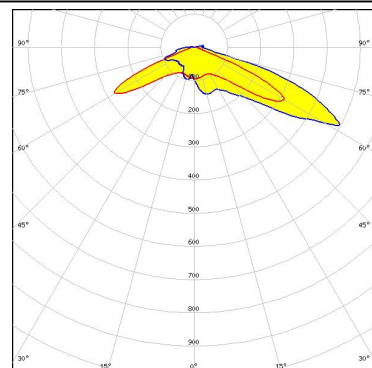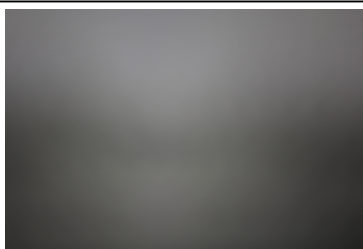


TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

TRIDONIC


LED RLE 2x8 4000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.300 cd/lm
LEDs/each optic 1
Light colour White
Required components:

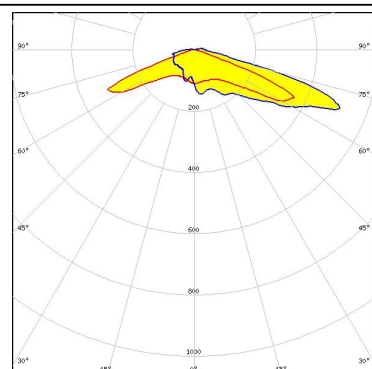

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

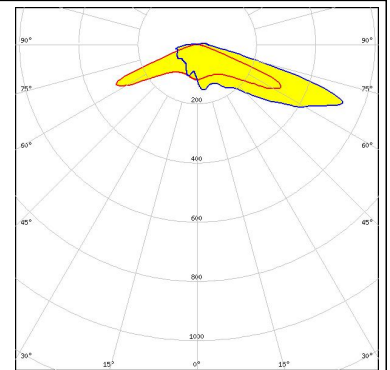


TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

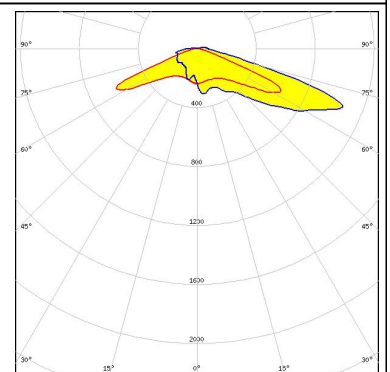


TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

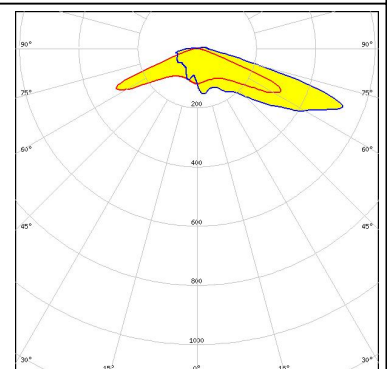

TRIDONIC


LED RLE G1 49x245mm 4000lm xxx EXC OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

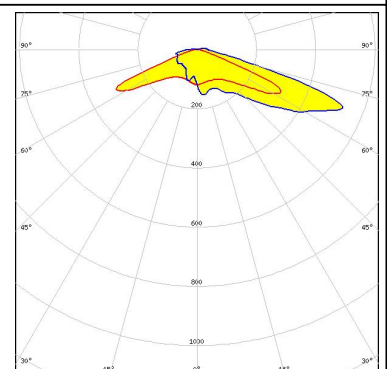


PHOTOMETRIC DATA (SIMULATED):




LED XHP35 HD
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

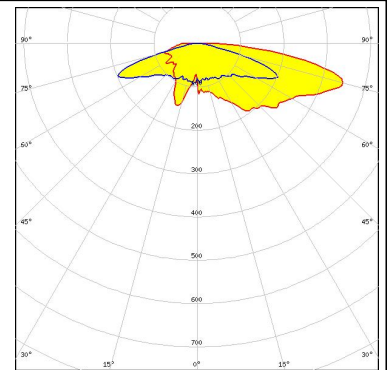


LED XHP35 HI
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

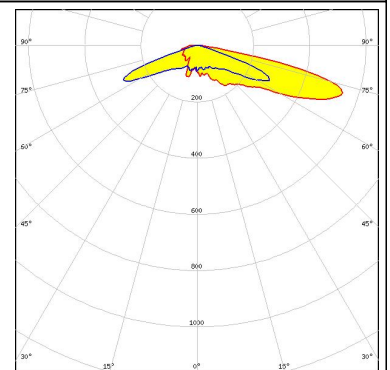

LED XM-L
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

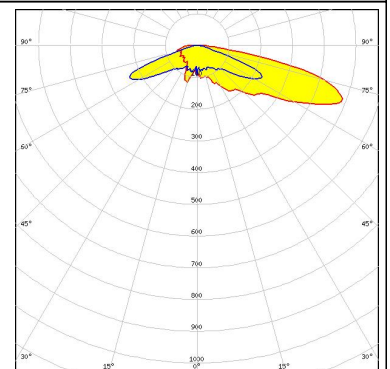


LED XP-G2
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

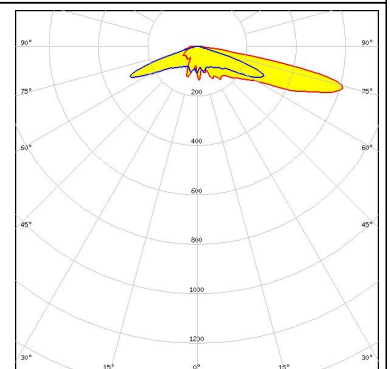


PHOTOMETRIC DATA (SIMULATED):




LED XP-G3
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.740 cd/lm
LEDs/each optic 1
Light colour White
Required components:

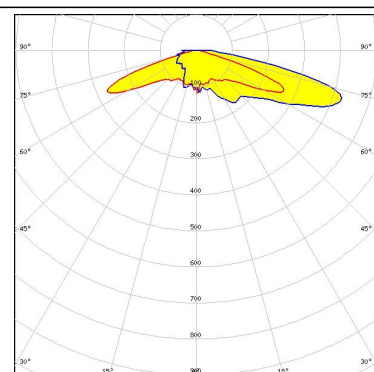


LED XP-L HD
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

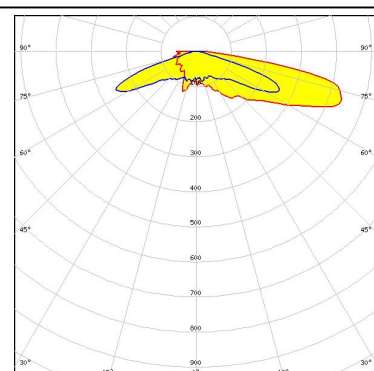

LED XP-L HI
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.980 cd/lm
LEDs/each optic 1
Light colour White
Required components:

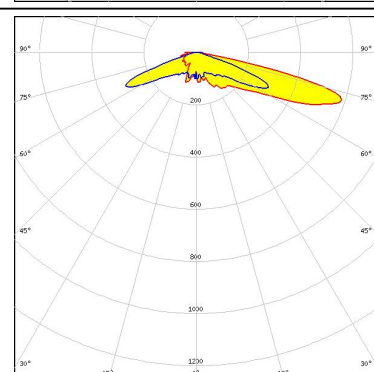


LED XT-E
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

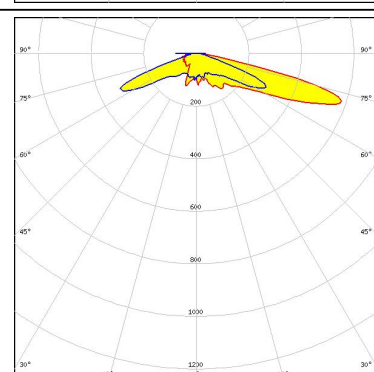


PHOTOMETRIC DATA (SIMULATED):




LED NCSxx19B
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

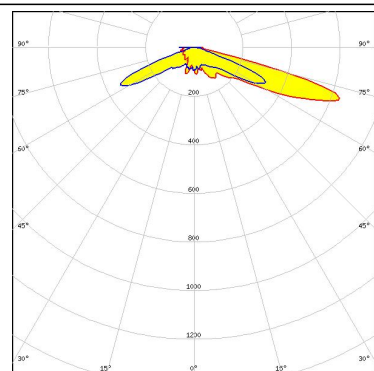


LED NF2x757G
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.860 cd/lm
LEDs/each optic 1
Light colour White
Required components:

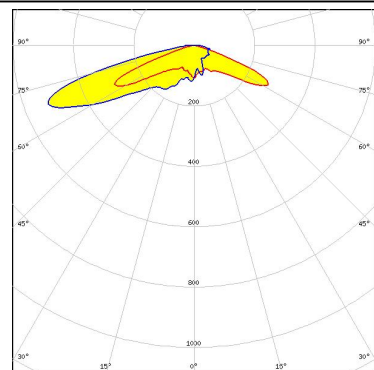

LED NVSxx19B/NVSxx19C
FWHM Asymmetric
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

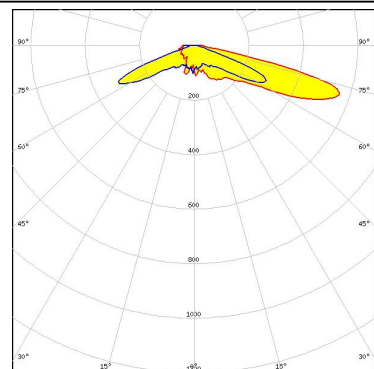


LED NWSx229A
FWHM Asymmetric
Efficiency 87 %
Peak intensity 0.640 cd/lm
LEDs/each optic 1
Light colour White
Required components:

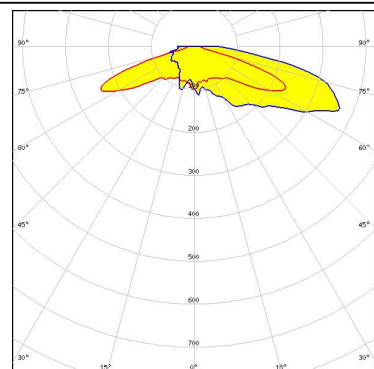

PHOTOMETRIC DATA (SIMULATED):

OSRAM


LED PrevaLED Brick HP 2x8
 FWHM Asymmetric
 Efficiency %
 Peak intensity cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

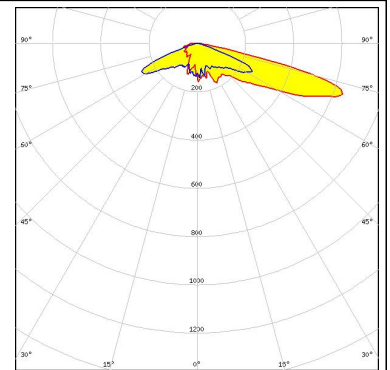

OSRAM

Opto Semiconductors


LED Duris S5 (2 chip)
 FWHM Asymmetric
 Efficiency 91 %
 Peak intensity 0.860 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

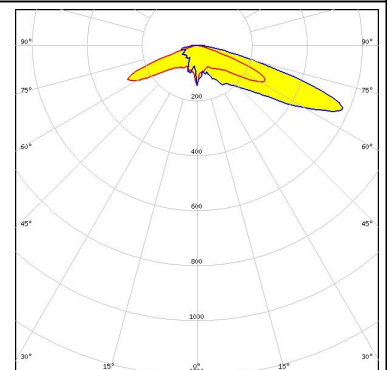

OSRAM

Opto Semiconductors


LED Duris S8
 FWHM Asymmetric
 Efficiency %
 Peak intensity cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

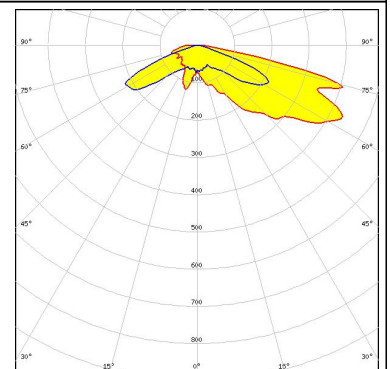

OSRAM

Opto Semiconductors

LED OSCONIQ P 3737 (2W version)
 FWHM Asymmetric
 Efficiency 87 %
 Peak intensity 0.950 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

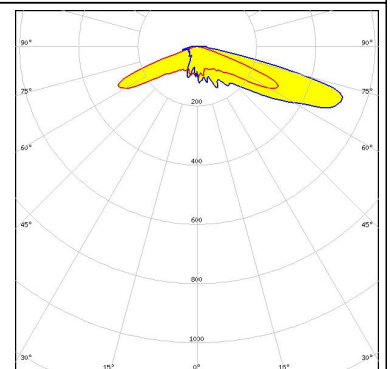


PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED OSCONIQ P 3737 (3W version)
FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.690 cd/lm
LEDs/each optic 1
Light colour White
Required components:

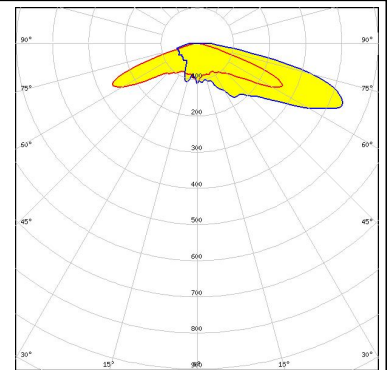

OSRAM


Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.880 cd/lm
LEDs/each optic 1
Light colour White
Required components:

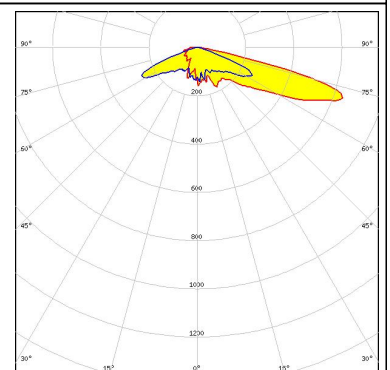


PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4
FWHM Asymmetric
Efficiency 91 %
Peak intensity 1.020 cd/lm
LEDs/each optic 1
Light colour White
Required components:

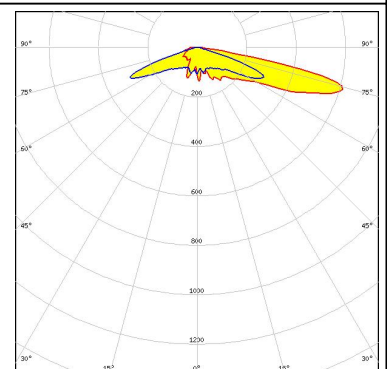

PHILIPS


LED Fortimo FastFlex LED 2x8 DAX G4
FWHM Asymmetric
Efficiency 88 %
Peak intensity 0.710 cd/lm
LEDs/each optic 1
Light colour White
Required components:

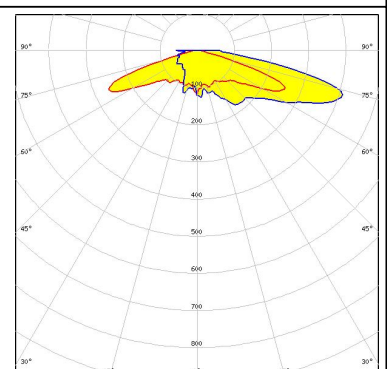

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED LH181B
FWHM Asymmetric
Efficiency 92 %
Peak intensity 1.100 cd/lm
LEDs/each optic 1
Light colour White
Required components:

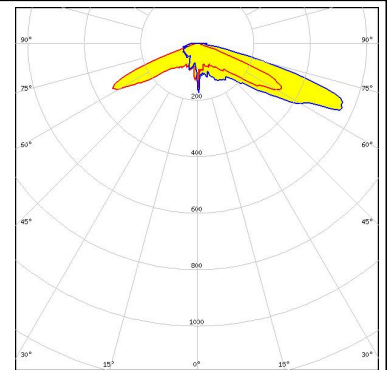


SAMSUNG

LED LH231B
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.988 cd/lm
LEDs/each optic 1
Light colour White
Required components:

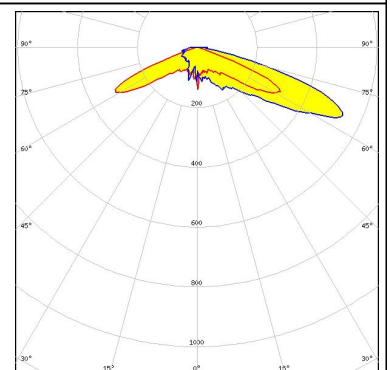

SEOUL SEMICONDUCTOR

LED Z8Y22P
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.960 cd/lm
LEDs/each optic 1
Light colour White
Required components:

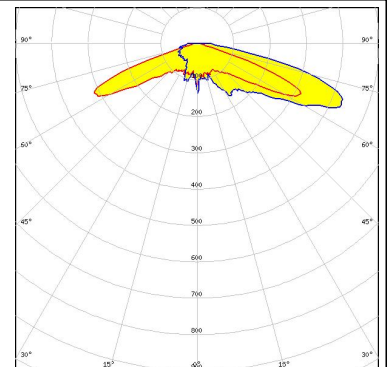

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salu, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)