




Orthomat® Premium Anti Fatigue Mat

Reduces standing fatigue for those that move at work



- Exceptional fatigue-relief properties – a real investment for the workplace.
- Dual layer construction for superior comfort and durability.
- Tough textured top surface for excellent resilience against wear and tear.
- Insulates against the effects of cold concrete floors.
- Low density under layer provides extremely effective underfoot cushioning.
- Ideal for demanding locations, especially where regular turning is involved.
- Tapered edges to reduce trip hazards.
- Range of colours available.
- Fire tested to BS EN 13501-1.

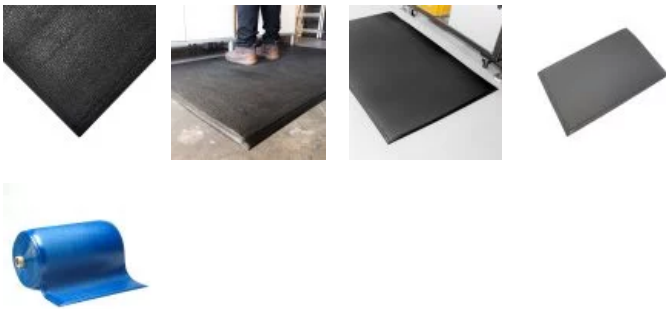

Styles Available



Green

Blue

Black

Parts

Part Number	Size	Colour	Weight
FF010001	0.6 m x 0.9 m	Black	2.00 kg
FF010002	0.9 m x 1.5 m	Black	4.99 kg
FF010003	0.9 m x 18.3 m	Black	61.00 kg
FF010003C	0.9 m x per linear metre	Black	3.80 kg
FF010004	0.9 m x 3.65 m	Black	12.15 kg
FF010005	0.6 m x 18.3 m	Black	45.60 kg

Technical Specification

Material	Open Cell PVC (Foam)
Surface Finish	Pebble
Product Height	12.5 mm
Roll Length	18.3 m
Operating Temperature	0°C to +60°C
Environmental Resistance	Suitable for dry indoor environments

FF010005C	0.6 m x per linear metre	Black	2.49 kg
FF010006	1.2 m x 18.3 m	Black	93.50 kg
FF010006C	1.2 m x per linear metre	Black	5.10 kg
FF010007	Special	Black	
FF010008	0.9 m x 22 m	Black	73.26 kg
FF020003	0.9 m x 18.3 m	Blue	61.00 kg
FF020003C	0.9 m x per linear metre	Blue	3.80 kg
FF040003	0.9 m x 18.3 m	Green	61.00 kg
FF040003C	0.9 m x per linear metre	Green	3.80 kg
FF040005	1.2 m x 18.3 m	Green	88.00 kg

Typical Applications	Production lines, Assembly areas, Packing stations, Workbenches, Retail counters
Installation Method	Loose lay
Cleaning Method	Brush/mop the top surface
Fire Tested to	BS EN 13501-1 Class Dfl - s1
Country of Origin	China
Guarantee	2 years when used in a dry environment

Get in touch | To order FREE samples or arrange a site visit please call +44 (0)116 240 1088 or email sales@cobaeurope.com