
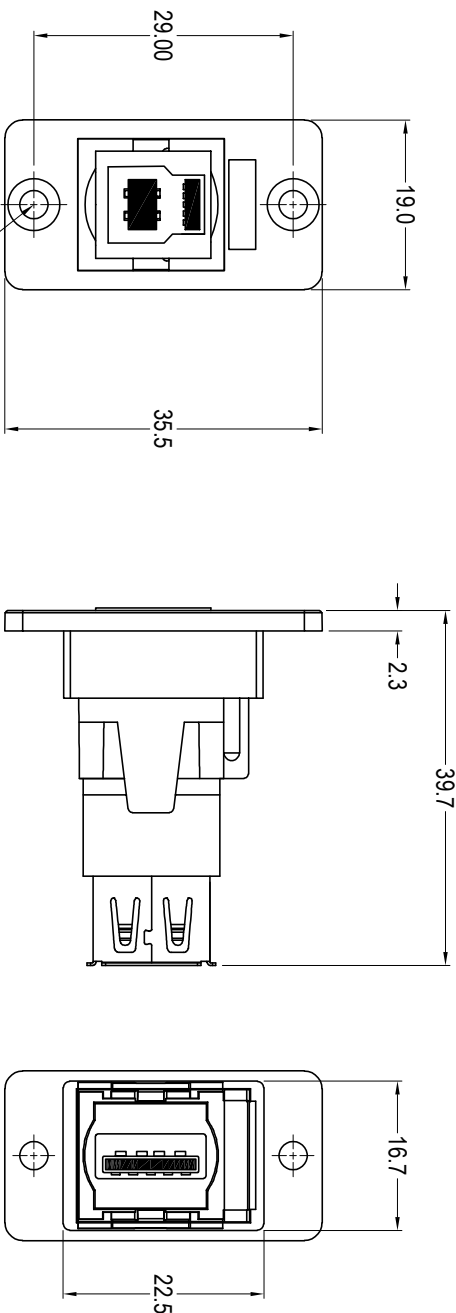
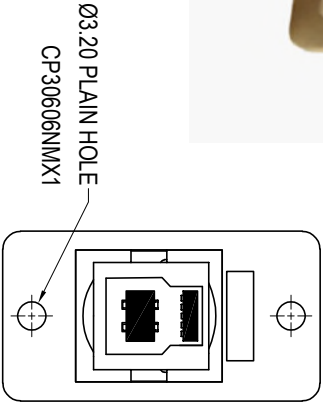
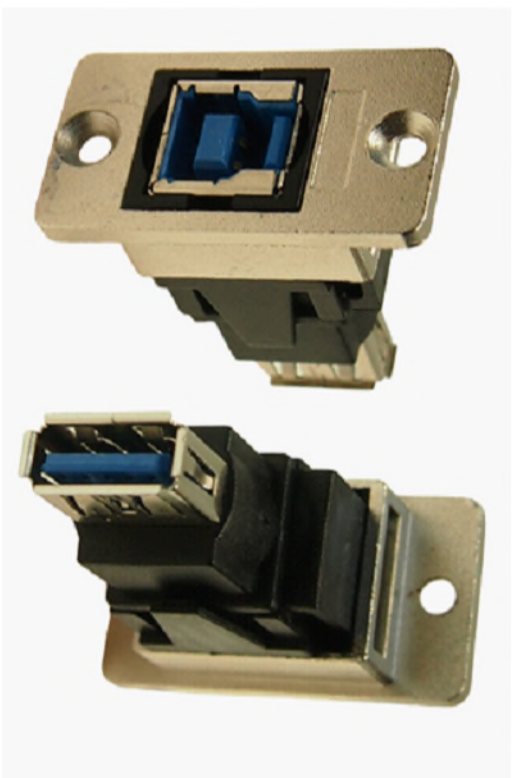


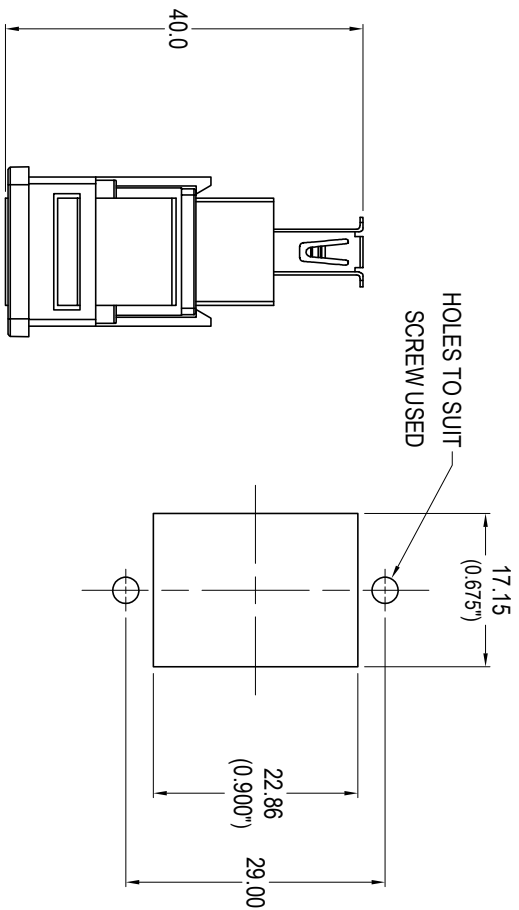

2x HOLE VARIANTS
Ø3.2mm CSK 90° x Ø5.85
PLAIN Ø3.2 HOLES

- Specification:
1. Voltage rating: 30V AC
 2. Current rating: 1.8A max
 3. Contact resistance: 50mΩ max
 4. Insulation resistance: 20MΩ min
 5. Dielectric withstanding voltage: 500V AC
 6. Operating Temperature: -20°C to 50°C

- Material:
1. Insert: ABS UL94 HB
 2. FT Frame: Zinc Diecast, Nickel Plated
 3. Inner Overmouldings: PE + PVC
 4. Shell: Nickel plated steel
 5. Contacts: Gold Plated

VARIANTS	
PART NO.	HOLE DETAILS
CP30606NM	HOLE Ø3.2 x CSK 90° x Ø5.85
CP30606NMX1	PLAIN HOLE Ø3.2

ROHS
COMPLIANT

TOLERANCE
NO DEC. PLACE ±
1 DEC. PLACE ±
2 DEC. PLACE ±
HOLE Ø ±
ANGLES ±
UNLESS
OTHERWISE STATED

Cliff Electronic Components Ltd.

76 Holmehope Avenue, Holmehope Industrial Estate,
Redhill, Surrey RH1 2PF, England, UK
Tel: 01737 771375 Fax: 01737 766012 Website: www.cliffuk.co.uk

DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE STATED. WORK TO DIMENSIONS. REMOVE ALL BURRS. IF IN DOUBT ASK.
FINISH: See Notes
DRAWN: T.J.O. APPROVED: D.P.J.

TITLE: FRONT MOUNT METAL SLIM FT USB3 B-A
DRWG. No. CP30606NM

FORM: A4DRWGH

THE CONTENTS OF THIS DOCUMENT MUST NOT BE COPIED OR DISCLOSED TO A 3RD PARTY WITHOUT WRITTEN PERMISSION OF CLIFF-UK © 2021