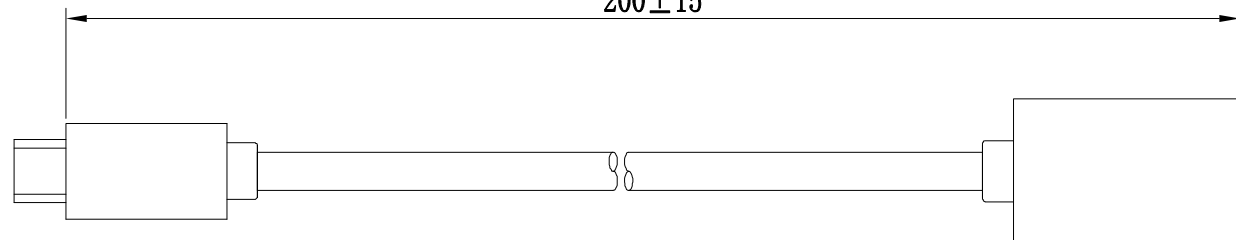




A		B		C		D		E		F																																					
								<table><tr><td colspan="2">DIMENSION</td><td>0~8</td><td>8~25</td><td>25~50</td><td>50~100</td><td>100~200</td><td>200~300</td><td>∠ (DEG)</td></tr><tr><td colspan="2">TOLERANCE</td><td>±0.08</td><td>±0.10</td><td>±0.12</td><td>±0.18</td><td>±0.20</td><td>±0.30</td><td>±0.20°</td></tr><tr><td>MARK</td><td>ZONE</td><td>DESCRIPTION</td><td>REV.</td><td colspan="3">Modify</td><td>APRD.</td><td>DATE</td></tr><tr><td></td><td></td><td></td><td>A</td><td colspan="3"></td><td></td><td></td></tr></table>		DIMENSION		0~8	8~25	25~50	50~100	100~200	200~300	∠ (DEG)	TOLERANCE		±0.08	±0.10	±0.12	±0.18	±0.20	±0.30	±0.20°	MARK	ZONE	DESCRIPTION	REV.	Modify			APRD.	DATE				A							
DIMENSION		0~8	8~25	25~50	50~100	100~200	200~300	∠ (DEG)																																							
TOLERANCE		±0.08	±0.10	±0.12	±0.18	±0.20	±0.30	±0.20°																																							
MARK	ZONE	DESCRIPTION	REV.	Modify			APRD.	DATE																																							
			A																																												
																																															
Conn.1								Conn.2																																							
		NOTE: 1.Electronic Test(Electrical Performance): 100% Open & Short & Mis-wire Test Conductive Resistance:3 OHM Max. Insulation Resistance:5M OHMS Min. Insulation Voltage: 300V DC/10ms Hi-Pot: AC300V,10ms. All Test Duability: 0.3SEC 2.RoHS Compliant Certified 3.One cable per palybag																																													
Wire Diagram																																															
CONN1:TYPE-CM		CONTACT		CONN2:USB3.0-AF																																											
PIN	Signal Name	Signal Name		PIN	Signal Name																																										
A1,A12,B1,B12	GND	GND_PWRrt1 SDP1_Drain,SDP2_Drain		4 7	GND GND_DRAIN																																										
A4,B4,A9,B9	VBUS	PWR_VBUS1		1	VBUS																																										
A5	CC																																														
B5	vcom																																														
A6	Dp1	UTP_Dp	3	D+																																											
A7	Dn1	UTP_Dn	2	D-																																											
A2	SSTXp1	SDPp1	9	MicB_SSRX+																																											
A3	SSTXn1	SDPn1	8	MicB_SSRX-																																											
B11	SSRXp1	SDPp2	6	MicB_SSTX+																																											
B10	SSRXn1	SDPn2	5	MicB_SSTX-																																											
Shell	Shield	Shield	Shell	Shield																																											
								<table><tr><td>4</td><td>material</td><td>35P PVC BLACK ROHS</td><td>g</td><td>20</td></tr><tr><td>3</td><td>connector</td><td>3.0Ver TYPE-CM 5.1K Ω. BLACK Insulator.Shell</td><td>PCS</td><td>1</td></tr><tr><td>2</td><td>connector</td><td>3.0Ver USB_A F.Blue Insulator.Shell</td><td>PCS</td><td>1</td></tr><tr><td>1</td><td>CABLE</td><td>USB3.0 (1P#30+D+AL+Mylar)*2C+1P#30+2C#24+AL+64TC+B OD4.5 Black</td><td>mm</td><td>0.15</td></tr><tr><td></td><td>NAME</td><td>MATERIAL DESCRIPTION</td><td>UNIT</td><td>QTY</td></tr></table>		4	material	35P PVC BLACK ROHS	g	20	3	connector	3.0Ver TYPE-CM 5.1K Ω. BLACK Insulator.Shell	PCS	1	2	connector	3.0Ver USB_A F.Blue Insulator.Shell	PCS	1	1	CABLE	USB3.0 (1P#30+D+AL+Mylar)*2C+1P#30+2C#24+AL+64TC+B OD4.5 Black	mm	0.15		NAME	MATERIAL DESCRIPTION	UNIT	QTY													
4	material	35P PVC BLACK ROHS	g	20																																											
3	connector	3.0Ver TYPE-CM 5.1K Ω. BLACK Insulator.Shell	PCS	1																																											
2	connector	3.0Ver USB_A F.Blue Insulator.Shell	PCS	1																																											
1	CABLE	USB3.0 (1P#30+D+AL+Mylar)*2C+1P#30+2C#24+AL+64TC+B OD4.5 Black	mm	0.15																																											
	NAME	MATERIAL DESCRIPTION	UNIT	QTY																																											
								<table><tr><td colspan="3"> VCOM International Ltd.</td><td colspan="2">SHEET:</td></tr><tr><td colspan="3"></td><td colspan="2">1 OF 1</td></tr><tr><td>DRWN: Xiang</td><td>DATE: 2022. 12. 6</td><td colspan="2" rowspan="3">PART NAME: USB 3.0 AF TO TYPE CM CABLE</td><td colspan="2" rowspan="3"> 3rd</td></tr><tr><td>CHKD:</td><td>DATE:</td></tr><tr><td>APRD:</td><td>DATE:</td></tr><tr><td>MO:</td><td>UNIT: mm</td><td>CUST NO. :</td><td>PAPER SIZE</td><td>A4</td></tr><tr><td>CUST:</td><td>SCALE:</td><td>DRAWING NO. :CU409</td><td>WEIGHT:</td><td>g</td></tr></table>		 VCOM International Ltd.			SHEET:					1 OF 1		DRWN: Xiang	DATE: 2022. 12. 6	PART NAME: USB 3.0 AF TO TYPE CM CABLE		 3rd		CHKD:	DATE:	APRD:	DATE:	MO:	UNIT: mm	CUST NO. :	PAPER SIZE	A4	CUST:	SCALE:	DRAWING NO. :CU409	WEIGHT:	g								
 VCOM International Ltd.			SHEET:																																												
			1 OF 1																																												
DRWN: Xiang	DATE: 2022. 12. 6	PART NAME: USB 3.0 AF TO TYPE CM CABLE		 3rd																																											
CHKD:	DATE:																																														
APRD:	DATE:																																														
MO:	UNIT: mm	CUST NO. :	PAPER SIZE	A4																																											
CUST:	SCALE:	DRAWING NO. :CU409	WEIGHT:	g																																											
A		B		C		D		E		F																																					