
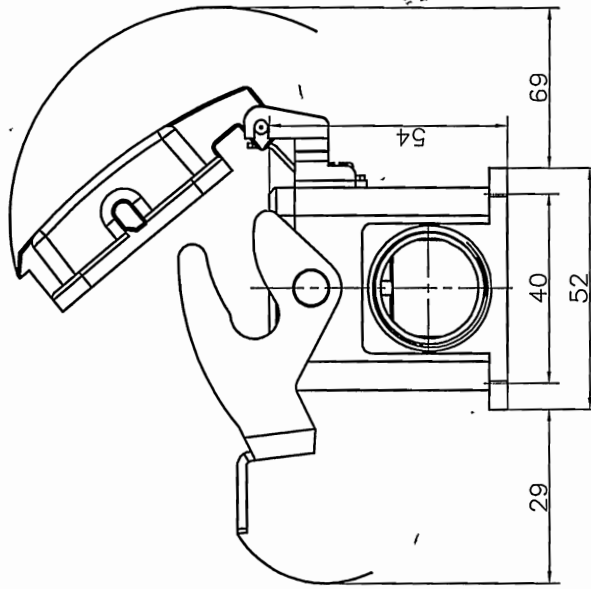
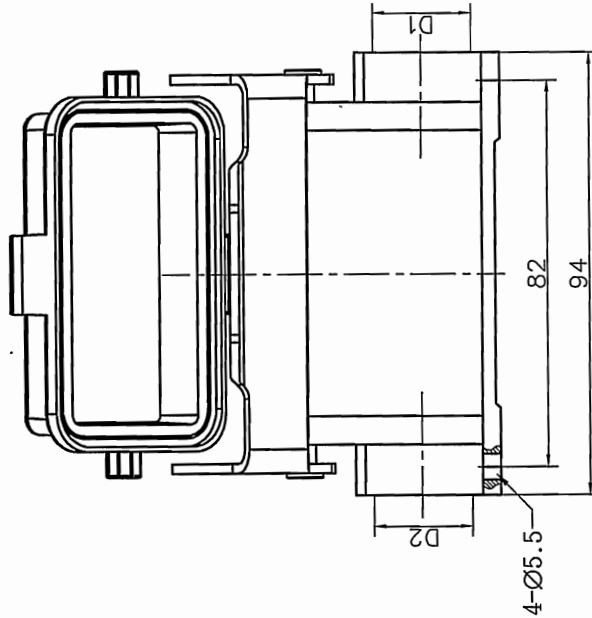


TYPE	Thread		Selection
	D1	D2	
D10B-SF-1L-CV-M20	M20	—	
D10B-SF-1L-CV-2M20	M20	M20	
D10B-SF-1L-CV-M25	M25	—	
D10B-SF-1L-CV-2M25	M25	M25	
D10B-SF-1L-CV-PG16	PG16	—	
D10B-SF-1L-CV-2PG16	PG16	PG16	

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT

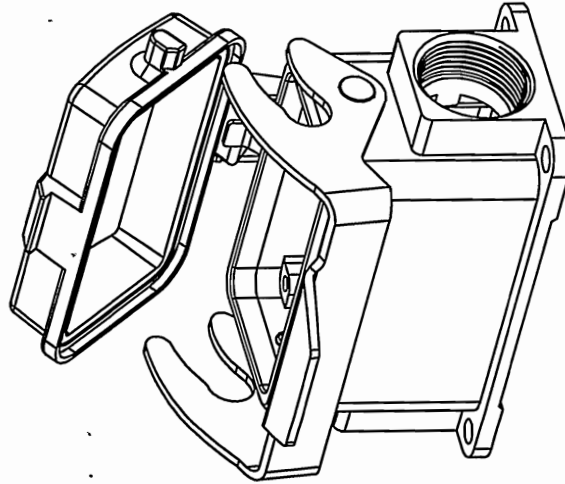

Housings Feature

- 01.Material: aluminium die-cast
- 02.Surface:Powder-coated
- 03.Color:grey(RAL 7037)
- 04.Material:Metal(Lever)
- 05.Sealing:NBR
- 06.Covers:Plastic
- 07.Limiting temperatures:-40°C ~ +125°C
- 08.Flammability acc to UL94:V0
- 09.Degree of protection acc.to EN60529 for coupled connector :IP65
- 10.Rohs compliance

PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD
APPD:	H15 2017.7.1	NAME: D10B-SF-1L-CV-M/PG
CHKD:	CHK 2017.7.1	TITLE: CUSTOMER DRAWING
DRFT:	Mr.yang 2017/06/28	REV
		DO NOT SCALE
		SCALE
THIRD ANGLE PROJECTION		1:1.5

宁波高松电子有限公司



NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

D10B-SF-1L-CV-M/PG

TITLE: CUSTOMER DRAWING

REV

DO-1

DRAWING NO.:

SHEET

1/1

DO NOT SCALE

SCALE

1:1.5