




| TYPE             | Thread |      | Selection |
|------------------|--------|------|-----------|
|                  | D1     | D2   |           |
| D24B-SF-1L-M25   | M25    | —    |           |
| D24B-SF-1L-2M25  | M25    | M25  |           |
| D24B-SF-1L-PG21  | PG21   | —    |           |
| D24B-SF-1L-2PG21 | PG21   | PG21 |           |

| REVISION RECORD |     |             |      |      |
|-----------------|-----|-------------|------|------|
| REV             | ECN | DESCRIPTION | DRFT | DATE |
|                 |     |             |      |      |

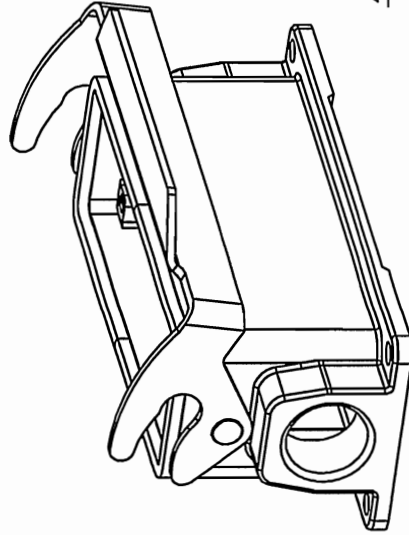

## Housings Feature

- 01.Material: aluminium die-cast
- 02.Surface: Powder-coated
- 03.Color: grey (RAL 7037)
- 04.Material: Metal (Lever)
- 05.Sealing: NBR
- 06.Limiting temperatures:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 07.Flammability acc to UL94: V0
- 08.Degree of protection acc.to EN60529 for coupled connector : IP65
- 09.Rohs compliance

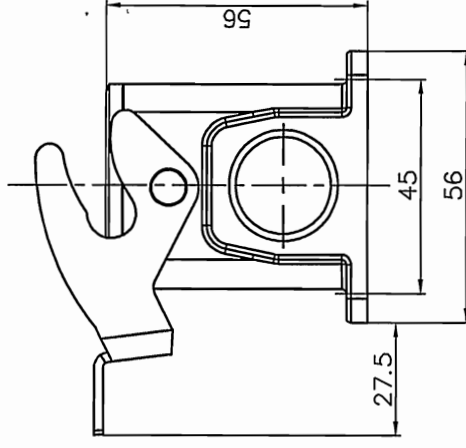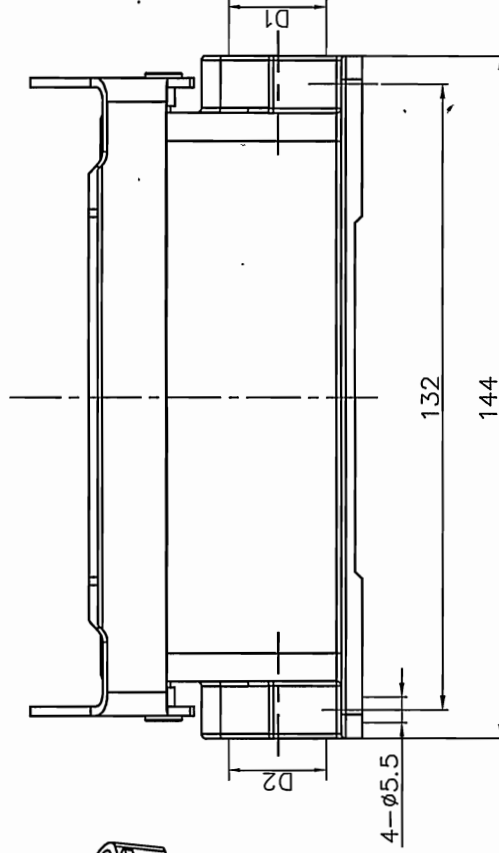

|                          |                         |                                   |             |
|--------------------------|-------------------------|-----------------------------------|-------------|
| PART NO.: /              |                         | NINGBO DEGSON ELECTRICAL CO., LTD |             |
| APPD: HJG2017.7.7        | NAME: D24B-SF-1L-M/PG   |                                   |             |
| CHKD: CMK 2017.7.7       | TITLE: CUSTOMER DRAWING |                                   |             |
| DRFT: Mr.yang 2017/06/28 | DRAWING NO.:            | REV                               | DO-1        |
| THIRD ANGLE PROJECTION   |                         | SHEET                             | 1/1         |
|                          |                         | DO NOT SCALE                      | SCALE 1:1.5 |
|                          |                         | MM (INCH)                         | 2 1         |

DETACHED LISTS