

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

Technical characteristics:

Specifications





DIN EN 60 664-1,
DIN EN 61 984

Inserts

01. Number of contacts :3+PE
02. Rated Current :10A
03. Rated Voltage conductor-ground :230V
04. Rated Voltage conductor-conductor :400V
05. Pollution degree :3
06. Rated impulse voltage :4kv
07. or:10A/250V/4KV/3
08. Insulation resistance : $\geq 10^9 \Omega$
09. Material:Polycarbonate
10. Colour:RAL 7032(Light grey)
11. Rated voltage acc.to UL/CSA:600V
12. Limiting temperatures : $-40^{\circ}\text{C}\sim +125^{\circ}\text{C}$
13. Flammability acc.to UL94:V0
14. Mechanical working life (mating cycles) : ≥ 500

Contacts

01. Material:Copper alloy
02. Surface:hard-silver plated
03. Contact resistance : $\leq 3\text{m}\Omega$
04. Terminal :Cage-clamp
05. Wire gauge :0.2-2.5mm² (AWG 26-14)
06. Stripping length :9.0mm
07. Rohs Compliance

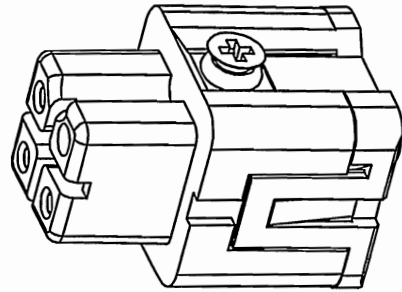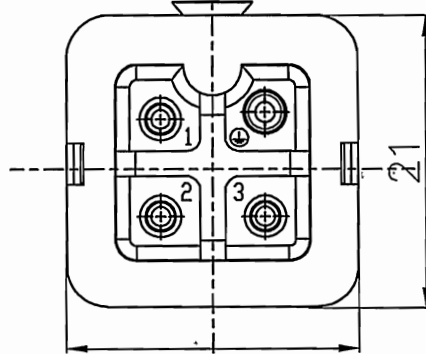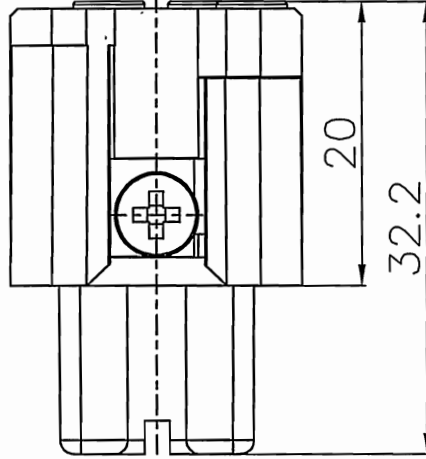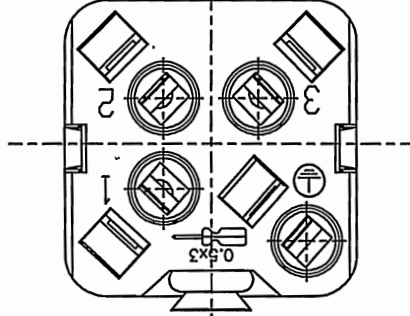

DETACHED LISTS	PART NO.: DA003FS	NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: 11/5 2016.7.16	DA-003-FS	
	CHKD: Ljm 2016.7.16	DA-003-FS-E01	
	DRFT: Mr. Yang 2016.06.16	DA-003-FS-E01	
THIRD ANGLE PROJECTION		DO NOT SCALE	SCALE
		MM (INCH)	1/1
		2	2:1