

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1





DIN EN 61 984

Inserts

- 01.Number of contacts :3+PE
- 02.Rated Current :10A
- 03.Rated Voltage conductor-ground :230V
- 04.Rated Voltage conductor-conductor :400V
- 05.Pollution degree :3
- 06.Rated impulse voltage :4kv
- 07.or:10A/250V/4KV/3
08. Insulation resistance : $\geq 10^{10} \Omega$
- 09.Material:Polycarbonate
- 10.Colour:RAL 7032(Light grey)
- 11.Rated voltage acc.to UL/CSA:600V
- 12.Limiting temperatures : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 13.Flammability acc.to UL94:V0
- 14.Mechanical working life
(mating cycles) : ≥ 500

Contacts

- 01.Material:Copper alloy
- 02.Surface:hard-silver plated
- 03.Contact resistance : $\leq 3\text{m}\Omega$
- 04.Terminal :Cage-clamp
- 05.Wire gauge :0.2-2.5mm² (AWG 26-14)
- 06.Stripping length :9.0mm
- 07.Rohs Compliance

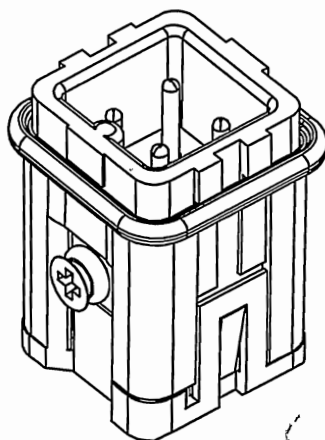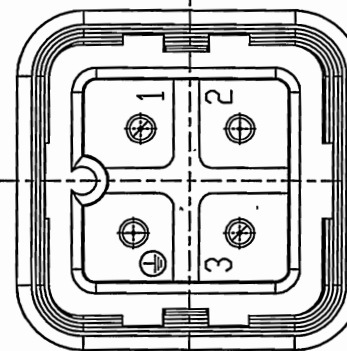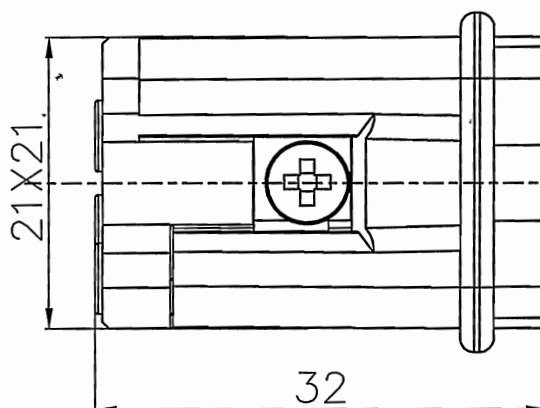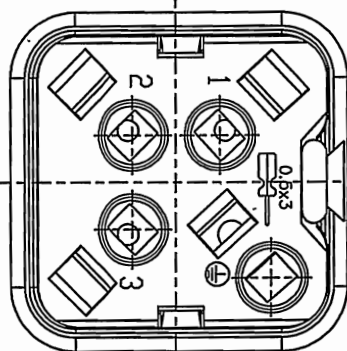

DETACHED LISTS	PART NO.: DA003MS	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD: HJS 2016.7.18	NAME: DA-003-MS			
	CHKD: Ljm 2016.7.16	TITLE: CUSTOMER DRAWING			
	DRFT: Mr.Yang 2016.06.16	DRAWING NO.: DA-003-MS-E01	REV	DO-1	
	THIRD ANGLE PROJECTION	DRAWING NO.: DA-003-MS-E01	SHEET	1/1	

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

SCALE

2:1