

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT

Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

01. Number of contacts :10+PE

02. Rated Current :16A

03. Rated Voltage :250V

04. Pollution degree :3

05. Rated impulse voltage :4kv_u06. Insulation resistance : $\geq 10^9 \Omega$

07. Material:Polycarbonate

08. Colour:RAL 7032(Light grey)

09. Rated voltage acc. to UL/CSA:600V

10. Limiting temperatures : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

11. Flammability acc. to UL94:V0

12. Mechanical working life

(mating cycles) : ≥ 500

Contacts

01. Material:Copper alloy

02. Surface:hard-silver plated

03. Contact resistance : $\leq 1\text{m}\Omega$

04. Terminal :Crimp terminal




05. Wire gauge :0.14-4.0mm² (AWG 26-12)

06. Stripping length :7.5mm

07. Rohs Compliance

Note:Crimp contact pins should
order separately

M3X10

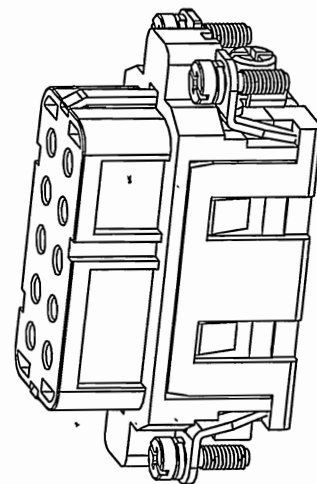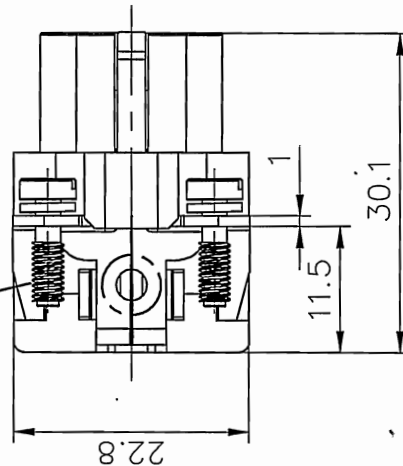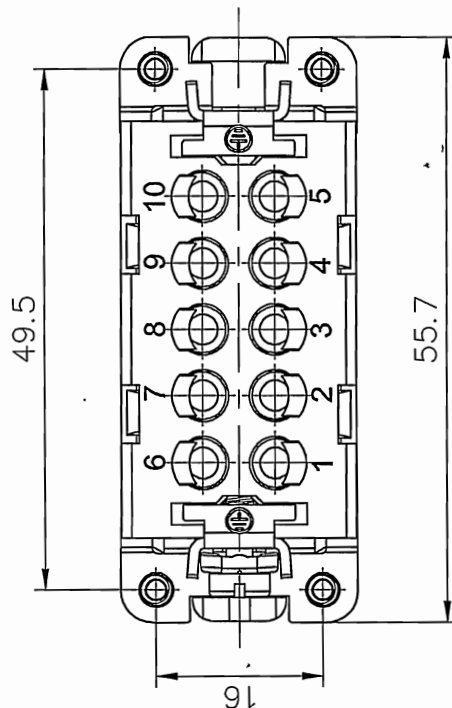

PART NO.:

/

DETACHED LISTS

APPD:


HJS 2016.8.26

CHKD:

Lym 2016.8.25

DRFT:

yang 2016.07.25



THIRD ANGLE PROJECTION



NINGBO DEGSON ELECTRICAL CO., LTD

NAME:

DA-010-FC

TITLE: CUSTOMER DRAWING

DRAWING NO.: DA-010-FC-E01

DO NOT SCALE

DRAWING SCALE

SHEET 1/1

SCALE 1.5:1