

|                           |                               |                                                                                     |
|---------------------------|-------------------------------|-------------------------------------------------------------------------------------|
| 52103500                  | <b>DATA SHEET</b>             |  |
| Valid from:<br>26.08.2024 | <b>SKINDICHT® SM-NPT INOX</b> |                                                                                     |


The SKINDICHT® SM-NPT INOX is a stainless steel hex locknut.  
 The locknut is used where cable glands are attached but there is only a pass-through hole.



**Technical features:**

|                   |                            |
|-------------------|----------------------------|
| Material          | Stainless steel (AISI 304) |
| Sizes             | 1/2" up to 2" NPT          |
| Temperature range | -60 °C up to +200 °C       |

**Norm-Referenzen:**

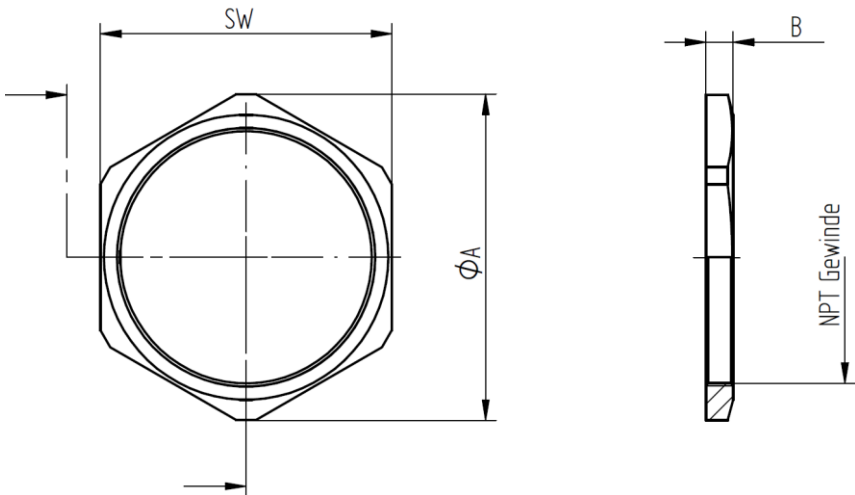

| NPT    | SW<br>[mm] | Ø A<br>[mm] | B<br>[mm] | Art. Nr.  |
|--------|------------|-------------|-----------|-----------|
| 1/2"   | 27         | 30,0        | 4,0       | 5210 3500 |
| 3/4"   | 32         | 35          | 4,5       | 5210 3510 |
| 1"     | 38         | 42          | 6,0       | 5210 3520 |
| 1 1/4" | 48         | 53          | 6,5       | 5210 3530 |
| 1 1/2" | 55         | 61          | 7,0       | 5210 3531 |
| 2"     | 70         | 78          | 7,5       | 5210 3532 |

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

|                                          |                                       |             |
|------------------------------------------|---------------------------------------|-------------|
| Creator: MAU1/PDP<br>Released: DAMU1/PDP | Document: DB52103500EN<br>Version: 02 | Page 1 of 1 |
|------------------------------------------|---------------------------------------|-------------|