

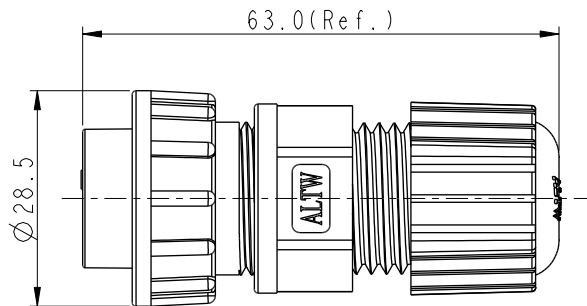


Conn.
Pin Assignments
Front View



- △E Note:
- *  Important Dimension To Check
 - * Waterproof Rate: IP67, Mated
 - * O-Ring: Rubber, Gray
 - * Connector: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Lock Nut: Thermoplastic, Black
 - △C * Gasket: Rubber, Black
 - * Clamp Ring: Thermoplastic, Black
 - △D * Seal: Rubber, Gray
 - * Sealing Nut: Thermoplastic, Black
 - △B * Cable OD Max: Ø9.5~10.8mm
 - * One set unassembled in one pe bag

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE O CERES, D-20A+2A, 08P, CABLE W/O SR F, F PWR+M SIG, FI SOLDER, 2LOCK △E			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. E	WC-REV. B.3	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO DCU-08BFDA-LL7001	DRAWN BY JC Chen	DATE 2019-07-18
DWG NO DCU-08BFDA-LL7001	CHECKED BY Li Feng	DATE 2019-07-18
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-07-18

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.