


REVISION RECORD					1
REV	ECN	DESCRIPTION	DRAFT	DATE	

(Without Cover)

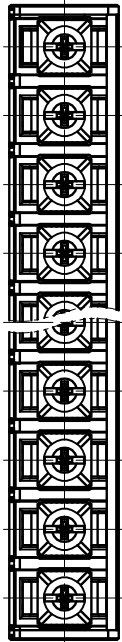

NOTE1:

UL Standard

- 1.Rated voltage/current : 300V / 50A
- 2.Torque value : M5 , 17.54Lb.in
- 3.Wire range : 22~8AWG






NOTE2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 14.50mm, Poles : N=02~14P
- 3.Stripping length : 12~13mm
- 4.Withstanding voltage : AC1600V/1Min
- 5.Operating temperature : -40°C~+120°C
- 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		-	~	+/-
Over	Under	Over	Under	Over	Under	
6	10	10	30	60	100	0.1/10
TO 6	TO 10	TO 24	TO 30	TO 60	TO 150	≤
±0.15±0.20		±0.30±0.30		±0.50±0.70		±1.00 ±1.30 ±2°

7.RoHS Compliance

DG1450-B - XXP - 1Y - 10A (H)
(Series No.) (Poles) (Single Pitch) 10A-(Customer Request)
(Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

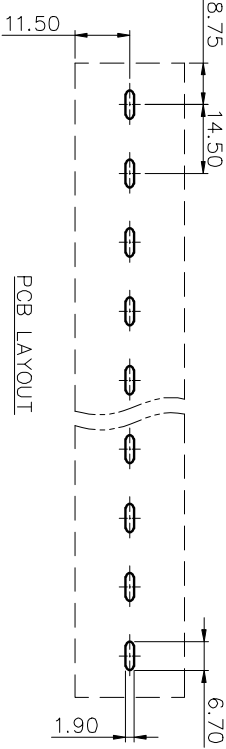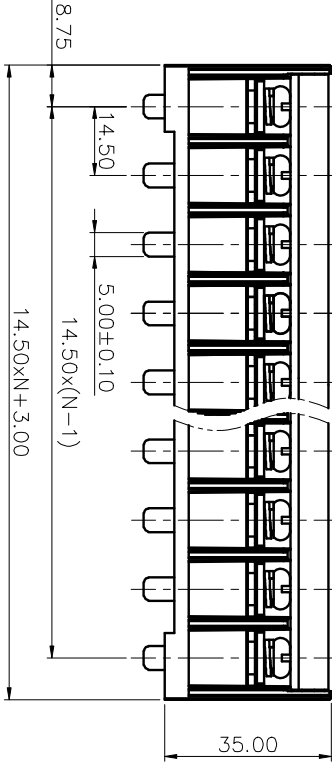

DETACHED LISTS			
PART NO.:	/	NAME:	宁波高松电子有限公司 NINGBO DESSON ELECTRICAL CO., LTD
APPD:		CHKD:	
DRAFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		1:1	1:1