

DIGITUS Cat.6A U/FTP installation cable, 100 m, simplex, B2ca

DK-1626-A-VH-1
EAN 4016032441823



CAT 6A U-FTP installation cable, 500 MHz B2ca (EN 50575), AWG 23/1, 100 m paper box,

The Digitus® Cat.6A U/FTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 500 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class B2ca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-10-1.


Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- System/s of AVCP: AVCP 3
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: None, with drain wire
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C

- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7.0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 56 kg (Eca); 57 kg (Dca); 58 kg (Cca); 58 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 100MHz; 100±25 Ohm @100-500 MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 15 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6A
- Shielding: U-FTP, pairs in metal foil
- CPR: B2ca
- Length: 100 m
- Color: light-blue
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair





Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Inside	1	0.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.00	0.00	0.00	0.00	0.00
Net single without Packaging	1	-0.30	0.00	0.00	0.00	0.00

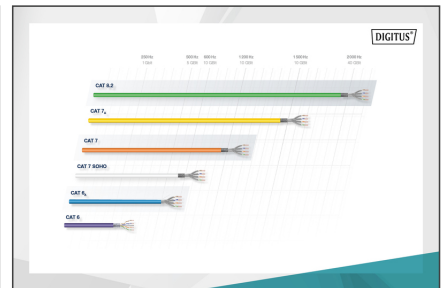[illegible]

Lath pengendalian dalam Transmisi Persewaan									
TRIM	NET	NET	PERIOD	AGE	PERIOD	IN	EXPER	PERIOD	
200	48	48	48	48	48	48	48	48	48
1	3.7	46	32	40.3	40.3	25	46	46	
15	10	39	47	36.1	37.7	20	46	46	
180	46.1	36	77	34.8	34.9	34.1	36	36	
200	35.1	46	45	34.9	34.9	17.1	36	17	
180	46.1	37	34	37.7	37.7	35.2	34	17	

Prokalamation Product Information		Digitus Logo	
Manufacturer/Supplier	Alway (China) Electronics Co., Ltd. (Shenzhen)	Model	868480000, 868480001, 868480002, 868480003, 868480004, 868480005, 868480006, 868480007, 868480008, 868480009, 868480010, 868480011, 868480012, 868480013, 868480014, 868480015, 868480016, 868480017, 868480018, 868480019, 868480020, 868480021, 868480022, 868480023, 868480024, 868480025, 868480026, 868480027, 868480028, 868480029, 868480030, 868480031, 868480032, 868480033, 868480034, 868480035, 868480036, 868480037, 868480038, 868480039, 868480040, 868480041, 868480042, 868480043, 868480044, 868480045, 868480046, 868480047, 868480048, 868480049, 868480050, 868480051, 868480052, 868480053, 868480054, 868480055, 868480056, 868480057, 868480058, 868480059, 868480060, 868480061, 868480062, 868480063, 868480064, 868480065, 868480066, 868480067, 868480068, 868480069, 868480070, 868480071, 868480072, 868480073, 868480074, 868480075, 868480076, 868480077, 868480078, 868480079, 868480080, 868480081, 868480082, 868480083, 868480084, 868480085, 868480086, 868480087, 868480088, 868480089, 868480090, 868480091, 868480092, 868480093, 868480094, 868480095, 868480096, 868480097, 868480098, 868480099, 868480100, 868480101, 868480102, 868480103, 868480104, 868480105, 868480106, 868480107, 868480108, 868480109, 868480110, 868480111, 868480112, 868480113, 868480114, 868480115, 868480116, 868480117, 868480118, 868480119, 868480120, 868480121, 868480122, 868480123, 868480124, 868480125, 868480126, 868480127, 868480128, 868480129, 868480130, 868480131, 868480132, 868480133, 868480134, 868480135, 868480136, 868480137, 868480138, 868480139, 868480140, 868480141, 868480142, 868480143, 868480144, 868480145, 868480146, 868480147, 868480148, 868480149, 868480150, 868480151, 868480152, 868480153, 868480154, 868480155, 868480156, 868480157, 868480158, 868480159, 868480160, 868480161, 868480162, 868480163, 868480164, 868480165, 868480166, 868480167, 868480168, 868480169, 868480170, 868480171, 868480172, 868480173, 868480174, 868480175, 868480176, 868480177, 868480178, 868480179, 868480180, 868480181, 868480182, 868480183, 868480184, 868480185, 868480186, 868480187, 868480188, 868480189, 868480190, 868480191, 868480192, 868480193, 868480194, 868480195, 868480196, 868480197, 868480198, 868480199, 868480200, 868480201, 868480202, 868480203, 868480204, 868480205, 868480206, 868480207, 868480208, 868480209, 868480210, 868480211, 868480212, 868480213, 868480214, 868480215, 868480216, 868480217, 868480218, 868480219, 868480220, 868480221, 868480222, 868480223, 868480224, 868480225, 868480226, 868480227, 868480228, 868480229, 868480230, 868480231, 868480232, 868480233, 868480234, 868480235, 868480236, 868480237, 868480238, 868480239, 868480240, 868480241, 868480242, 868480243, 868480244, 868480245, 868480246, 868480247, 868480248, 868480249, 868480250, 868480251, 868480252, 868480253, 868480254, 868480255, 868480256, 868480257, 868480258, 868480259, 868480260, 868480261, 868480262, 868480263, 868480264, 868480265, 868480266, 868480267, 868480268, 868480269, 868480270, 868480271, 868480272, 868480273, 868480274, 868480275, 868480276, 868480277, 868480278, 868480279, 868480280, 868480281, 868480282, 868480283, 868480284, 868480285, 868480286, 868480287, 868480288, 868480289, 868480290, 868480291, 868480292, 868480293, 868480294, 868480295, 868480296, 868480297, 868480298, 868480299, 868480300, 868480301, 868480302, 868480303, 868480304, 868480305, 868480306, 868480307, 868480308, 868480309, 868480310, 868480311, 868480312, 868480313, 868480314, 868480315, 868480316, 868480317, 868480318, 868480319, 868480320, 868480321, 868480322, 868480323, 868480324, 868480325, 868480326, 868480327, 868480328, 868480329, 868480330, 868480331, 868480332, 868480333, 868480334, 868480335, 868480336, 868480337, 868480338, 868480339, 868480340, 868480341, 868480342, 868480343, 868480344, 868480345, 868480346, 868480347, 868480348, 868480349, 868480350, 868480351, 868480352, 868480353, 868480354, 868480355, 868480356, 868480357, 868480358, 868480359, 86848036

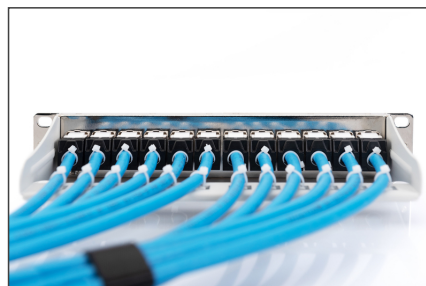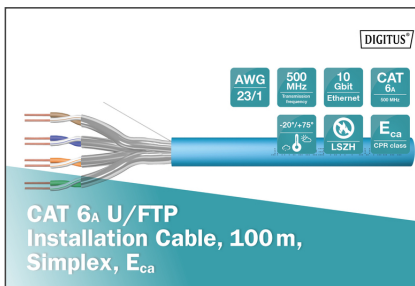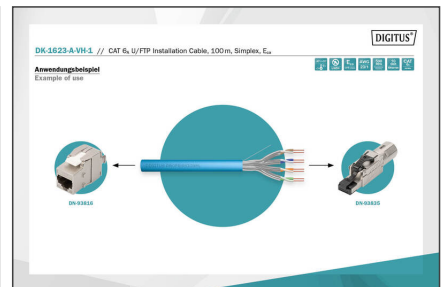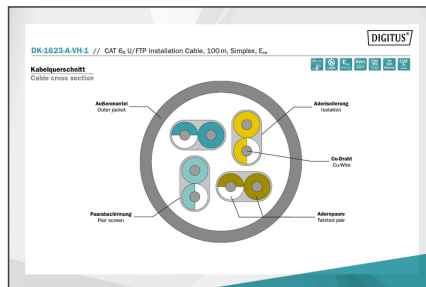

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com