

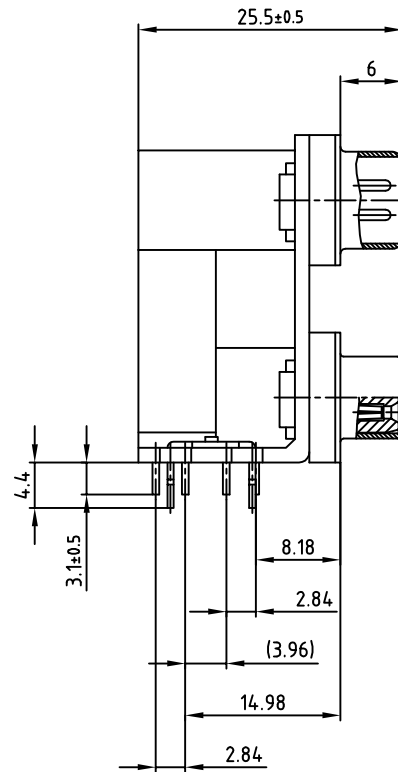


used for: DUAL-PORT

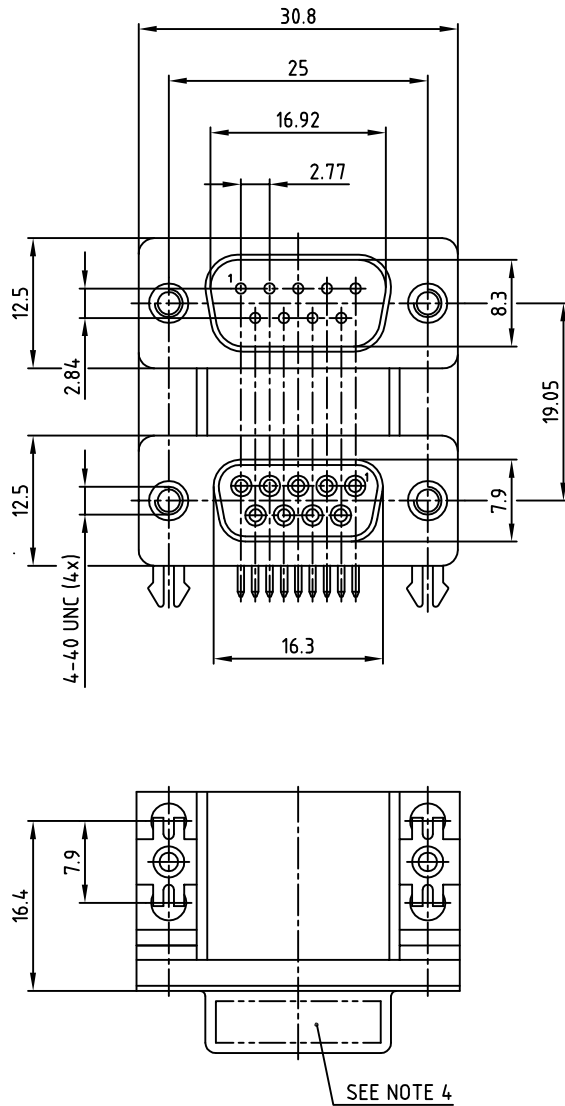

SPECIFICATIONS:

- MATERIAL:**
INSULATOR: PBT, RATED UL 94 V-0
CONTACTS: BRASS
SHELL: STEEL
RIVET, BOARDLOCK: COPPER ALLOY
- CONTACT PLATING:**
UNDERPLATE: 50µin NICKEL
CONTACT AREA: SELECTIVE GOLD
SOLDER TAILS AREA: 100µin TIN / LEAD FREE
- ELECTRICAL:**
CURRENT RATING: 3 Amps Max.
CONTACT RESISTANCE: 25 mohms Max.
INSULATION RESISTANCE: 3000 Mohms min. @ 500 VDC
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC / Minute
OPERATING TEMPERATURE: -55°C TO +105°C
- CONNECTOR IS PART MARKED:** DLS1PS5AN23X CONEC ABC

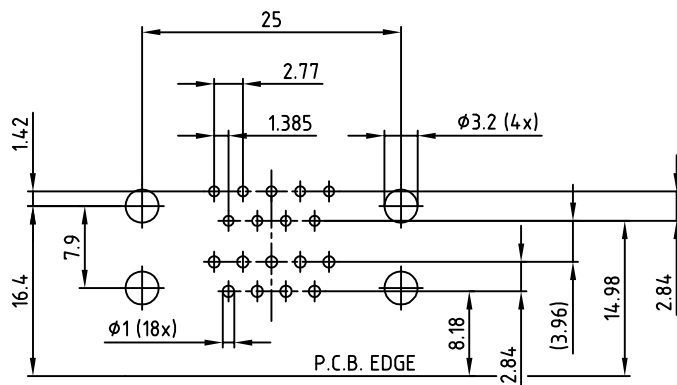

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
TOLERANCES: ±0.10mm

Directive 2002/95/EC RoHS compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance	dim. in mm
2007	date
drawn	10.08.
appd.	10.08.
norm	
d-old	

scale:	2:1
material:	SEE NOTES
title:	
DUAL-PORT 19.05mm MALE / FEMALE 9pos. with PCB clips	
dwg no:	AutoCAD 2006
16K2A1835	
part no:	DLS1PS5AN23X

DIN-A
3
sh: 1/1