
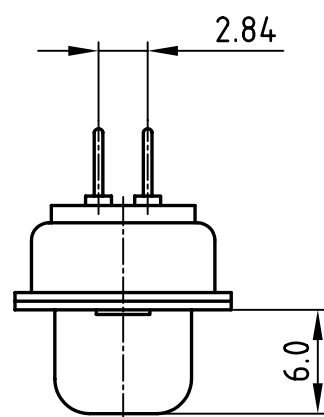


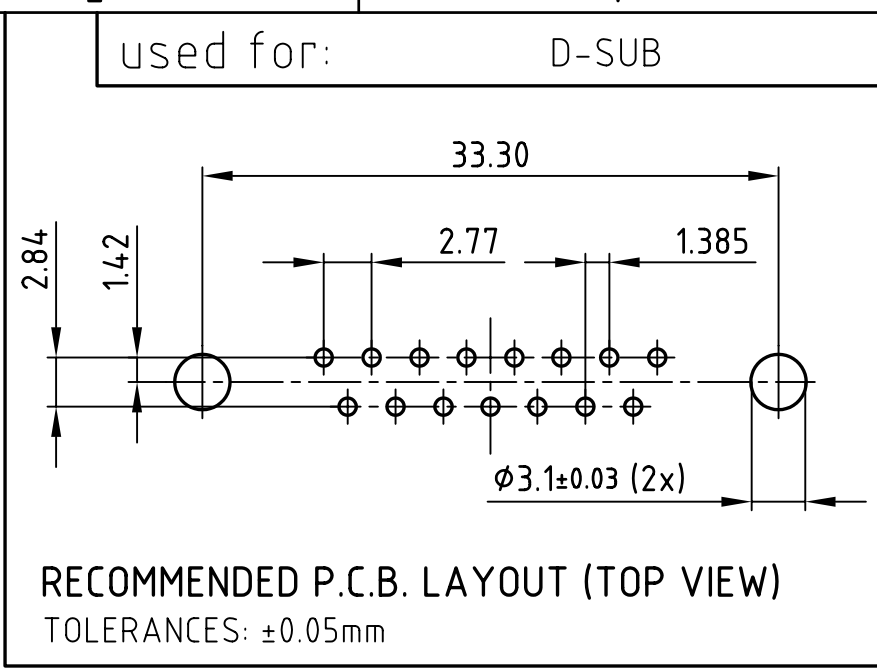

1. MATERIAL

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Shell: Steel

Rivet, Boardlock: Copper Alloy

2. CONTACT PLATING

Underplate: 50µin Nickel

Contact Area: Gold flash

Solder Tails Area: 100µin Tin Lead Free

3. ELECTRICAL

Operation Voltage: 250 VAC max.

Current Rating: 3 A max.

Contact Resistance: 15 mOhm max.


Insulation Resistance: 3000 MOhm min. @ 500 VDC

Dielectric Withstanding Voltage: 1000 VAC / minute

Operating Temperature: -55°C to +105°C

4. CONNECTOR IS PART MARKED: DLS2XS4AD01X CONEC ABC



				tolerance ANG. $\pm 5^\circ$ 0. ± 0.5 .0 ± 0.3 .00 ± 0.2			
				2010	date	name	
				drawn	11.03.	Lehmenkühler	
				appd.	11.03.	Fischer	
				norm			
				d-old			
							
a	Origin						
rev.	description	date	name				

scale:		2:1	
material:		SEE SPECIFICATION	
title:		D-SUB FEMALE 15pos. PCB STRAIGHT	
dwg no:		AutoCAD 2006	DIN-A
16K1A2615			4
			sh: 1/1
product no:		DLS2XS4AD01X	