

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

Technical characteristics:

Specifications

DIN EN 60 664
DIN EN 61 984





Inserts

01. Number of contacts :12+PE
02. Rated Current :10A
03. Rated Voltage :400V
04. Pollution degree : 3
05. Rated impulse voltage :6kV¹⁰
06. Insulation resistance : $\geq 10^9 \Omega$
07. Material: Polycarbonate
08. Limiting temperatures : -40℃~+125℃
09. Flammability acc. to UL94:V0
10. Mechanical working life (mating cycles) : ≥ 500

Contacts

01. Material: Copper alloy
02. Surface: hard-Silver plated
: hard-Gold plated
03. Contact resistance : $\leq 3m\Omega$
04. Terminal : Crimp terminal
05. Wire gauge : 0.14~2.5mm² (AWG 26-14)
06. Stripping length : 6-8mm
07. RoHS Compliance

Note: Crimp contact pins should
order separately

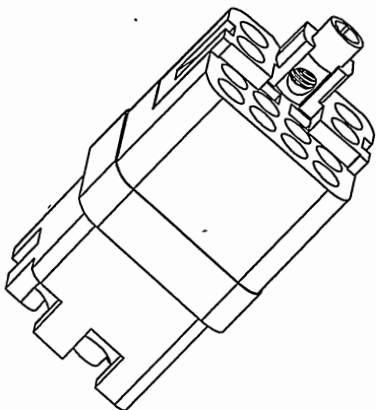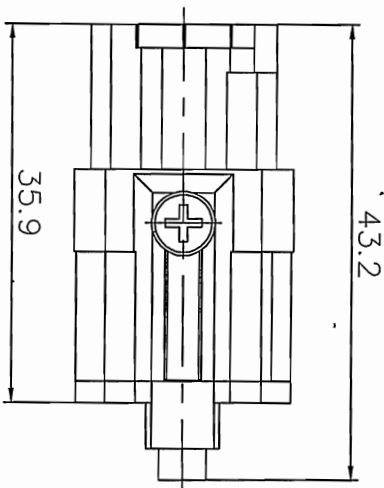

DETACHED LISTS

PART NO.:	/	NAME:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
APPROD:	115 2016-02-20	DRAWING NO.:	DO-1
CHKD:	115 2016-02-20	REV	1/1
DFT:	Mr. Yang 2016.09.25	DO NOT SCALE DRAWING	SCALE
THIRD ANGLE PROJECTION		MM (INCH)	1:5:1