


SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

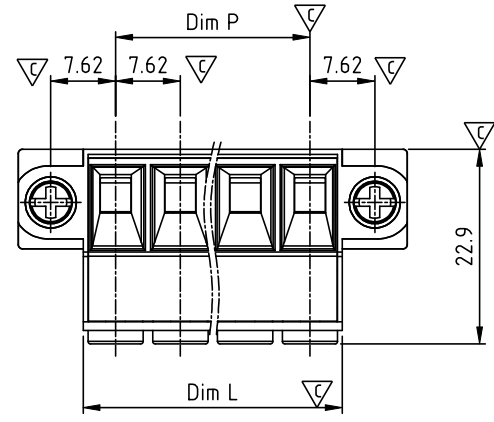

ETxx02xCxxxxG

No. OF POLES
02: 2 POLES
:
16: 16 POLES



COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)

G RoHS compliant (lead<4%)
In copper Alloy
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by customer request, please contact sales department.

- Material:
- Item ㉑ Terminal(housing): Thermoplastic (UL94V-0)
 - Item ㉒ Terminal(cover): Thermoplastic (UL94V-0)
 - Item ㉓ Clamp: Brass Ni plated
 - Item ㉔ Female contact : Copper. Tin plated
 - Item ㉕ Wire guard: Stainless steel
 - Item ㉖ Terminal Screw: Steel , zinc plating "✱" slot type
 - Item ㉗ With flange Screw: Steel Zinc plating M3"+/-" slot type

- Electrical: cULus
- Voltage rating: 600 V
 - Current rating: 41 A
 - Wire range:
 - Solid wire(AWG): 8-24
 - Stranded wire(AWG): 8-24
 - Torque: 9 LB-In
 - Screw: M3.5
 - Wire strip length: 10-11 mm
 - Withstanding Voltage: 2.2KV
 - Operating temperature: -40°C to +115°C
 - Safety Approval: cULus
 - Critical dimension: △

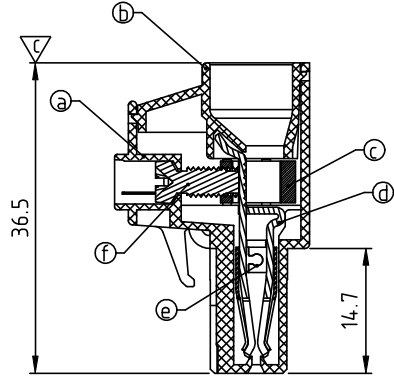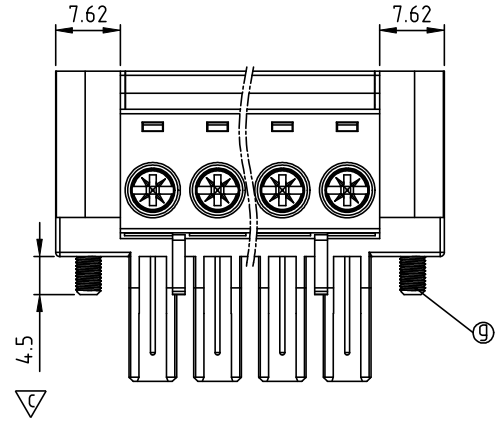

DIM		TOL			
		2P-4P	5P-8P	9P-12P	13P-16P
Dim	N×7.62	±0.15	±0.20	±0.30	±0.40
Dim P	(N-1)×7.62	±0.15	±0.20	±0.30	±0.40

ANYTEK

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

CUSTOMER COPY

TITLE	ET-7.62 W/Flange Series (Match KT series)						
PART NO.	ETxx02xCxxxxG				DWG NO.	8ET0032	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Chen Bo 03/28`13	Chen Bo 03/28`13				
					UNIT: mm	Tolerance	
					SCALE: NONE	X. ±0.50	X.X ±0.30
				SHEET: 01/01	REV. B	X.XX ±0.10	X° ±1°