

RoHS Compliant

ETxx02xGxxxxG

No. OF POLES
02: 2 POLES
:
16: 16 POLES

COLOR




- 0 Black (RAL9005)
- 2 Red (RAL3001/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7035/D)
- 9 White(RAL1102)
- C Green(RAL6018/U)

G RoHS compliant
(lead<4%)
In copper Alloy
0000: "@" Logo (Standard)
000A: "ANYTEK" Mark
Any special item by
customer request.
please contact sales
department.

Material:

- Item ① Terminal(housing): Thermoplastic (UL94V-0)
- Item ② Terminal(cover): Thermoplastic (UL94V-0)
- Item ③ Clamp: Brass Ni plated
- Item ④ Female contact : Copper. Tin plated
- Item ⑤ Wire guard: Stainless steel
- Item ⑥ Terminal Screw: Steel , zinc plating "✱" slot type
- Item ⑦ With flange Screw: Steel Zinc plating M3"+/-" slot type

- △ Electrical: cULus
- Voltage rating: 300 V
 - Current rating: 41 A
 - Wire range:
 - Solid wire(AWG): 8-24
 - Stranded wire(AWG): 8-24
 - Torque: 7 LB-In
 - Screw: M3.5
 - Wire strip length: 10-11 mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - △ Safety Approval: 
 - Critical dimension: ▲

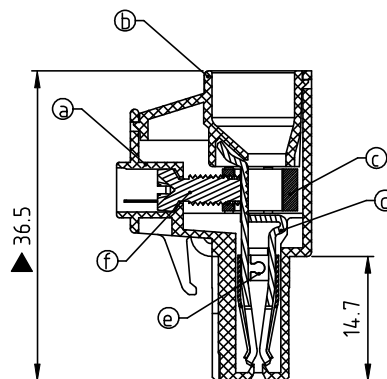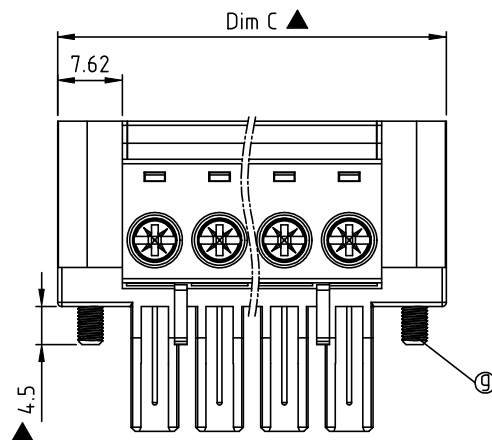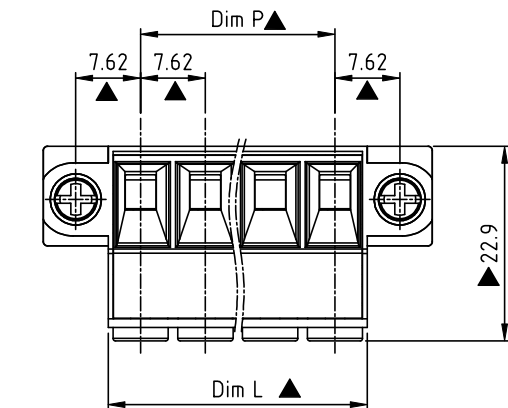

DIM		TOL			
		2P-4P	5P-8P	9P-12P	13P-16P
Dim L	N×7.62	±0.15	±0.20	±0.30	±0.40
Dim P	(N-1)×7.62	±0.15	±0.20	±0.30	±0.40
Dim C	(N+2)×7.62	±0.15	±0.20	±0.30	±0.40

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	ET-7.62 W/Flange Series "✱" (Match VC three tail type series)						
PART NO.	ETxx02xGxxxxG			DWG NO.	8ET0043		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Zia 2018.04.11	Chen Bo 11/08 '13		UNIT: mm	Tolerance	
				SHEET: 01/01	SCALE: NONE	X.	±0.50
					REV. C	X.X	±0.30
						X.XX	±0.10
						X°	±1°