




EWF.00.250.NTLPV

MECHANICAL DETAILS


Shell Style Model	EWF* : Fixed receptacle nut fixing vacuum-tight (back panel mounting)
Keying	Circular (can rotate)
Housing Material	Brass (nickel plated) shell, collet nut, latch sleeve and mid pieces
Cable Fixing	0 - 0 mm
Variant 2	PV : Watertight / Vacuum-tested

	A	L	Weight
Mm.	10.3	17	4.2
In.	0.41	0.67	0.17




PERFORMANCE DETAIL

Insert	0.25 : 1 Coax (50 Ohm)
Insulator	T: PTFE
Specifications	
Contact Type:	Coaxial 50 Ohm (Solder)
Max. Matings:	5000
Contact Dia.:	0.7 mm (0.028in)
Bucket Dia.:	0.6 mm (0.024in)
R (max):	6.1 mOhm



OTHER CHARACTERISTICS

Endurance (Shell)	Endurance (Shell):
F ret (min):	100 N
R leak (He) (max):	0.0000001 mbar*l/s (if vacuum-tested)
Pressure	60 bars
IP Rating	68

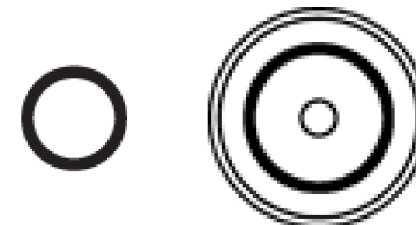

Available Download



00and01Coaxial_en.pdf

Related links

- [Contact](#)
- [Quote Request](#)
- [Catalogs Downloads](#)
- [Catalogs Requests](#)
- [Sample Request](#)
- [3D drawings](#)