



TECHNICAL DATA



Plasterboard fixing **GK**



Plasterboard fixing **GKS**

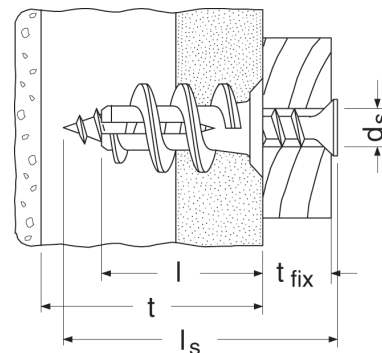

Item	Art.-No.	Anchor length l [mm]	Min. thickness to first supporting layer t [mm]	Max. fixture thick- ness t _{fix} [mm]	Screw d _s x l _s [mm]	Drive	Sales unit [pcs]
GK	052389 1) 2)	22	25	—	4,0 - 5,0 x l _s	—	100
GK S	052390 1) 3)	22	25	13	4,5 x 35	PZ2	50

1) Including installation tool GKW.

2) Min. screw length = length of plug 22 mm + thickness of building component.

3) Supplied with plasterboard screw.

ACCESSORIES



Installation tool **GKW**



PROFI-BOX GK

Item	Art.-No.	Contents	Sales unit [pcs]
GKW	052393	-	10
PROFI-BOX GK	518528	50 Plasterboard fixings GK, 1 Installation tool, 38 Chipboard screws 4,5 x 35, 6 Angle hooks 4,2 x 40, 6 Round hooks 4 x 46	1

LOADS

Plasterboard fixing GK

Highest recommended loads¹⁾ for a single anchor.

The given loads are valid for chipboard screws with the specified diameter.

Type		GK
Chipboard screw	Ø [mm]	4,0 - 5,0
Recommended loads in the respective base material F_{rec} ²⁾		
Gypsum plasterboard	9,5 mm [kN]	0,07
Gypsum plasterboard	12,5 mm [kN]	0,08
Gypsum plasterboard	2 x 12,5 mm [kN]	0,11

¹⁾ Required safety factors are considered.

²⁾ Valid for tensile load, shear load and oblique load under any angle.