


KEMET, FLLD3-PV, EMI/RFI Filters, Noise Suppression, 520 VAC, 1.6 kA, 400x250x160mm

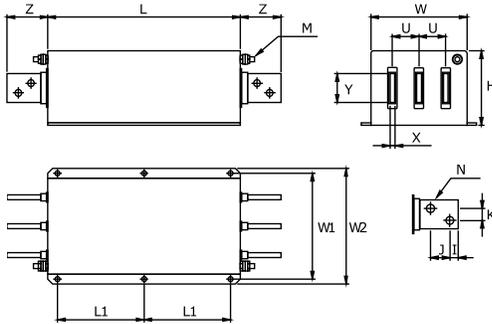

Dimensions

L	400mm NOM
W	250mm NOM
H	160mm NOM
L1	170mm NOM
W1	275mm NOM
W2	300mm NOM
U	60mm NOM
X	10mm NOM
Y	60mm NOM
Z	95mm NOM
I	17mm NOM
J	26mm NOM
K	26mm NOM
N	14mm NOM
M (Earth)	Threaded Studs M12
Lead	Threaded Studs M12

Packaging Specifications

Packaging:	Bulk
Packaging Quantity:	1
Weight:	26 kg

General Information

Series:	FLLD3-PV
Style:	Chassis Mount
Description:	EMI Filter, Chassis Mount, With Y Capacitor
Features:	Three Phase, High Performance, High Voltage
RoHS:	Yes
Qualifications:	IEC/EN 60939, UL 1283
Lead:	Threaded Studs M12

Specifications

Voltage AC:	520 VAC
Rated Frequency:	50-60 Hz
Ripple Current:	1600 A (50°C)
Rated Temperature:	50°C
Temperature Range:	-40/+100°C
Climate Category:	40/100/21
Test Voltage DC (P to P):	2250 VDC
Test Voltage DC (P to E):	3000 VDC
Voltage:	2250 VDC (Test P to P), 3000 VDC (Test P to E)
Power Loss:	130 W (25°C 50 Hz)
Leakage Current:	5 mA (MAX)