

PHILIPS

Fortimo

LED

Fortimo LEDFlex 500lm/m
9xx G1



Datasheet

Fortimo LEDFlex system

Key features and benefits

- Ideal for built-in applications on aluminum extrusions and for various decorative lighting applications such as cove lighting, indoor facade accent lighting.
- Luminous flux range of 500/1000/1500/2000/2500 lm/m
- Colour temperature 2700/3000 Premium White/4000 Premium White/6500 K/WWR with 3 SDCM color consistency
- CRI 90
- Efficacy up to 125 lm/W
- Extremely narrow pitch distance enables outstanding uniformity with 140 leds per meter even with a short distance to the diffuser
- High design freedom by cut-options every 5 cm
- Self-adhesive 3M tape on the back for simple and reliable mounting on various surfaces
- PCB to PCB and wire to PCB connectors for toolless handling and connection
- Life-time of 50,000 hours
- Five year warranty

April 2022



indirect



instant



Ordering data

Commercial product name	EOC	12NC	EPREL registration #	Box quantity
Fortimo LEDFlex 5m 500lm/m 927 C5 G1	8719514 359130 00	9290 028 80680	791763	15
Fortimo LEDFlex 5m 500lm/m 930PW C5 G1	8719514 359383 00	9290 028 80780	791790	15
Fortimo LEDFlex 5m 500lm/m 940PW C5 G1	8719514 359413 00	9290 028 80880	791755	15
Fortimo LEDFlex 50m 500lm/m 930PW C5 G1	8719514 359628 00	9290 028 81480	791753	5
Fortimo LEDFlex 50m 500lm/m 940PW C5 G1	8719514 359642 00	9290 028 81580	791793	5

Drive currents

Parameter	Nominal*	Life**	Max***	Unit
Fortimo LEDFlex 500lm/m 9xx G1	183	201	201	mA

Module temperatures

Parameter	Nominal*	Life**	Max***	Unit
T _c (case temperature at T _c point)	65	75	85	°C

* Nominal value at which typical performance is specified

** Value at which life time is specified

*** Maximum value for safe operation, do not operate above this value


Optical characteristics - table per color (CCT)

Fortimo LEDFlex 5m 500lm/m 927 C5 G1

Parameter	Min	Typ	Max	Unit
Luminous flux	450	500	550	lm
Efficacy		114		lm/W
Correlated color temperature (CCT)		2700		K
Color coordinates (CIEx, CIEy)		(0.458, 0.410)		-
Color consistency			3	SDCM
CRI	90			
R9	50			
Photometric code		927/359		
Photobiological safety			RG1 unlimited	

Flux expressed per meter

Measurement precision for flux +/- 5%, for efficacy +/- 6%, for x, y +/- 0.005, for CRI +/- 1.5

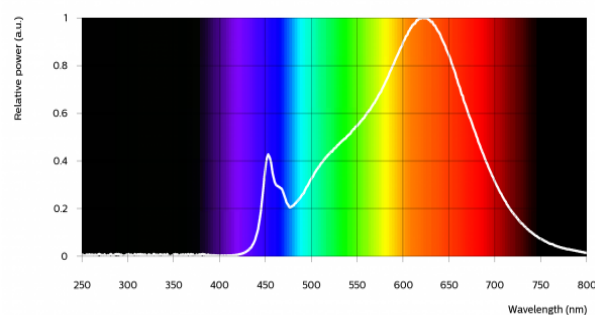


Fortimo LEDFlex 5m 500lm/m 930PW C5 G1

Fortimo LEDFlex 50m 500lm/m 930PW C5 G1

Parameter	Min	Typ	Max	Unit
Luminous flux	450	500	550	lm
Efficacy		119		lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.422, 0.386)		-
Color consistency			3	SDCM
CRI	90			
R9	50			
Photometric code		930/359		
Photobiological safety			RG1 unlimited	

Flux expressed per meter


Measurement precision for flux +/- 5%, for efficacy +/- 6%, for x, y +/- 0.005, for CRI +/- 1.5

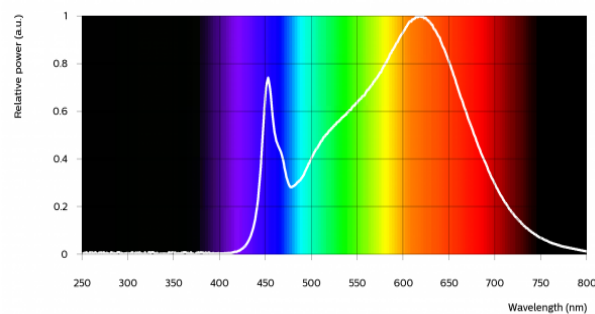

Fortimo LEDFlex 5m 500lm/m 940PW C5 G1
 Fortimo LEDFlex 50m 500lm/m 940PW C5 G1

Parameter	Min	Typ	Max	Unit
Luminous flux	450	500	550	lm
Efficacy		129		lm/W
Correlated color temperature (CCT)		4000		K
Color coordinates (CIEx, CIEy)		(0.374, 0.364)		-
Color consistency			3	SDCM
CRI	90			
R9	50			
Photometric code	E A G	940/359		
Photobiological safety			RG1 unlimited	

Flux expressed per meter
 Measurement precision for flux +/- 5%, for efficacy +/- 6%, for x, y +/- 0.005, for CRI +/- 1.5

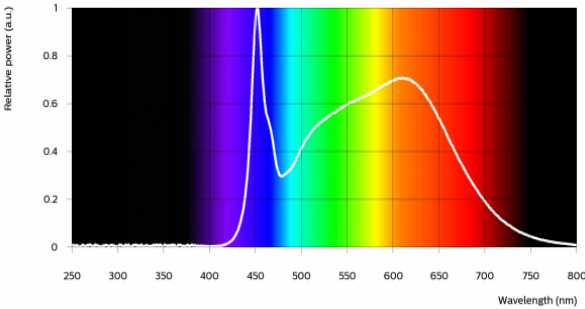

Electrical characteristics

Fortimo LEDFlex 5m 500lm/m 927 C5 G1

Parameter	Min	Typ	Max	Unit
Forward voltage	22.8	24.0	25.2	V
Power consumption	4.17	4.39	4.61	W = kWh/1000h

Power expressed per meter. Measurement precision for power +/- 3.3%.

Maximum LEDFlex length is 12 meter, using 250mm cable at Tc nominal where luminous flux is above 90% of claimed.

For details see Design in Guide on www.philips.com/oem.

Fortimo LEDFlex 5m 500lm/m 930PW C5 G1

Fortimo LEDFlex 50m 500lm/m 930PW C5 G1

Parameter	Min	Typ	Max	Unit
Forward voltage	22.8	24.0	25.2	V
Power consumption	3.99	4.20	4.41	W = kWh/1000h

Power expressed per meter. Measurement precision for power +/- 3.3%.

Maximum LEDFlex length is 12 meter, using 250mm cable at Tc nominal where luminous flux is above 90% of claimed.

For details see Design in Guide on www.philips.com/oem.

Fortimo LEDFlex 5m 500lm/m 940PW C5 G1

Fortimo LEDFlex 50m 500lm/m 940PW C5 G1

Parameter	Min	Typ	Max	Unit
Forward voltage	22.8	24.0	25.2	V
Power consumption	3.69	3.89	4.08	W = kWh/1000h

Power expressed per meter. Measurement precision for power +/- 3.3%.

Maximum LEDFlex length is 12 meter, using 250mm cable at Tc nominal where luminous flux is above 90% of claimed.

For details see Design in Guide on www.philips.com/oem.

Lumen maintenance

Operation point	Lumen maintenance x 1000 hours	L70		
		B50	B20	B10
	Tc 55°C	>50	>50	>50
	Tc 65°C	>50	>50	>50
	Tc 75°C	>50	>50	>50

Lifetime

Parameter	Value	Unit
C10 at Tc life	>50000	hours
M70F50 nominal	>50000	hours
M70F50 life	>50000	hours

Switching cycles in accordance to EU 1194/2012: >15000


Mechanical characteristics

Fortimo LEDFlex 5m 500lm/m 930PW C5 G1

Fortimo LEDFlex 5m 500lm/m 927 C5 G1

Fortimo LEDFlex 5m 500lm/m 940PW C5 G1


Parameter	Min	Typ	Max	Unit
Length		5004		mm
Width	7.8	8	8.2	mm
Height			2	mm
Product mass		70		gram

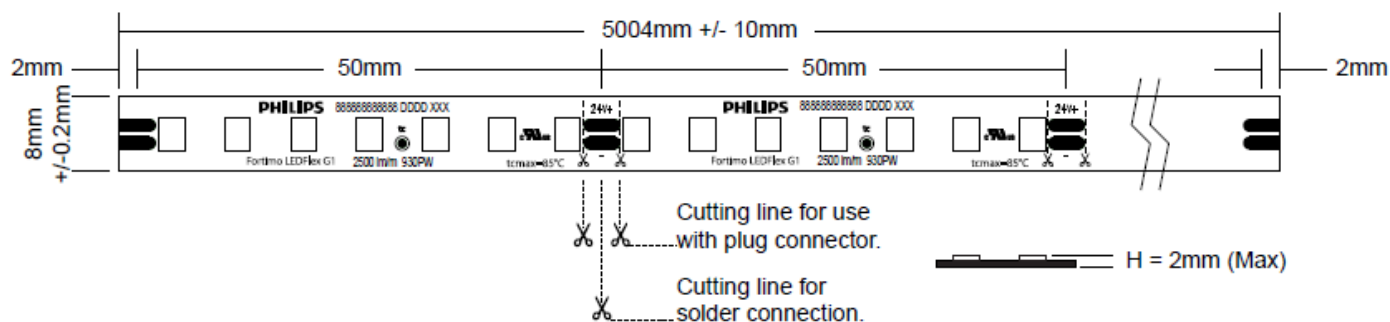

Fortimo LEDFlex 50m 500lm/m 940PW C5 G1

Fortimo LEDFlex 50m 500lm/m 930PW C5 G1

Parameter	Min	Typ	Max	Unit
Length		50004		mm
Width	7.8	8	8.2	mm
Height			2	mm
Product mass		700		gram

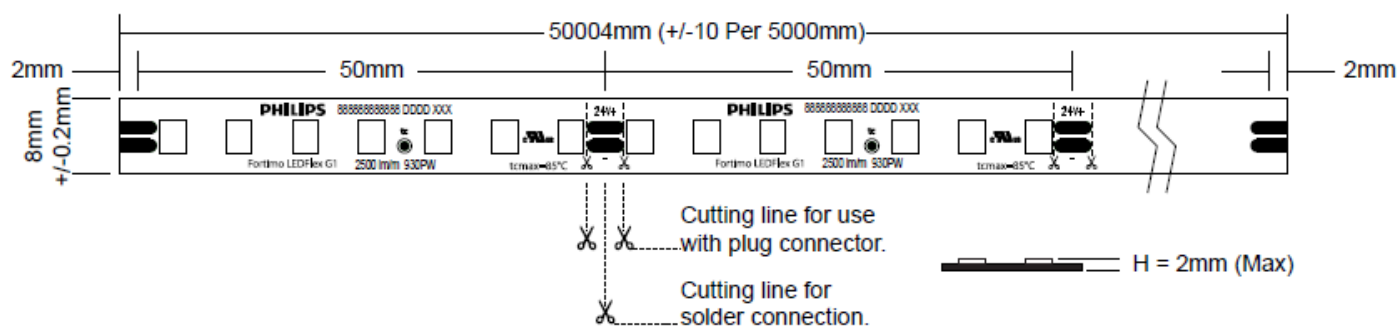

Absolute ratings

Parameter	Min	Max	Unit
Current through the LED module (I-max)		201	mA
Case temperature (Tc-max)		85	°C
ESD (direct contact)	8		kV
ESD (air)	15		kV
Ambient temperature	-20	50	°C
Storage temperature	-30	85	°C

Application information

Certificates and Standards

CB
CE
ENEC
ENEC+
CQC
UKCA

Application

IP rating	no IP-rating
Overheating protection	No protection
Luminaire class	IEC class I, II and III. SELV input only, constant voltage 24V.
Dimming	Yes

Built-in applications only. Dimming by pulse width modulation.



© 2022 Signify Holding, IBRS 10461, 5600VB, NL. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

www.philips.com/oem

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.
UK importer address: Signify Commercial UK Limited, 3 Guildford Business Park, GU2 8XG

27/04/2022