

# Spring-loaded test probe

## GKS-015 305 050 A 1500

Item GKS-015-0019



**ingun**<sup>®</sup>

Partner for Future Technology

- Long-stroke test probe for implementing combined ICT and FCT in a dual-stage fixture
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. spring forces.
- Used for setting the optimum stroke conditions in the test fixture, various installation heights can be achieved by combining test probes and receptacles

### General data

|                                |                                               |
|--------------------------------|-----------------------------------------------|
| Product group                  | ICT / FCT (in-circuit test and function test) |
| Sub-product group              | Long stroke GKS                               |
| Series                         | GKS-015                                       |
| Grid                           | 1.27 mm [50 mil]                              |
| Contacting from                | Pad, Female connector                         |
| Magnetic                       | Yes                                           |
| Installation type              | Plug-in                                       |
| Quick-exchange system          | Yes                                           |
| Adjustable installation height | No                                            |
| Non-rotating                   | No                                            |
| Compatible receptacle(s)       | KS-050                                        |
| Min. temperature               | - 40 °C [- 104 °F]                            |
| Max. temperature               | + 80 °C [+ 176 °F]                            |
| RoHS-compliant                 | RoHS-3;6c                                     |

### Electrical data



|                                       |          |
|---------------------------------------|----------|
| Current load capacity / rated current | 2 A      |
| Typical resistance (RI)               | <20 mOhm |

### Mechanical data

|                                |                   |
|--------------------------------|-------------------|
| Total length                   | 48.5 mm [1.90 in] |
| Barrel diameter                | 0.78 mm [.030 in] |
| Maximum stroke                 | 10 mm [.393 in]   |
| Spring pre-load                | 0.43 N [1.54 ozf] |
| Collar height                  | 00                |
| Spring force at working stroke | 1.5 N [5.39 ozf]  |
| Recommended working stroke     | 8 mm [.314 in]    |

### Tip style data

|                    |                               |
|--------------------|-------------------------------|
| Tip style          | 05 bullet-nosed (full radius) |
| Tip diameter       | 0.5 mm [.019 in]              |
| Tip style surface  | A gold                        |
| Tip style material | 3 CuBe                        |

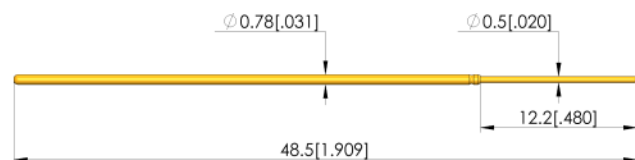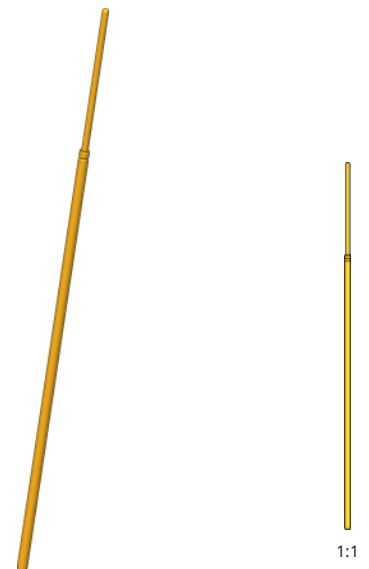

# Spring-loaded test probe


## GKS-015 305 050 A 1500

Item GKS-015-0019



**ingun**<sup>®</sup>

Partner for Future Technology

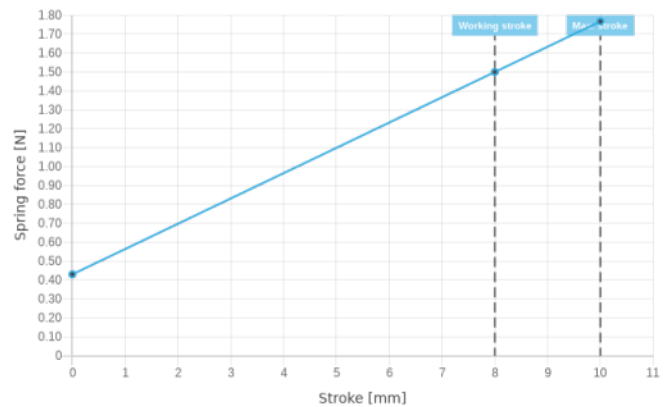

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 08/23 EN

Learn more about  
ICT/FCT Test probes

